




- Apparecchio di illuminazione che impiega LED ad alto rendimento.
- Installazione a soffitto.
- Luce monocromatica.
- Composto da cornice, corpo, lente, molle di fissaggio.
- Cornice in stampo di ABS, verniciato.
- Corpo dissipatore in pressofusione di alluminio (K 35) o in estrusione di alluminio (K 55).
- Lente in PMMA in 2 versioni di fasci diversi.
- Molle di fissaggio in nylon (K 35) o in acciaio armonico (K 55).
- Collegamento elettrico ad alimentatore tramite cavo FROR.
- LED monocromatici bianchi in 2 temperature di colore:
Caldo = 3000K
Neutro = 4000K
- Grado di protezione IP20.
- Classe elettrica III.
- Caratteristiche tecniche degli apparecchi conformi alla EN60598-1.
- Il montaggio va eseguito da personale specializzato.
- Seguire scrupolosamente le istruzioni.

- Light fixture with high-performance LED light sources.
- Ceiling installation.
- Composed by: frame, body, lens, fixing springs.
- Frame in injection mould of ABS, painted.
- Heat sink body in injection mould of aluminium (K 35) or in extruded aluminium (K 55).
- Lens in PMMA with 2 different versions of beam.
- Fixing springs in nylon (K 35) or in harmonic steel (K 55).
- Electrical connection to the driver by means of a FROR cable.
- White monochromatic LEDs available in 2 colour temperatures:
Warm = 3000K
Neutral = 4000K
- IP Rating IP20.
- Insulation class III.
- Technical features of light fixtures in compliance with EN60598-1.
- Installation must be carried out by specialized personnel.
- Carefully follow the instructions.




K 55 Round

● grigio
● nero
○ bianco
Cornice in ABS
Molle fissaggio
in acciaio armonico
Alimentatore remoto
fornito a parte


● grey
● black
○ white
Frame in ABS
Fixing springs in
harmonic steel
Remote driver supplied
separately

	Source	Power	CCT	Beam	Efficacy	
NL4203518K002	1 LED	7W	3000K	18°	48 lm/W	●
NL4203518W002	1 LED	7W	4000K	18°	51 lm/W	●
NL4203518K004	1 LED	7W	3000K	18°	48 lm/W	●
NL4203518W004	1 LED	7W	4000K	18°	51 lm/W	●
NL4203518K006	1 LED	7W	3000K	18°	48 lm/W	○
NL4203518W006	1 LED	7W	4000K	18°	51 lm/W	○



K 55 - 7W - 3000K - 18°

NL4203534K002	1 LED	7W	3000K	34°	48 lm/W	●
NL4203534W002	1 LED	7W	4000K	34°	51 lm/W	●
NL4203534K004	1 LED	7W	3000K	34°	48 lm/W	●
NL4203534W004	1 LED	7W	4000K	34°	51 lm/W	●
NL4203534K006	1 LED	7W	3000K	34°	48 lm/W	○
NL4203534W006	1 LED	7W	4000K	34°	51 lm/W	○




K 55 - 7W - 3000K - 34°

CRI 80 min.	3000K 340 lm	4000K 361 lm	IP20	F	III	Kg 0,20	CE	DE
----------------	-----------------	-----------------	------	---	-----	------------	----	----

alimentazione elettronica 500mA
500mA electronic ballast

NL10941	Alimentatore Driver	8W	500mA	1 max
NL19034	Alimentatore Driver	20W	500mA	2 max




K 55 Square

● grigio
● nero
○ bianco
Cornice in ABS
Molle fissaggio
in acciaio armonico
Alimentatore remoto
fornito a parte


● grey
● black
○ white
Frame in ABS
Fixing springs in
harmonic steel
Remote driver supplied
separately

	Source	Power	CCT	Beam	Efficacy	
NL4203418K002	1 LED	7W	3000K	18°	48 lm/W	●
NL4203418W002	1 LED	7W	4000K	18°	51 lm/W	●
NL4203418K004	1 LED	7W	3000K	18°	48 lm/W	●
NL4203418W004	1 LED	7W	4000K	18°	51 lm/W	●
NL4203418K006	1 LED	7W	3000K	18°	48 lm/W	○
NL4203418W006	1 LED	7W	4000K	18°	51 lm/W	○



K 55 - 7W - 3000K - 18°

NL4203434K002	1 LED	7W	3000K	34°	48 lm/W	●
NL4203434W002	1 LED	7W	4000K	34°	51 lm/W	●
NL4203434K004	1 LED	7W	3000K	34°	48 lm/W	●
NL4203434W004	1 LED	7W	4000K	34°	51 lm/W	●
NL4203434K006	1 LED	7W	3000K	34°	48 lm/W	○
NL4203434W006	1 LED	7W	4000K	34°	51 lm/W	○



K 55 - 7W - 3000K - 34°

CRI 80 min.	3000K 340 lm	4000K 361 lm	IP20	F	III	Kg 0,20	CE	DE
----------------	-----------------	-----------------	------	---	-----	------------	----	----

alimentazione elettronica 500mA
500mA electronic ballast

NL10941	Alimentatore Driver	8W	500mA	1 max
NL19034	Alimentatore Driver	20W	500mA	2 max

K 55 Adjustable



K 55 Round Adjustable

● grigio

● nero

○ bianco

Cornice in ABS

Molle fissaggio

in acciaio armonico

Alimentatore remoto

fornito a parte

Orientazione: +25°

● grey

● black

○ white

Frame in ABS

Fixing springs in

harmonic steel

Remote driver supplied

separately

Tilting angle: +25°


	Source	Power	CCT	Beam	Efficacy	
NL4203318K002	1 LED	7W	3000K	18°	48 lm/W	●
NL4203318W002	1 LED	7W	4000K	18°	51 lm/W	●
NL4203318K004	1 LED	7W	3000K	18°	48 lm/W	●
NL4203318W004	1 LED	7W	4000K	18°	51 lm/W	●
NL4203318K006	1 LED	7W	3000K	18°	48 lm/W	○
NL4203318W006	1 LED	7W	4000K	18°	51 lm/W	○

NL4203334K002	1 LED	7W	3000K	34°	48 lm/W	●
NL4203334W002	1 LED	7W	4000K	34°	51 lm/W	●
NL4203334K004	1 LED	7W	3000K	34°	48 lm/W	●
NL4203334W004	1 LED	7W	4000K	34°	51 lm/W	●
NL4203334K006	1 LED	7W	3000K	34°	48 lm/W	○
NL4203334W006	1 LED	7W	4000K	34°	51 lm/W	○

CRI 80 min.	3000K 340 lm	4000K 361 lm	IP20	F	III	Kg 0,20	CE	DE
----------------	-----------------	-----------------	------	---	-----	------------	----	----

alimentazione elettronica 500mA
500mA electronic ballast

NL10941	Alimentatore Driver	8W	500mA	1 max
NL19034	Alimentatore Driver	20W	500mA	2 max




78,5


ø 55




ø 50 ±2mm



K 55 - 7W - 3000K - 18°



K 55 - 7W - 3000K - 34°



K 55 Square Adjustable

● grigio

● nero

○ bianco

Cornice in ABS

Molle fissaggio

in acciaio armonico

Alimentatore remoto

fornito a parte

Orientazione: +25°

● grey

● black

○ white

Frame in ABS

Fixing springs in

harmonic steel

Remote driver supplied

separately

Tilting angle: +25°


	Source	Power	CCT	Beam	Efficacy	
NL4203218K002	1 LED	7W	3000K	18°	48 lm/W	●
NL4203218W002	1 LED	7W	4000K	18°	51 lm/W	●
NL4203218K004	1 LED	7W	3000K	18°	48 lm/W	●
NL4203218W004	1 LED	7W	4000K	18°	51 lm/W	●
NL4203218K006	1 LED	7W	3000K	18°	48 lm/W	○
NL4203218W006	1 LED	7W	4000K	18°	51 lm/W	○

NL4203234K002	1 LED	7W	3000K	34°	48 lm/W	●
NL4203234W002	1 LED	7W	4000K	34°	51 lm/W	●
NL4203234K004	1 LED	7W	3000K	34°	48 lm/W	●
NL4203234W004	1 LED	7W	4000K	34°	51 lm/W	●
NL4203234K006	1 LED	7W	3000K	34°	48 lm/W	○
NL4203234W006	1 LED	7W	4000K	34°	51 lm/W	○

CRI 80 min.	3000K 340 lm	4000K 361 lm	IP20	F	III	Kg 0,20	CE	DE
----------------	-----------------	-----------------	------	---	-----	------------	----	----

alimentazione elettronica 500mA
500mA electronic ballast

NL10941	Alimentatore Driver	8W	500mA	1 max
NL19034	Alimentatore Driver	20W	500mA	2 max




78,5


55



□ 50 ±2mm




K 55 - 7W - 3000K - 18°



K 55 - 7W - 3000K - 34°

K 55 10W Round



K 55 10W Round

● grigio

● nero

○ bianco

Cornice in ABS

Molle fissaggio

in acciaio armonico

Alimentatore remoto
fornito a parte

● grey

● black

○ white


Frame in ABS

Fixing springs in

harmonic steel


Remote driver supplied
separately

	Source	Power	CCT	Beam	Efficacy	
NL4204118K002	1 LED	10W	3000K	18°	66 lm/W	●
NL4204118W002	1 LED	10W	4000K	18°	70 lm/W	●
NL4204118K004	1 LED	10W	3000K	18°	66 lm/W	●
NL4204118W004	1 LED	10W	4000K	18°	70 lm/W	●
NL4204118K006	1 LED	10W	3000K	18°	66 lm/W	○
NL4204118W006	1 LED	10W	4000K	18°	70 lm/W	○

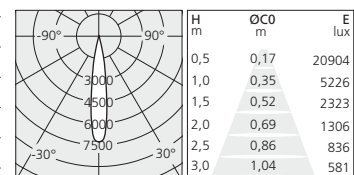

K 55 - 10W - 3000K - 18°

NL4204134K002	1 LED	10W	3000K	34°	66 lm/W	●
NL4204134W002	1 LED	10W	4000K	34°	70 lm/W	●
NL4204134K004	1 LED	10W	3000K	34°	66 lm/W	●
NL4204134W004	1 LED	10W	4000K	34°	70 lm/W	●
NL4204134K006	1 LED	10W	3000K	34°	66 lm/W	○
NL4204134W006	1 LED	10W	4000K	34°	70 lm/W	○

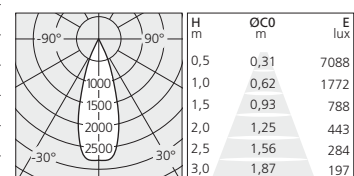

K 55 - 10W - 3000K - 34°

CRI 80 min.	3000K 655 lm	4000K 704 lm	IP20	F	III	kg	0,30	CE	DE
----------------	-----------------	-----------------	------	---	-----	----	------	----	----

alimentazione elettronica 700mA
700mA electronic ballast

NL19036	Alimentatore Driver	20W	700mA	IP20	1 max
---------	---------------------	-----	-------	------	-------


Prodotto disponibile da autunno 2013

Product available from fall 2013

Produit disponible à partir de l'automne 2013

Artikel verfügbar ab Herbst 2013

K 55 10W Square



K 55 10W Square

● grigio

● nero

○ bianco

Cornice in ABS

Molle fissaggio
in acciaio armonico

Alimentatore remoto
fornito a parte

● grey

● black


○ white

Frame in ABS

Fixing springs in
harmonic steel


Remote driver supplied
separately

	Source	Power	CCT	Beam	Efficacy	
NL4204218K002	1 LED	10W	3000K	18°	66 lm/W	●
NL4204218V002	1 LED	10W	4000K	18°	70 lm/W	●
NL4204218K004	1 LED	10W	3000K	18°	66 lm/W	●
NL4204218V004	1 LED	10W	4000K	18°	70 lm/W	●
NL4204218K006	1 LED	10W	3000K	18°	66 lm/W	○
NL4204218V006	1 LED	10W	4000K	18°	70 lm/W	○



K 55 - 10W - 3000K - 18°

NL4204234K002	1 LED	10W	3000K	34°	66 lm/W	●
NL4204234V002	1 LED	10W	4000K	34°	70 lm/W	●
NL4204234K004	1 LED	10W	3000K	34°	66 lm/W	●
NL4204234V004	1 LED	10W	4000K	34°	70 lm/W	●
NL4204234K006	1 LED	10W	3000K	34°	66 lm/W	○
NL4204234V006	1 LED	10W	4000K	34°	70 lm/W	○



K 55 - 10W - 3000K - 34°

CRI 80 min.	3000K 655 lm	4000K 704 lm	IP20	F	III	Kg 0,30	CE	DE
----------------	-----------------	-----------------	------	---	-----	------------	----	----

alimentazione elettronica 700mA
700mA electronic ballast

NL19036	Alimentatore Driver	20W	700mA	IP20	1 max
---------	---------------------	-----	-------	------	-------

Prodotto disponibile da autunno 2013

Product available from fall 2013

Produit disponible à partir de l'automne 2013

Artikel verfügbar ab Herbst 2013