


Giunto a innesto rapido in METALLO per tubi STD e guaine corrugate Connection splice with METAL fitting between STD pipes and corrugated conduits



Applicazione Application

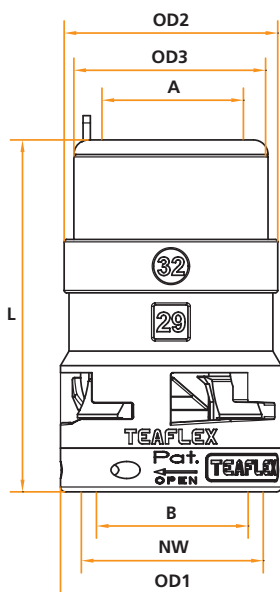

I giunti a innesto rapido in metallo PC, permettono il collegamento tra i tubi rigidi metallici della serie STD e le guaine corrugate riducendo i tempi di installazione con risultato economico e sicuro.

L'ancoraggio ai tubi STD è garantito dal sistema AR già impiegato con successo nel corso degli anni da Teaflex. Soddisfano i requisiti standard nelle installazioni elettriche industriali e nelle applicazioni tecniche ad elevate prestazioni nell'industria pesante e nel settore ferroviario.

Temperatura d'esercizio: -40°C +105°C
Per breve periodo: +150°C

Splice connectors with metal fittings type PC provide practical, economic and secure connections with STD zinc plated pipes, reducing time of installation.

The connection to STD pipes is long time successfully guaranteed by the AR system applied by Teaflex.

Suit to standard requirements in industrial and electro technical installation applications as well as for increased requirements in heavy industry and railway applications.

Temperature Range: -40°C +105°C
Short term: +150°C

Giunto a innesto rapido in METALLO per tubi STD e guaine corrugate

Codice IP68-IP69K	Codice Guaina NW	Diametro metrico guaina	A Tubo STD mm	B mm	L mm	OD1 mm	OD2 mm	OD3 mm	Confezione standard
8BPC1216	12	16	16	14	60,65	24	27	24	50
8BPC1720	17	20	20	18	61,85	30	31	28	50
8BPC2325	23	25	25	22,5	72	38	36	33	30
8BPC2932	29	32	32	29,5	72,5	45,5	44	40	20
8BPC3640	36	40	40	37,5	86	57	55	50	20
8BPC4850	48	50	50	47,5	92,5	68	65	60	10
Type IP68-IP69K	Conduit Code NW	Fits to metric Conduit	A Fits to STD Pipe mm	B mm	L mm	OD1 mm	OD2 mm	OD2 mm	Packing unit

• NON è garantito il grado di protezione IP69K per i raccordi con diametri nominali 36 e 48

• IP69K rating is not guaranteed for the fittings with nominal width 36 and 48

Connection splice with METAL fitting between STD pipes and corrugated conduits



QR CODE: istruzioni di montaggio
QR CODE: assembly instructions

Esempio d'ordine / Order example: **8BPC2932**

8 Grado di protezione: IP69K-IP68 statico / IP67 dinamico
IP Rating: IP69K-IP68 static / IP67 dynamic

B Colore - Colour

PC Codice serie - Family type

29 Diametro nominale guaina - Nominal width

32 Diametro tubo STD - STD pipe nominal width



RINA

