


Raccordi in ottone per connettore serie CM continuità metallica Brass fittings for connector with metallic continuity



QR CODE: istruzioni di
montaggio
QR CODE: assembly
instructions

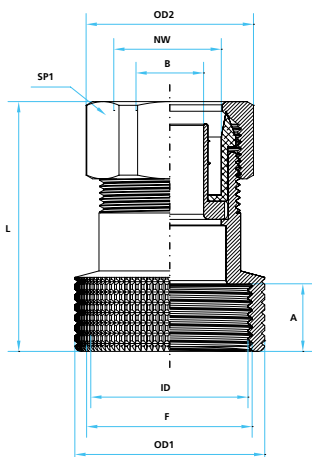

Applicazione Application



Raccordi della serie CM che permettono il collegamento diretto tra guaine L - P - DAR - SVT - T - TP - LPU - DAPU - SVPEVAT e i connettori, eliminando eventuali prolunghe o calotte, riducendo così notevolmente i costi e gli ingombri. Come su tutti i raccordi della serie CM è assicurato un grado di protezione IP 67 e la continuità metallica.

Fittings in the CM series which enable direct connection of conduits L - P - DAR - SVT - T - TP - LPU - DAPU - SVPEVAT and connectors avoiding the need for extensions and covers and consequently considerably reducing expenses and space. Like all the fitting in the CM series, these fittings guarantee IP 67 protection and electrical continuity.

CMCO - Filetto femmina UNEF - Raccordo in ottone con continuità metallica per connettori

Codice	F Filetto UNEF ø nom. - fil. x pollice	Codice Guaina NW	ø guaina mm int. est.	ID ø int. Filetto mm	ø est. Fil. Maschio del connettore mm	A mm	B Passaggio utile mm	L mm	OD1 mm	OD2 mm	SP1 mm	Confezione standard
CMC02110	5/8" - 24 f	10	10,0 - 15,0	14,8	15,9	10,5	8,5	33	20	26	24	20
CMC02210	3/4" - 20 f	10	10,0 - 15,0	17,7	19,1	10,5	8,5	33	23	26	24	20
CMC02212	3/4" - 20 f	12	12,0 - 17,0	17,7	19,1	10,5	10,5	33	24	29	26	20
CMC02312	7/8" - 20 f	12	12,0 - 17,0	20,9	22,3	11	10,5	34	24	29	26	20
CMC02315	7/8" - 20 f	15	15,5 - 21,0	20,9	22,3	1	13,8	35,7	26	33	30	20
CMC02412	1" - 20 f	12	12,0 - 17,0	24,1	25,4	9	10,5	42	29,5	29	26	20
CMC02415	1" - 20 f	15	15,5 - 21,0	24,1	25,4	10,5	13,8	41,7	30	33	30	20
CMC02515	1" 1/8 - 18 f	15	15,5 - 21,0	27,1	28,6	10,5	13,8	42,7	32	33	30	20
CMC02520	1" 1/8 - 18 f	20	20,5 - 27,0	27,1	28,6	10,5	18,5	44	32	42,5	38	10
CMC02615	1" 3/16 - 18 f	15	15,5 - 21,0	28,7	30,2	10,5	13,8	42,7	33	33	30	20
CMC02620	1" 3/16 - 18 f	20	20,5 - 27,0	28,7	30,2	10,5	18,5	45	33	42,5	38	10
CMC02715	1" 1/4 - 18 f	15	15,5 - 21,0	30,3	31,8	10,5	13,8	42,7	35	33	30	20
CMC02720	1" 1/4 - 18 f	20	20,5 - 27,0	30,3	31,8	10,5	18,5	45	35	42,5	38	10
CMC02820	1" 3/8 - 18 f	20	20,5 - 27,0	33,4	35,0	10,5	18,5	47	38	42,5	38	10
CMC02827	1" 3/8 - 18 f	27	26,5 - 34,0	33,4	35,0	11	25	48	38	49,5	45	10
CMC02920	1" 7/16 - 18 f	20	20,5 - 27,0	35,0	36,6	10,5	18,5	47	40	42,5	38	10
CMC02927	1" 7/16 - 18 f	27	26,5 - 34,0	35,0	36,6	11	25	48	40	49,5	45	10
CMC03020	1" 5/8 - 18 f	20	20,5 - 27,0	39,8	41,3	10	18,5	49	44	42,5	38	10
CMC03027	1" 5/8 - 18 f	27	26,5 - 34,0	39,8	41,3	10	25	50	44	49,5	45	10
CMC03127	1" 3/4 - 18 f	27	26,5 - 34,0	43,1	44,5	10	25	50	49,5	49,5	45	10
CMC03135	1" 3/4 - 18 f	35	35,0 - 43,0	43,1	44,5	11	33	51,5	50	58	53	1
CMC03227	1" 7/8 - 18 f	27	26,5 - 34,0	46,2	47,6	11	25	52	52	49,5	45	10
CMC03235	1" 7/8 - 18 f	35	35,0 - 43,0	46,2	47,6	11	33	53,5	50	58	53	1
CMC03335	2" - 18 f	35	35,0 - 43,0	49,3	50,8	11	33	53,5	55	58	53	1
CMC03340	2" - 18 f	40	40,0 - 48,0	49,3	50,8	11	37,5	54,5	55	66,5	61	1
CMC03435	2" 1/16 - 16 f	35	35,0 - 43,0	50,8	52,4	11	33	53,5	55	58	53	1
CMC03440	2" 1/16 - 16 f	40	40,0 - 48,0	50,8	52,4	11	37,5	54,5	56	66,5	61	1
CMC03535	2" 1/4 - 16 f	35	35,0 - 43,0	55,6	57,2	11	33	56,5	60	58	53	1
CMC03540	2" 1/4 - 16 f	40	40,0 - 48,0	55,6	57,2	11	37,5	52,5	60	66,5	61	1
CMC03550	2" 1/4 - 16 f	50	50,5 - 58,5	55,6	57,2	11	48	55	60	80,5	74	1
CMC03635	2" 5/16 - 16 f	35	35,0 - 43,0	57,2	58,7	14	33	56,5	62	58	53	1
CMC03640	2" 5/16 - 16 f	40	40,0 - 48,0	57,2	58,7	14	37,5	57,5	62	66,5	61	1
CMC03650	2" 5/16 - 16 f	50	50,5 - 58,5	57,2	58,7	14	48	60	62	80,5	74	1
REF. Part N.	F UNEF Thread ø NW - pitch x inch	Conduit Code NW	int. ext. ø conduit mm	ID inside ø thread mm	Connector male Out. ø mm	A mm	B useful passage mm	L mm	OD1 mm	OD2 mm	SP1 mm	Packing unit

CMCO - UNEF Female thread - Brass fittings with metallic continuity for connectors

