




EXCMCC

TEAFLEX

www.teaflex.com

Curva a 90° in ottone serie CM continuità metallica
90° brass elbow with metallic continuity

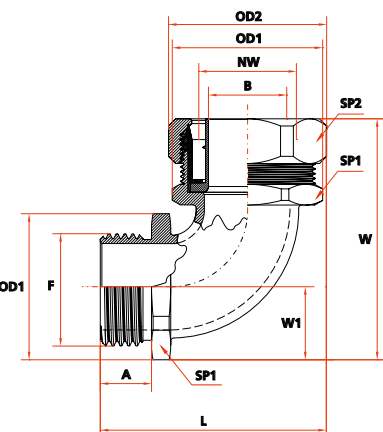

Per guaine tipo: EXL-EXDAR-SVT-
T-TP-SVPEVAT
For conduits type: EXL-EXDAR-SVT-
T-TP-SVPEVAT



I raccordi sono completi della guarnizione GAM
The fittings are equipped with GAM gasket

File E - 124066 140F/60°C

Applicazione Application



La compatibilità con una gamma molto vasta di guaine, rende i raccordi CM i più comuni ed utilizzati in svariati campi di applicazione. In particolare questa curva a 90° è utilizzabile quando non è necessaria l'ispezionabilità.

CM series fittings are compatible with a wide range of conduits and are useful in several applications. Particularly this 90° elbow can be used when inspection is not required.

EXCMCC - Curva a 90° filetto GAS, PG e ISO metrico in ottone con continuità metallica

Codice GAS	F Filetto GAS	Codice PG	F Filetto PG	Codice ISO Metrico	F Filetto ISO metrico	Certificazioni	Codice Guaina NW	Ø guaina mm int. est.	A mm	B mm	L mm	OD1 mm	OD2 mm	SP1 mm	SP2 mm	W mm	W1 mm	Confezione standard
EXCMCCG09	1/4"	EXCMCCP09PG09	9	EXCMCC09M12	M12x1,5	⊕	9	8,5 - 13,0	11	7	44	24	24,5	22	22	52	12	20
				EXCMCC09M16	M16x1,5	⊕	9	8,5 - 13,0	11	7	44	24	24,5	22	22	52	12	20
EXCMCCG10	1/4"	EXCMCCP10PG09	9	EXCMCC10M12	M12x1,5	⊕	10	10,0 - 15,0	11	8,5	44	24	26	22	24	52	12	20
EXCMCCG10A	3/8"	EXCMCCP10PG11	11	EXCMCC10M16	M16x1,5	⊕	10	10,0 - 15,0	11	8,5	44	24	26	22	24	52	12	20
EXCMCCG12	3/8"	EXCMCCP12PG11	11	EXCMCC12M16	M16x1,5	⊕	12	12,0 - 17,0	12	10,5	45	28	29	26	26	54	14	10
EXCMCCG12A	1/2"	EXCMCCP12PG13	13,5	EXCMCC12M20	M20x1,5	⊕	12	12,0 - 17,0	12	10,5	45	28	29	26	26	54	14	10
EXCMCCG15	1/2"	EXCMCCP15PG13	13,5	EXCMCC15M20	M20x1,5	⊕	15	15,5 - 21,0	12	13,8	50	30	33	28	30	54	15	10
		EXCMCCP15PG16	16			⊕	15	15,5 - 21,0	12	13,8	50	30	33	28	30	54	15	10
EXCMCCG20	3/4"	EXCMCCP20PG21	21	EXCMCC20M25	M25x1,5	⊕	20	20,5 - 27,0	13	18,5	60	39	42,5	35	38	69	19,5	5
EXCMCCG25	1"			EXCMCC25M32	M32x1,5	⊕	25	25,0 - 32,0	16	23	70	47	46,5	42	42	79	23,5	2
EXCMCCG27	1"			EXCMCC27M32	M32x1,5	⊕	27	26,5 - 34,0	16	25	72	47	49,5	42	45	79	23,5	2
REF. Part N. GAS	F GAS Thread	REF. Part N. PG	F PG Thread	REF. Part N. ISO Metric	F ISO Metric Thread	Approvals	Conduit code NW	int. Ø conduit mm	A mm	B mm	L mm	OD1 mm	OD2 mm	SP1 mm	SP2 mm	W mm	W1 mm	Packing unit

EXCMCC - 90° Elbow GAS, PG and ISO metric thread brass fittings with metallic continuity

QR CODE: istruzioni di montaggio
QR CODE: assembly instructions

