




SERIE NM  
NM SERIES



### Applicazione Application

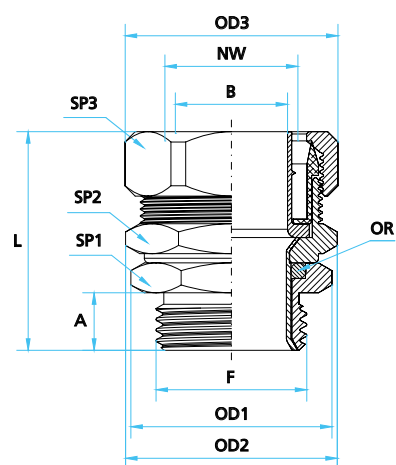

Il collegamento raccordo-guaina viene effettuato mediante una virola ed un anello di nylon.

La particolare costruzione della virola consente l'avvitamento all'interno della guaina metallica, permettendo di ottenere un abbinamento dotato di una ottima resistenza alla trazione e alla vibrazione.

L'anello di nylon invece, bloccando esternamente la guaina flessibile, completa l'accoppiamento raccordo-guaina.

Connection of fitting and conduit are assured by a metal ferrule and a nylon ring.

The special construction and threading of the metal ferrule allows internal screw connection with the metal conduit offering excellent resistance to traction and vibration.

The connection is complemented by the nylon ring which blocks the flexible conduit in place.

### Materiale Material

Raccordi filetto maschio girevole in ottone nichelato.

Revolving male fittings nickel plated brass.

### Compatibilità Suitable for

Per guaine tipo: NZ-DAN-SV-SVPEVA

For conduits type: NZ-DAN-SV-SVPEVA

QR CODE: istruzioni di montaggio  
QR CODE: assembly instructions



NMG Filetto GAS - Raccordi in ottone maschio girevole con continuità metallica per guaine flessibili nude

| Codice          | F<br>Filetto<br>GAS | Codice<br>Guaina<br>NW | Ø guaina<br>mm<br>int. est.  | A<br>mm | B<br>Passaggio utile<br>mm | L<br>mm | OD1<br>mm | OD2<br>mm | OD3<br>mm | SP1<br>mm | SP2<br>mm | SP3<br>mm | Confezione<br>standard |
|-----------------|---------------------|------------------------|------------------------------|---------|----------------------------|---------|-----------|-----------|-----------|-----------|-----------|-----------|------------------------|
| NMG10           | 1/4"                | 10                     | 10,0 - 13,0                  | 10      | 7                          | 40      | 17        | 23        | 25        | 15        | 20        | 22        | 20                     |
| NMG10A          | 3/8"                | 10                     | 10,0 - 13,0                  | 10      | 7                          | 40      | 22        | 23        | 25        | 19        | 20        | 22        | 20                     |
| NMG10B          | 1/2"                | 10                     | 10,0 - 13,0                  | 10      | 7                          | 40      | 27,5      | 23        | 25        | 24        | 20        | 22        | 20                     |
| NMG12           | 3/8"                | 12                     | 12,0 - 15,0                  | 10      | 10                         | 40      | 22        | 25        | 26        | 19        | 22        | 24        | 20                     |
| NMG12A          | 1/2"                | 12                     | 12,0 - 15,0                  | 10      | 10                         | 40      | 27,5      | 25        | 26        | 24        | 22        | 24        | 20                     |
| NMG13           | 3/8"                | 13                     | 13,0 - 16,0                  | 10      | 10                         | 40      | 22        | 27,5      | 29        | 19        | 24        | 26        | 20                     |
| NMG13A          | 1/2"                | 13                     | 13,0 - 16,0                  | 10      | 10                         | 40      | 27,5      | 27,5      | 29        | 24        | 24        | 26        | 20                     |
| NMG15           | 1/2"                | 15                     | 15,5 - 18,5                  | 10      | 10                         | 40      | 27,5      | 30        | 30,5      | 24        | 26        | 28        | 20                     |
| NMG18           | 3/4"                | 18                     | 18,0 - 21,5                  | 11      | 16,5                       | 44      | 34        | 32        | 33        | 30        | 28        | 30        | 10                     |
| NMG20           | 3/4"                | 20                     | 20,5 - 24,0                  | 11      | 18,1                       | 45      | 34        | 37        | 37        | 30        | 32        | 34        | 10                     |
| NMG27           | 1"                  | 27                     | 26,5 - 30,0                  | 15      | 24,5                       | 49      | 43,5      | 45        | 46,5      | 38        | 40        | 42        | 10                     |
| NMG35           | 1" 1/4              | 35                     | 35,0 - 39,5                  | 15      | 32,8                       | 60      | 49,5      | 55        | 58        | 45        | 50        | 53        | 5                      |
| NMG40           | 1" 1/2              | 40                     | 40,0 - 44,5                  | 18      | 37,5                       | 59,5    | 56        | 64        | 66,5      | 52        | 58        | 61        | 5                      |
| NMG50           | 2"                  | 50                     | 50,5 - 54,8                  | 18      | 47,8                       | 76      | 72        | 76        | 80,5      | 66        | 70        | 74        | 2                      |
| REF.<br>Part N. | F<br>GAS<br>Thread  | Conduit<br>code<br>NW  | int. ext.<br>Ø conduit<br>mm | A<br>mm | B<br>useful passage<br>mm  | L<br>mm | OD1<br>mm | OD2<br>mm | OD3<br>mm | SP1<br>mm | SP2<br>mm | SP3<br>mm | Packing<br>unit        |

NMG GAS Thread - Revolving male brass fittings for naked conduits with metallic continuity

## PER GUAINA METALLICHE NUDE - REVOLVING MALE FITTINGS FOR NAKED CONDUITS

## NMG Filetto ISO Metrico - Raccordo in ottone maschio girevole con continuità metallica per guaine flessibili nude

| Codice          | F<br>Filetto<br>ISO Metrico | Codice<br>Guaina<br>NW | Ø guaina<br>mm<br>int. est.  | A<br>mm | B<br>Passaggio utile<br>mm | L<br>mm | OD1<br>mm | OD2<br>mm | OD3<br>mm | SP1<br>mm | SP2<br>mm | SP3<br>mm | Confezione<br>standard |
|-----------------|-----------------------------|------------------------|------------------------------|---------|----------------------------|---------|-----------|-----------|-----------|-----------|-----------|-----------|------------------------|
| NMG10M12        | M 12x1,5                    | 10                     | 10,0 - 13,0                  | 9       | 7                          | 39      | 17        | 23        | 25        | 15        | 20        | 22        | 20                     |
| NMG10M16        | M 16x1,5                    | 10                     | 10,0 - 13,0                  | 10      | 7                          | 39      | 22        | 23        | 25        | 19        | 20        | 22        | 20                     |
| NMG10M20        | M 20x1,5                    | 10                     | 10,0 - 13,0                  | 9       | 7                          | 39      | 25        | 23        | 25        | 22        | 20        | 22        | 20                     |
| NMG12M16        | M 16x1,5                    | 12                     | 12,0 - 15,0                  | 10      | 9                          | 39      | 22        | 25        | 26        | 19        | 22        | 24        | 20                     |
| NMG12M20        | M 20x1,5                    | 12                     | 12,0 - 15,0                  | 10      | 9                          | 39,5    | 27,5      | 25        | 26        | 24        | 22        | 24        | 20                     |
| NMG13M16        | M 16x1,5                    | 13                     | 13,0 - 16,0                  | 10      | 10                         | 39,5    | 22        | 27,5      | 29        | 19        | 24        | 26        | 20                     |
| NMG13M20        | M 20x1,5                    | 13                     | 13,0 - 16,0                  | 10      | 10                         | 39,5    | 27,5      | 27,5      | 29        | 24        | 24        | 26        | 20                     |
| NMG15M20        | M 20x1,5                    | 15                     | 15,5 - 18,5                  | 9,5     | 10                         | 38      | 27,5      | 30        | 30,5      | 24        | 26        | 28        | 20                     |
| NMG18M25        | M 25x1,5                    | 18                     | 18,0 - 21,5                  | 10      | 16,5                       | 40      | 34,5      | 32        | 33        | 30        | 28        | 30        | 10                     |
| NMG20M25        | M 25x1,5                    | 20                     | 20,5 - 24,0                  | 9,5     | 18,1                       | 40      | 34,5      | 37        | 37        | 30        | 32        | 34        | 10                     |
| NMG27M32        | M 32x1,5                    | 27                     | 26,5 - 30,0                  | 13      | 24                         | 48      | 43,5      | 45        | 46,5      | 38        | 40        | 42        | 10                     |
| NMG35M40        | M 40x1,5                    | 35                     | 35,0 - 39,5                  | 20      | 32,8                       | 57,5    | 52        | 55        | 58        | 45        | 50        | 53        | 5                      |
| NMG40M50        | M 50x1,5                    | 40                     | 40,0 - 44,5                  | 20      | 37,5                       | 59,5    | 56        | 64        | 66,5      | 52        | 58        | 61        | 5                      |
| NMG50M63        | M 63x1,5                    | 50                     | 50,5 - 54,8                  | 24,5    | 47,8                       | 74      | 70        | 76        | 80,5      | 64        | 70        | 74        | 2                      |
| REF.<br>Part N. | F<br>ISO Metric<br>Thread   | Conduit<br>code<br>NW  | int. ext.<br>Ø conduit<br>mm | A<br>mm | B<br>useful<br>passage mm  | L<br>mm | OD1<br>mm | OD2<br>mm | OD3<br>mm | SP1<br>mm | SP2<br>mm | SP3<br>mm | Packing<br>unit        |

## NMG ISO Metric Thread - Revolving male brass fittings for naked conduits with metallic continuity

## NMG Filetto PG - Raccordo in ottone maschio girevole con continuità metallica per guaine flessibili nude

| Codice          | F<br>Filetto<br>PG | Codice<br>Guaina<br>NW | Ø guaina<br>mm<br>int. est.  | A<br>mm | B<br>Passaggio utile<br>mm | L<br>mm | OD1<br>mm | OD2<br>mm | OD3<br>mm | SP1<br>mm | SP2<br>mm | SP3<br>mm | Confezione<br>standard |
|-----------------|--------------------|------------------------|------------------------------|---------|----------------------------|---------|-----------|-----------|-----------|-----------|-----------|-----------|------------------------|
| NMG1009         | 9                  | 10                     | 10,0 - 13,0                  | 7       | 7                          | 37,5    | 19,5      | 23        | 25        | 17        | 20        | 22        | 20                     |
| NMG1011         | 11                 | 10                     | 10,0 - 13,0                  | 7,5     | 7                          | 35,5    | 23        | 23        | 25        | 20        | 20        | 22        | 20                     |
| NMG1013         | 13,5               | 10                     | 10,0 - 13,0                  | 7,5     | 7                          | 37      | 25        | 23        | 25        | 22        | 20        | 22        | 20                     |
| NMG1209         | 9                  | 12                     | 12,0 - 15,0                  | 8       | 7                          | 37      | 19,5      | 25        | 26        | 19        | 22        | 24        | 20                     |
| NMG1211         | 11                 | 12                     | 12,0 - 15,0                  | 7,5     | 10                         | 39      | 23        | 25        | 26        | 20        | 22        | 24        | 20                     |
| NMG1213         | 13,5               | 12                     | 12,0 - 15,0                  | 7,5     | 10                         | 37,5    | 25        | 25        | 26        | 22        | 22        | 24        | 20                     |
| NMG1311         | 11                 | 13                     | 13,0 - 16,0                  | 7,5     | 10                         | 37,5    | 23        | 27,5      | 29        | 20        | 24        | 26        | 20                     |
| NMG1313         | 13,5               | 13                     | 13,0 - 16,0                  | 7,5     | 10                         | 37      | 25        | 27,5      | 29        | 22        | 24        | 26        | 20                     |
| NMG1316         | 16                 | 13                     | 13,0 - 16,0                  | 7       | 10                         | 37      | 27,5      | 27,5      | 29        | 24        | 24        | 26        | 20                     |
| NMG1513         | 13,5               | 15                     | 15,5 - 18,5                  | 7,5     | 10                         | 37      | 25        | 30        | 30,5      | 22        | 26        | 28        | 20                     |
| NMG1516         | 16                 | 15                     | 15,5 - 18,5                  | 7       | 10                         | 37      | 27,5      | 30        | 30,5      | 24        | 26        | 28        | 20                     |
| NMG1816         | 16                 | 18                     | 18,0 - 21,5                  | 9       | 15                         | 39,5    | 27,5      | 32        | 33        | 24        | 28        | 30        | 10                     |
| NMG2021         | 21                 | 20                     | 20,5 - 24,0                  | 9       | 18,1                       | 40      | 34        | 37        | 37        | 30        | 32        | 34        | 10                     |
| NMG2729         | 29                 | 27                     | 26,5 - 30,0                  | 12      | 24                         | 48      | 43,5      | 46        | 46        | 38        | 40        | 42        | 10                     |
| NMG3536         | 36                 | 35                     | 35,0 - 39,5                  | 20      | 32,8                       | 59      | 56        | 55        | 58        | 52        | 50        | 53        | 5                      |
| NMG4036         | 36                 | 40                     | 40,0 - 44,5                  | 20      | 37,7                       | 59,5    | 56        | 64        | 66,5      | 52        | 58        | 61        | 5                      |
| NMG4042         | 42                 | 40                     | 40,0 - 44,5                  | 20      | 37,7                       | 59,5    | 63        | 64        | 66,5      | 58        | 58        | 61        | 5                      |
| NMG5048         | 48                 | 50                     | 50,5 - 54,8                  | 25      | 47,8                       | 76      | 72        | 76        | 80,5      | 66        | 70        | 74        | 2                      |
| REF.<br>Part N. | F<br>PG<br>Thread  | Conduit<br>code<br>NW  | int. ext.<br>Ø conduit<br>mm | A<br>mm | B<br>useful<br>passage mm  | L<br>mm | OD1<br>mm | OD2<br>mm | OD3<br>mm | SP1<br>mm | SP2<br>mm | SP3<br>mm | Packing<br>unit        |

## NMG PG Thread - Revolving male brass fittings for naked conduits with metallic continuity