

LINEAR

6012

Apparecchio led lineare da interni con installazione ad incasso. Corpo in estruso di alluminio verniciato con polveri epossipoliesteri di colore bianco o antracite, antingiallente con finitura gofrata fine con pretrattamento di fosfatazione e sgrassaggio. Tappi di chiusura in policarbonato stampato colore bianco. Driver elettronico 220-240V 50/60Hz. Prodotto costruito in conformità alle vigenti norme EN / IEC 60598-1.

Led indoor linear spotlight for recessed installation. Extruded aluminum body painted with white or anthracite epoxy-polyester powders, anti-yellowing with fine embossed finish with pre-treatment of phosphating and degreasing. end caps in white printed polycarbonate. Electronic driver 220-240V 50/60 Hz. Manufactured in accordance with EN / IEC 60598-1.

CARATTERISTICHE / MAIN FEATURES

	Classe II Class II		CRI >80 CRI >90		EN / IEC 60598-1
	Incasso Recessed		Mac Adams 3		RG0/RG1
			UGR <22 UGR <19		L80-B50 >100.000h L90-B10 >60.000h
			IK 07		7 YEARS WARRANTY
			IP 20 IP 40		
			○ Bianco opaco / Matt white ● Antracite / Anthracite		

CODIFICA CODICE / CODING

Art.	+	Mod.	+	°K (CRI)	+	W. tot.	+	Options	○ Bianco opaco	Options	● Antracite
6012		R3		27 = 2700°K (CRI >80)		03		BL	= on/off	NL	= on/off
		RP		30 = 3000°K (CRI >80)		06		BD	= dali 2 / dali 2 push	ND	= dali 2 / dali 2 push
				40 = 4000°K (CRI >80)		09		BC	= casambi	NC	= casambi
				94 = 4000°K (CRI >90)		12					
						15					
						18					

Δ LUMEN

	°K	CRI	% Lm
27	2700	> 80	-8.10%
30	3000	> 80	-5.15%
40	4000	> 80	standard
94	4000	> 90	-15.08%

DOTAZIONE / STANDARD EQUIPMENT



- Driver IP20 elettronico incluso.

- IP20 electronic driver..



LINEAR

mod.R3

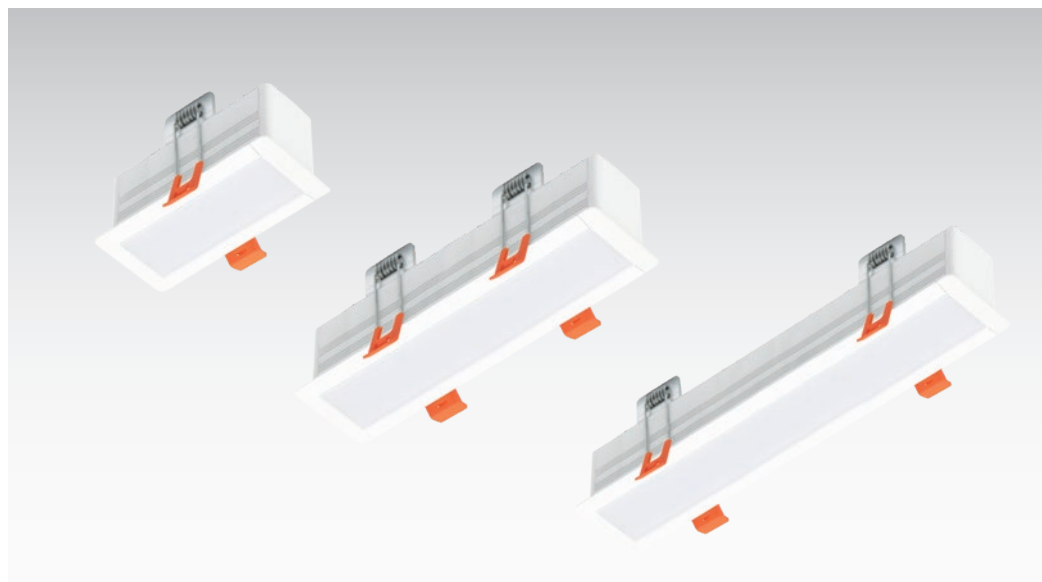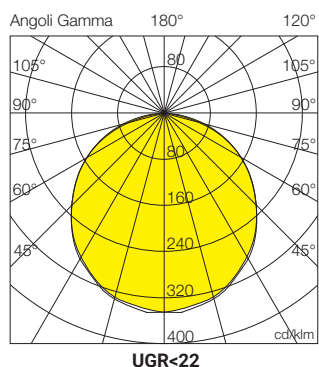

Ottica

Diffusore in policarbonato opale liscio antiabbagliamento e antiriflesso.


Optic

Anti-glare smooth opal polycarbonate diffuser.


DIMENSIONI / DIMENSIONS

FORO INCASSO / HOLE

	A (mm)	B (mm)	C (mm)	Kg
D1	45	60	90	0,24
D2	45	60	160	0,32
D3	45	60	230	0,4
D4	45	60	300	0,48
D5	45	60	370	0,56
D6	45	60	460	0,66



	A1	B1
D1	35	85
D2	35	150
D3	35	220
D4	35	290
D5	35	360
D6	35	450



ESEMPIO CODIFICA CODICE 4000K - CRI>80 - ON/OFF

E.G. ARTICLE REFERENCE 4000K - CRI>80 - ON/OFF


PRESTAZIONI / PERFORMANCE

Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
6012R34003BL	3	4000K - CRI>80	374	125	D1	○
6012R34006BL	6	4000K - CRI>80	747	125	D2	○
6012R34009BL	9	4000K - CRI>80	1121	125	D3	○
6012R34012BL	12	4000K - CRI>80	1495	125	D4	○
6012R34015BL	15	4000K - CRI>80	1868	125	D5	○
6012R34018BL	18	4000K - CRI>80	2242	125	D6	○


Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
6012R34003NL	3	4000K - CRI>80	374	125	D1	●
6012R34006NL	6	4000K - CRI>80	747	125	D2	●
6012R34009NL	9	4000K - CRI>80	1121	125	D3	●
6012R34012NL	12	4000K - CRI>80	1495	125	D4	●
6012R34015NL	15	4000K - CRI>80	1868	125	D5	●
6012R34018NL	18	4000K - CRI>80	2242	125	D6	●

LINEAR

mod.RP



UGR<19

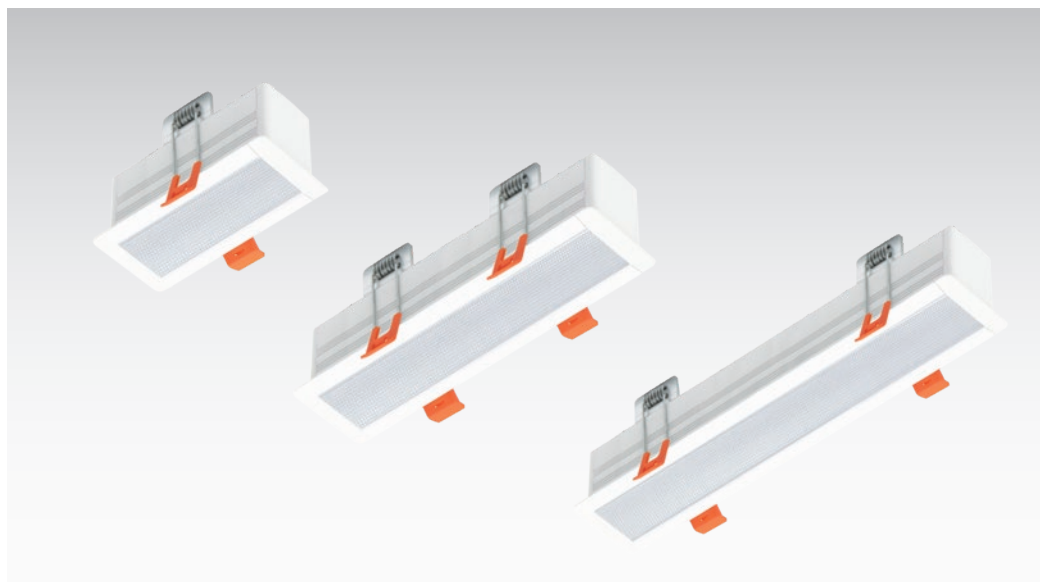

Ottica

DDiffusore policarbonato microprismatico antiabbagliamento e antiriflesso.


Optic

Anti-glare microprismatic polycarbonate diffuser.


DIMENSIONI / DIMENSIONS

FORO INCASSO / HOLE

	A (mm)	B (mm)	C (mm)	Kg
D1	45	60	90	0,24
D2	45	60	160	0,32
D3	45	60	230	0,4
D4	45	60	300	0,48
D5	45	60	370	0,56
D6	45	60	460	0,66



	A1	B1
D1	35	85
D2	35	150
D3	35	220
D4	35	290
D5	35	360
D6	35	450



ESEMPIO CODIFICA CODICE 4000K - CRI>80 - ON/OFF

E.G. ARTICLE REFERENCE 4000K - CRI>80 - ON/OFF

PRESTAZIONI / PERFORMANCE

Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
6012RP4003BL	3	4000K - CRI>80	456	117	D1	○
6012RP4006BL	6	4000K - CRI>80	911	117	D2	○
6012RP4009BL	9	4000K - CRI>80	1367	117	D3	○
6012RP4012BL	12	4000K - CRI>80	1823	117	D4	○
6012RP4015BL	15	4000K - CRI>80	2278	117	D5	○
6012RP4018BL	18	4000K - CRI>80	2734	117	D6	○

Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
6012RP4003NL	3	4000K - CRI>80	456	117	D1	●
6012RP4006NL	6	4000K - CRI>80	911	117	D2	●
6012RP4009NL	9	4000K - CRI>80	1367	117	D3	●
6012RP4012NL	12	4000K - CRI>80	1823	117	D4	●
6012RP4015NL	15	4000K - CRI>80	2278	117	D5	●
6012RP4018NL	18	4000K - CRI>80	2734	117	D6	●