


RING

6024

Apparecchio led da interni con installazione ad incasso. Anello in lamiera d'acciaio verniciata con polveri epossipoliestere di colore bianco o nero, antingiallente con finitura goffrata fine e corpo in alluminio tornito tranciato verniciato con polveri epossipoliestere di colore nero (pretrattamento di fosfatazione e sgrassaggio). Driver elettronico 220-240V 50/60Hz. Prodotto costruito in conformità alle vigenti norme EN / IEC 60598-1. I

Led indoor spotlight for recessed installation. Ring in steel sheet painted with white or black epoxy-polyester powders, anti-yellowing with fine embossed finish and body in sheared turned aluminum painted with black epoxy-polyester powders (pre-treatment of phosphating and degreasing). Electronic driver 220-240V 50/60 Hz. Manufactured in accordance with EN / IEC 60598-1.

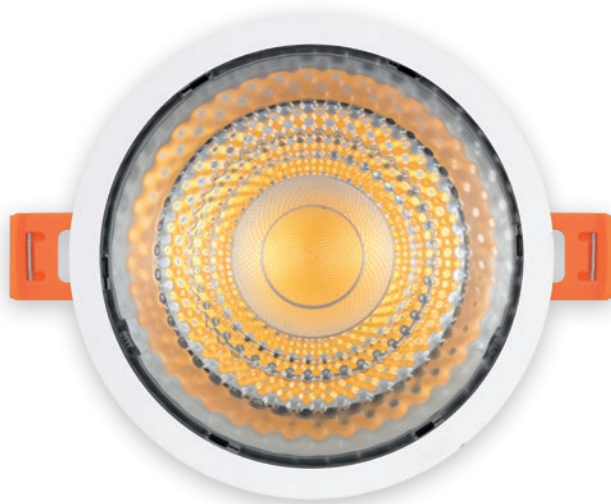

CARATTERISTICHE / MAIN FEATURES

- 

Classe II
Class II
- 

CRI >80
CRI >90
- 

EN / IEC
60598-1
- 

Incasso
Recessed
- 

Mac Adams 3
- 

RG0/RG1
- 

UGR <19
- 

L90-B10 > 100.000 h
- 

IK 07
- 

7 YEARS
WARRANTY
- 

IP 20
IP 44
- 

○ Bianco opaco / Matt white
● Nero opaco / Matt black
- 

100% rigenerabile
100% regenerable

CODIFICA CODICE / CODING

Art.	+	Mod.	+	°K (CRI)	+	W. tot.	+	Options	○ Bianco opaco	Options	● Nero opaco
6024		RS		27	= 2700°K (CRI >80)	06		BL	= on/off	NL	= on/off
		RF		30	= 3000°K (CRI >80)	10		BD	= dali 2 / dali 2 push	ND	= dali 2 / dali 2 push
				40	= 4000°K (CRI >80)	15		BC	= casambi	NC	= casambi
				97	= 2700°K (CRI >90)	25					
				93	= 3000°K (CRI >90)						
				94	= 4000°K (CRI >90)						

Δ LUMEN

	°K	CRI	% Lm
27	2700	> 80	-7.64%
30	3000	> 80	-3.02%
40	4000	> 80	standard
97	2700	> 90	-22.45%
93	3000	> 90	-18.25%
94	4000	> 90	-14.30%


DOTAZIONE / STANDARD EQUIPMENT

- Driver IP20 elettronico incluso - IP20 electronic driver.



RING

mod.RS

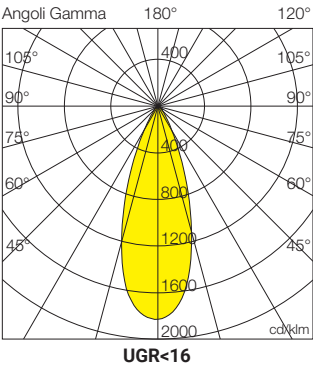

Ottica
Lente spot 36° antiabbagliamento e antiriflesso in PMMA ad alto rendimento di flusso.

Optic
36° spot anti-glare lens in PMMA with high flux efficiency.

DIMENSIONI / DIMENSIONS

FORO INCASSO / HOLE

	A (mm)	B (mm)	C (mm)	Kg		
D1	55	-	65	0,20		
D2	65	-	60	0,30		
D3	86	-	70	0,40		
D4	130	-	80	0,80		

ESEMPIO CODIFICA CODICE 4000K - CRI>80 - ON/OFF
E.G. ARTICLE REFERENCE 4000K - CRI>80 - ON/OFF


PRESTAZIONI / PERFORMANCE

Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
6024RS4006BL	6	4000K - CRI>80	553	92	D1	○
6024RS4010BL	10	4000K - CRI>80	1104	110	D2	○
6024RS4015BL	15	4000K - CRI>80	1713	114	D3	○
6024RS4025BL	25	4000K - CRI>80	2638	106	D4	○

Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
6024RS4006NL	6	4000K - CRI>80	553	92	D1	●
6024RS4010NL	10	4000K - CRI>80	1104	110	D2	●
6024RS4015NL	15	4000K - CRI>80	1713	114	D3	●
6024RS4025NL	25	4000K - CRI>80	2638	106	D4	●

RING

mod.RF

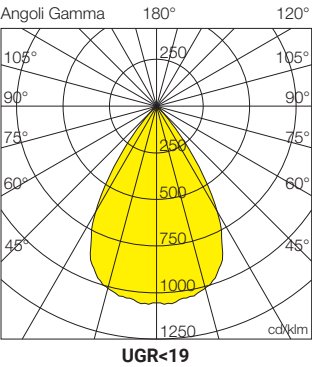

Ottica
Lente wide flood 60° antiabbagliamento e antiriflesso in PMMA ad alto rendimento di flusso.

Optic
60° wide flood anti-glare lens in PMMA with high flux efficiency.

DIMENSIONI / DIMENSIONS

FORO INCASSO / HOLE

	A (mm)	B (mm)	C (mm)	Kg			Ø	
D1	55	-	65	0,20			50	
D2	65	-	60	0,30			60	
D3	86	-	70	0,40			80	
D4	130	-	80	0,80			125	

ESEMPIO CODIFICA CODICE 4000K - CRI>80 - ON/OFF E.G. ARTICLE REFERENCE 4000K - CRI>80 - ON/OFF

PRESTAZIONI / PERFORMANCE

Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
6024RF4006BL	6	4000K - CRI>80	528	88	D1	○
6024RF4010BL	10	4000K - CRI>80	1055	105	D2	○
6024RF4015BL	15	4000K - CRI>80	1637	109	D3	○
6024RF4025BL	25	4000K - CRI>80	2522	101	D4	○

Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
6024RF4006NL	6	4000K - CRI>80	528	88	D1	●
6024RF4010NL	10	4000K - CRI>80	1055	105	D2	●
6024RF4015NL	15	4000K - CRI>80	1637	109	D3	●
6024RF4025NL	25	4000K - CRI>80	2522	101	D4	●