

Apparecchio led da interni con installazione ad incasso. Anello in lamiera d'acciaio verniciata con polveri epossipoliesteri di colore bianco o nero, antingiallente con finitura goffrata fine e corpo in alluminio tornito tranciato verniciato con polveri epossipoliesteri di colore nero (pretrattamento di fosfatazione e sgrassaggio). Driver elettronico 220-240V 50/60Hz. Prodotto costruito in conformità alle vigenti norme EN / IEC 60598-1. I

Led indoor spotlight for recessed installation. Ring in steel sheet painted with white or black epoxy-polyester powders, anti-yellowing with fine embossed finish and body in sheared turned aluminum painted with black epoxy-polyester powders (pre-treatment of phosphating and degreasing). Electronic driver 220-240V 50/60 Hz. Manufactured in accordance with EN / IEC 60598-1.



CARATTERISTICHE / MAIN FEATURES

	Classe II Class II		CRI >80 CRI >90		EN / IEC 60598-1
	Incasso Recessed		Mac Adams 3		RG0/RG1
			UGR <19		L90-B10 > 100.000 h
			IK 07		7 YEARS WARRANTY
			IP 20		
			○ Bianco opaco / Matt white ● Nero opaco / Matt black		
			100% rigenerabile 100% regenerable		

CODIFICA CODICE / CODING

Art.	+	Mod.	+	°K (CRI)	+	W. tot.	+	Options	○ Bianco opaco	Options	● Nero opaco
6025		RS		27	= 2700°K (CRI >80)	06		BL	= on/off	NL	= on/off
		RF		30	= 3000°K (CRI >80)	10		BD	= dali 2 / dali 2 push	ND	= dali 2 / dali 2 push
				40	= 4000°K (CRI >80)			BC	= casambi	NC	= casambi
				97	= 2700°K (CRI >90)						
				93	= 3000°K (CRI >90)						
				94	= 4000°K (CRI >90)						

Δ LUMEN

	°K	CRI	% Lm
27	2700	> 80	-7.64%
30	3000	> 80	-3.02%
40	4000	> 80	standard
97	2700	> 90	-22.45%
93	3000	> 90	-18.25%
94	4000	> 90	-14.30%


DOTAZIONE / STANDARD EQUIPMENT

- Driver IP20 elettronico incluso - IP20 electronic driver.



EDU

mod.RS

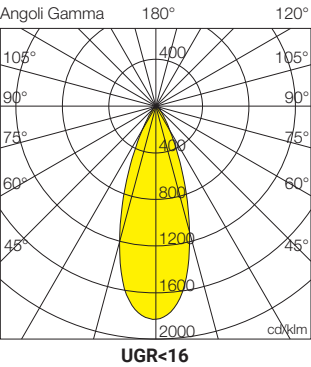

Ottica
 Riflettore spot 36° antiabbagliamento e antiriflesso in PMMA ad alto rendimento di flusso.

Optic
 36° spot anti-glare reflector in PMMA with high flux efficiency.

DIMENSIONI / DIMENSIONS

FORO INCASSO / HOLE

	A (mm)	B (mm)	C (mm)	Kg			Ø	
D1	75	-	73	0,20			D1	60

ESEMPIO CODIFICA CODICE 4000K - CRI>80 - ON/OFF
 E.G. ARTICLE REFERENCE 4000K - CRI>80 - ON/OFF


PRESTAZIONI / PERFORMANCE

Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
6025RS4006BL	6	4000K - CRI>80	723	121	D1	○
6025RS4010BL	10	4000K - CRI>80	1266	127	D1	○

Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
6025RS4006NL	6	4000K - CRI>80	723	121	D1	●
6025RS4010NL	10	4000K - CRI>80	1266	127	D1	●

EDU

mod.RF

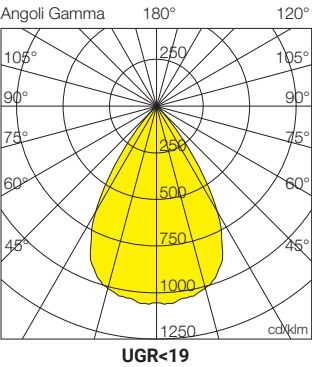

Ottica
 Riflettore wide flood 60° antiabbagliamento e antiriflesso in PMMA ad alto rendimento di flusso.

Optic
 60° wide flood anti-glare reflector in PMMA with high flux efficiency.

DIMENSIONI / DIMENSIONS

FORO INCASSO / HOLE

	A (mm)	B (mm)	C (mm)	Kg		Ø	
D1	75	-	73	0,20		D1	60

ESEMPIO CODIFICA CODICE 4000K - CRI>80 - ON/OFF
 E.G. ARTICLE REFERENCE 4000K - CRI>80 - ON/OFF

PRESTAZIONI / PERFORMANCE

Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
6025RF4006BL	6	4000K - CRI>80	695	116	D1	○
6025RF4010BL	10	4000K - CRI>80	1217	122	D1	○

Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
6025RF4006NL	6	4000K - CRI>80	695	116	D1	●
6025RF4010NL	10	4000K - CRI>80	1217	122	D1	●