


Product Datasheet

BOC3010

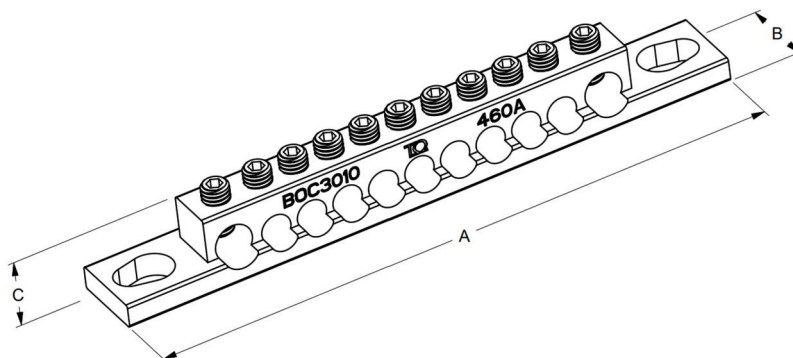

Main

Family	Accessories for busbars
Version	Universal distribution block 11 outputs 460A
Code	BOC3010
Reference	BOC-11X-460
Number per package	10
Weight (kg)	0.1

Code	IN/OUT	Nr	Ø (mm)	Stripped cable sect. (mm ²)	Cable with ferrule sect. (mm ²)	Grub Screw Hex socket
BOC3010	← OUT	9	5,7	1 ÷ 10	1 ÷ 10	M5
	← OUT	2	7,2	1,5 ÷ 16	1,5 ÷ 16	M5

Suggested torque values for most common cable sections:

1 ÷ 1.5 mm²: 0.5 Nm

2.5 mm²: 0.8 Nm

4 ÷ 6 mm²: 1 Nm

10 mm²: 2 Nm

16 mm²: 4 Nm

Technical Features

Body Material: Brass CuZn39Pb3

Grub screw Material: white passivated galvanized steel


Current: max 460 A

Grub screw hexagonal socket flat point included

Product suitable for uses within scope of IEC 61439-1 and 61439-2 (Routine test IEC 61439 under responsibility of Assembly Manufacturer)

Compatible, for example, with threaded copper busbar:

- M5 x pitch 18 mm
- M6 x pitch 17,5 mm
- M6 x pitch 25 mm
- M8 x pitch 20 mm
- M8 x pitch 25 mm

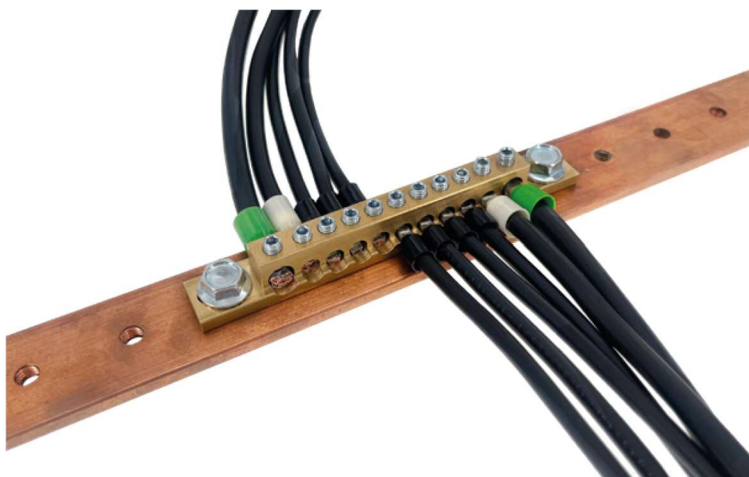

Please contact Teknomega for non-specified tolerances.