


Product Datasheet

FLT1040

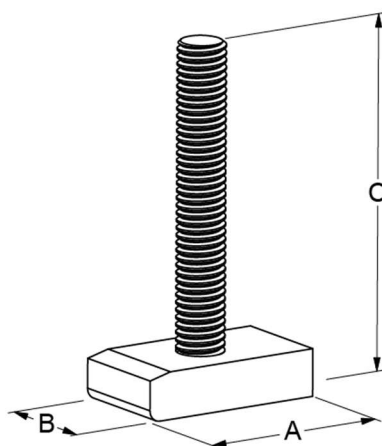

Main

Family	Bar supports
Version	Hammer head screw
Code	FLT1040
Reference	FLT-KIT-TB
Number per package	25
A (mm)	32
B (mm)	18
C (mm)	60

Technical Features

Material: galvanized steel, class 8.8

Thread sizes: M8 L=52mm

Depending on the total thickness of the conductor to be supported (including any insulation, such as for COFLEX & J-LINK), it may be necessary to add the accessory kits below in order to ensure optimal tightening. See accessories selection table below.

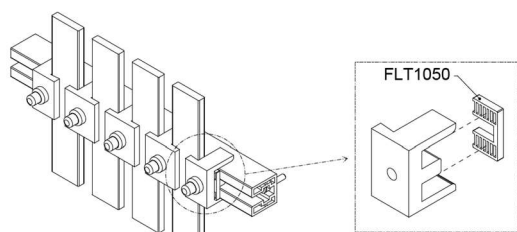


Figure 1

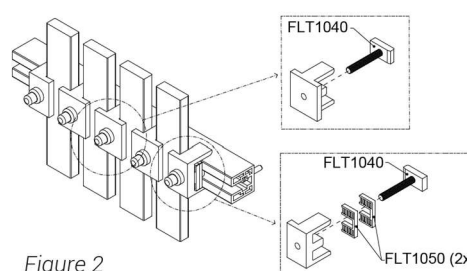


Figure 2

Conductor to be supported		Accessory	Tightening torque
RIGID BAR	Thickness up to 5mm	Not required	10 Nm
	Thickness from 5 mm to 10 mm	FLT1050 (see figure 1) (1 spacer for each "L" block)	15 Nm
COFLEX	Up to 6 laminates of 0,5 mm Up to 4 laminates of 0,8 mm Up to 4 laminates of 1 mm	Not required	10 Nm
	10 laminates of 0,5 mm 6 to 10 laminates of 0,8 mm 5 to 8 laminates of 1 mm	FLT1050 (see figure 1) (1 spacer for each "L" block)	12 Nm
	10 to 12 laminates of 1 mm	FLT1040 + FLT1050 (see figure 2) (1 long hammer head screw for each "L" and "T" block and 2 spacers for each "L" block)	15 Nm
J-LINK	25 mm ² - 35 mm ²	Not required	10 Nm
	50 mm ² - 85 mm ²	FLT1050 (see figure 1) (1 spacer for each "L" block)	15 Nm
	120 mm ²		18 Nm
	240 mm ²	FLT1040 + FLT1050 (see figure 2) (1 long hammer head screw for each "L" and "T" block and 2 spacers for each "L" block)	20 Nm



Please contact Teknomega for non-specified tolerances.