


Product Datasheet

CPH2115

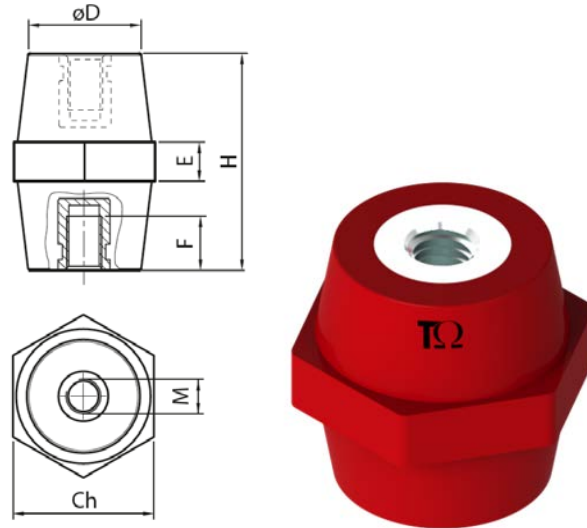

Main

Family	Low voltage insulators	
Version	Insulators in polyester	
Code	CPH2115	
Reference	CPH 100M12	
Number per package	2	
Weight (kg)	0.535	
Dimensions (mm)	H=100 Ch=65 D=52 E=18 F=25	
Type	Hexagonal	
Thread Size	M12	
Force Characteristics	Tightening torque*	85 Nm
	Tensile strength	20 kN
	Compressive strength	>200 kN
	Flexural strength	9 kN

*Maximum tightening torque value suggested for 8.8 class screws

Technical Characteristics

Insulation

Thermosetting polyester reinforced with fiberglass

Self-extinguishing: UL94-V0

Color: red RAL 3031


Threaded Inserts

Galvanized steel

Finished product

Rated voltage: 1000 V AC/1500 V DC

Working temperature: $-40 \div 130\text{ }^{\circ}\text{C}$

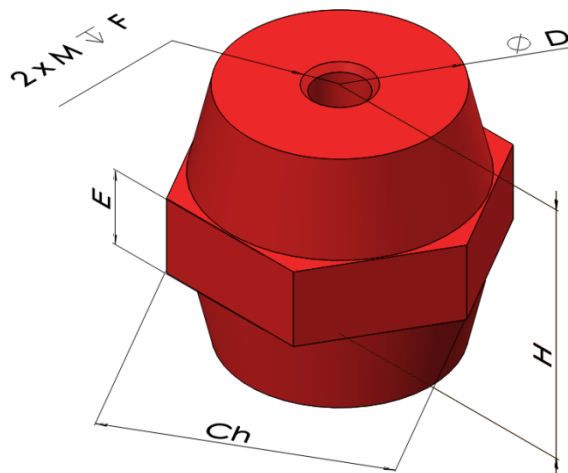

Please contact Teknomega for non-specified tolerances