


Product Datasheet

CPH2525

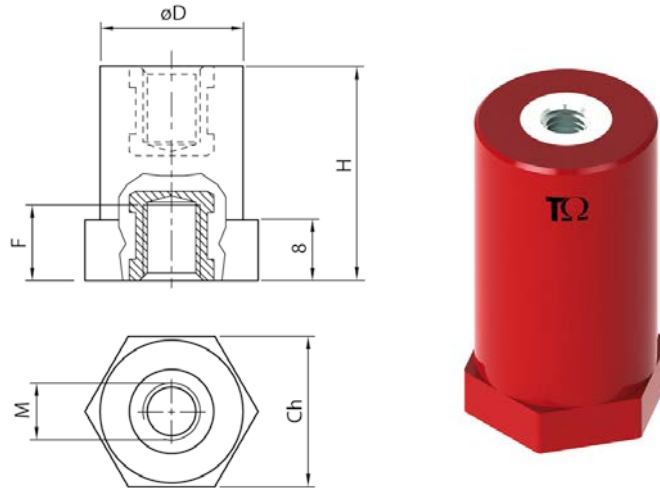

Main

Family	Low voltage insulators	
Version	Spacing columns in polyester	
Code	CPH2525	
Reference	CLH 20M6-20	
Number per package	25	
Weight (Kg)	0.018	
Dimensions (mm)	H=20 Ch=21 D=20 F=6	
Type	Hexagonal	
Thread Size	M6	
Force Characteristics	Tightening torque*	8 Nm
	Tensile strength	2.8 kN
	Compressive strength	22 kN
	Flexural strength	1.7 kN

*Maximum tightening torque value suggested for 8.8 class screws

Technical Features

Insulation

Thermosetting Polyester reinforced with fiberglass

Self-extinguishing: UL 94-V0

Color: Red RAL 3031


Threaded Inserts

Galvanized steel

Finished product

Rated voltage: 1000 V AC/1500 V DC

Working temperature: -40 to 130 °C

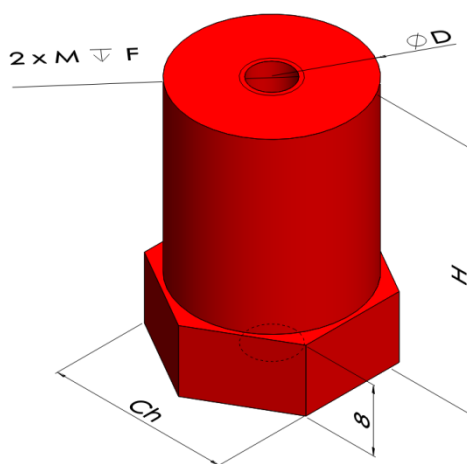

Please contact Teknomega for non-specified tolerances.