


Product Datasheet

GPG2034

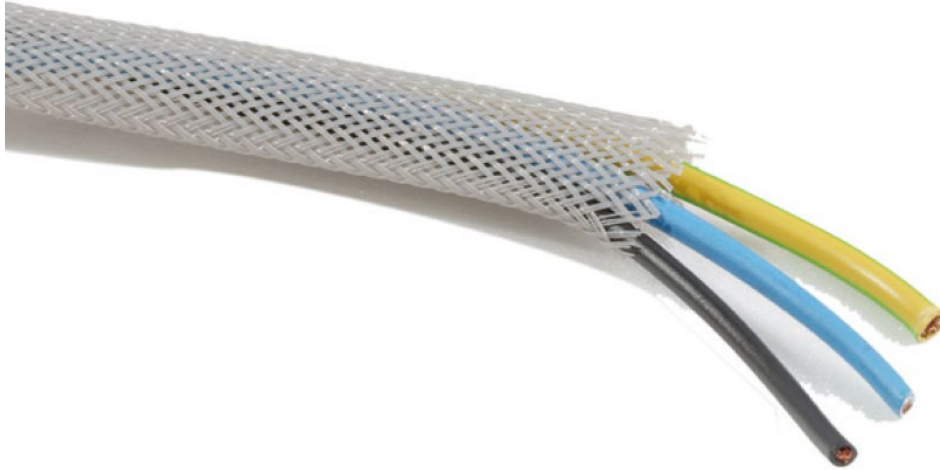

Main

Family	Wiring sleeves
Version	Polyester braided sleeve UL 94-V2 – Grey color
Code	GPG2034
Reference	GPG 35G
Length (m)	50
Flat width (mm)	35
Ø min (mm)	30
Ø max (mm)	60

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Technical Features

Color: Grey

Compliant with RoHS

Halogen-free polyester (PET) monofilament

Diameter 0.22 mm

Density: 1.14 kg/dm³

Working temperature: -40 °C to +150 °C

Melting temperature: 230± 5°C

Self-extinguishing: UL 94-V2

Packaging: coil in cardboard box self-reeling from the center

THE RANGE - APPLICATIONS AND ADVANTAGES

- made of braided polyester monofilament to form a tubular structure
- for all electric cable wiring applications
- high expandibility value
- limited number of references
- excellent resistance to abrasion and to chemical agents
- excellent mechanical protection of conductors
- halogen-free
- can be cut with UTG tools

Please contact Teknomega for non-specified tolerances.