


Product Datasheet

GWF1025

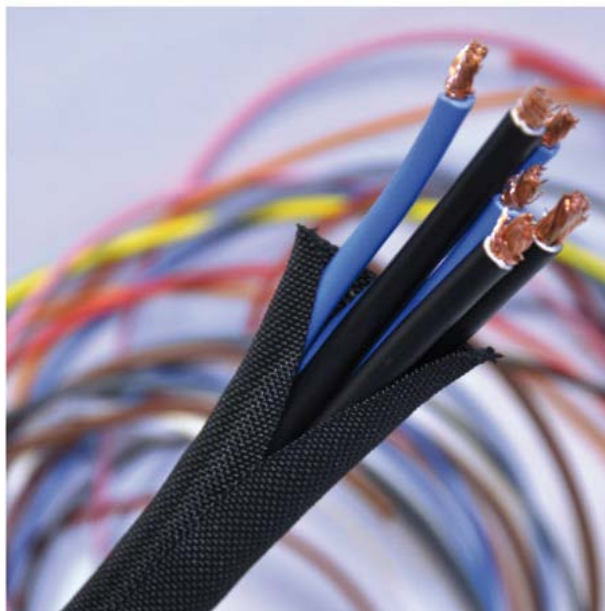

Main

Family	Wiring sleeves
Version	WRAPFLEX self-closing polyester sleeve UL 94-V0
Code	GWF1025
Reference	GWF 38
Length (m)	15
Flat width (mm)	180
Ø max (mm)	38

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Technical Features

Black color

Compliant with RoHS

Halogen-free polyester (PET) monofilament + multifilament

Density: 1.38 kg/dm³

Working temperature: - 40°C + 125°C

Melting temperature: 250± 5 °C


Self-extinguishing: UL 94-V0

Self-closing

Packaging: coil in cardboard box

THE RANGE - APPLICATIONS AND ADVANTAGES

- made of braided polyester monofilament + multifilament
- openable sleeve with "memory effect" for immediate closing back
- allows covering already wired cable bundles
- excellent resistance to abrasion and to chemical agents
- GWF sleeve is made of self-extinguishing material UL 94-V0
- GWF sleeves can be cut with the UTG tools

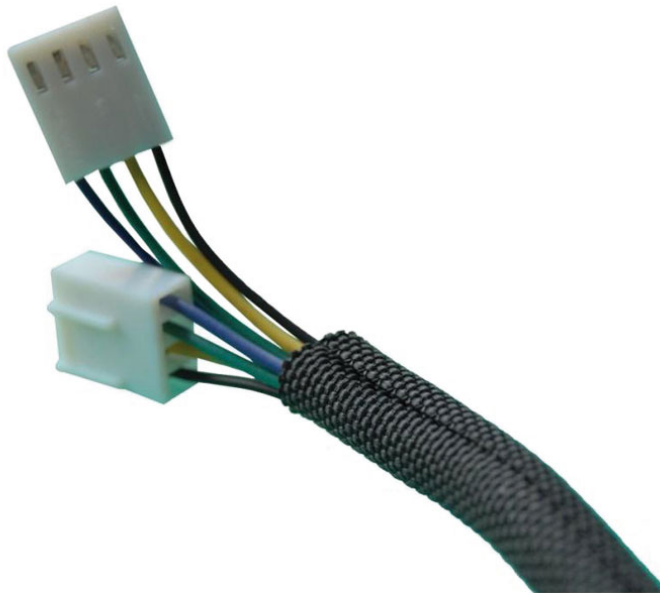

Please contact Teknomega for non-specified tolerances.