
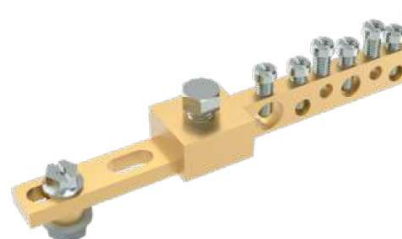


Product Datasheet

MRS5002

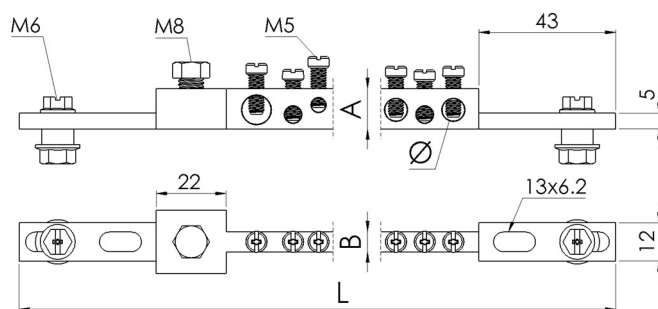

Main

Family	Earthing and Neutral Terminals
Version	Earthing terminals with connections for housing
Code	MRS5002
Reference	MRS 13-6-41
Number per package	1
Weight (kg)	0.350
L (mm)	462
A (mm)	13
B (mm)	6
Rated current (A)	80

Holes

Ø (mm)	n° holes	Stripped wire (mm ²)	Wire with ferrule (mm ²)	Torque (Nm)
9.1	1	16 ÷ 35	10 ÷ 35	2
7.0	7	4 ÷ 16	2.5 ÷ 16	2
5.3	19	2.5 ÷ 6	1.5 ÷ 6	1.5
4.5	14	1.5 ÷ 4	0.75 ÷ 4	1.5

Technical Features


Material: Brass, electrical conductivity 27% IACS

Connection with cable lug up to 95 mm²


Universal fixing with 2 eyelet holes: direct fixing on structure, fixing on copper bars, fixing on spacers and extension 2 connectors.

Complete with M6 fixing screws, M8 screws for eyelet terminals M5 connection screws in galvanized steel.

Rated current: 80 A

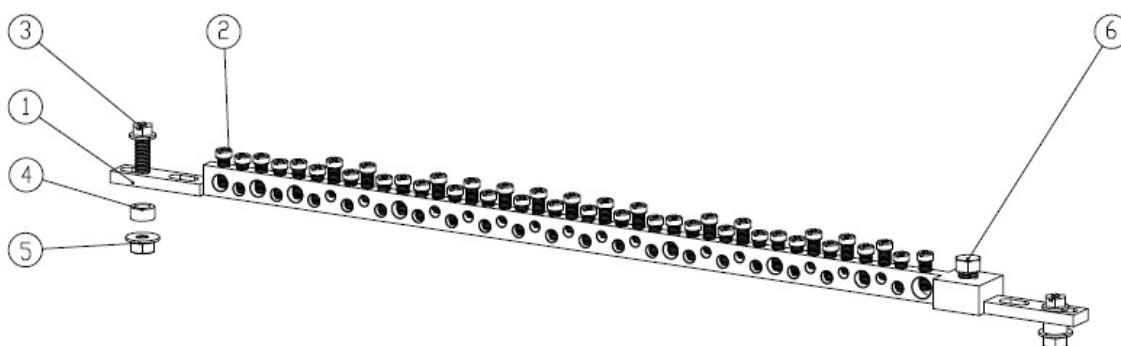

Position	Description	No.
1	Brass bar 41 holes	1
2	PH with slot head screw M5X12.5	41
3	Hexagon flange screw M6X16	2
4	Sleeve bushing M6	2
5	Hexagon flange nut M6	2
6	Hexagon screw SW10 M8X16	1

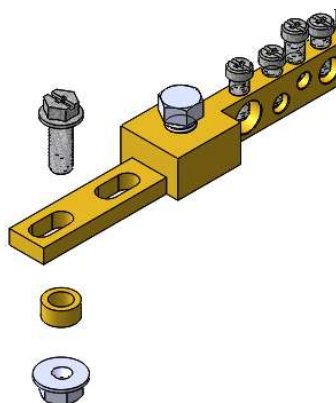

Please contact Teknomega for non-specified tolerances.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications