


## Product Datasheet

### TOP1052

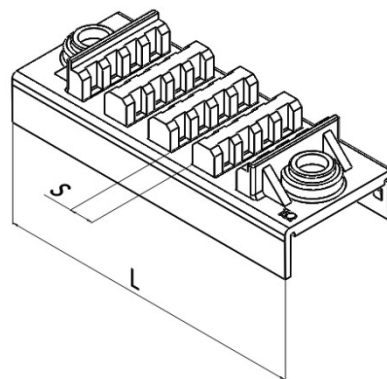

#### Main

Family	Bar supports
Version	Blocks and screw set TOP 4/10
Code	TOP1052
Reference	TOP 4/10T
Number per package	1
Type	T
No. of blocks	6
No. of tie-rods	6
No. of bars	1 ÷ 4
s (mm)	10
bar min-max H (mm)	30-120
L (mm)	125

## Technical Features

Rated Voltage: 1000 V AC / 1500 V DC

Adjustable distance between phases

Exceptional resistance to short-circuits

Bar thickness 10 mm

Max working temperature: 125 °C

The TOP1052 and TOP1053 kits also included PA12 tubes for M8 tie-rod insulation



## Insulating blocks

Made in PA6,6 reinforced 35% Fiberglass


Self-extinguishing UL94-V0

Color: black



## Certifications

- Compliant with standard IEC 61439-2
- $\Omega$  TOP was tested in ACAE laboratory IA01 on electrical and mechanical resistance properties
- CERTIFICATES ACAE-LOVAG No.:
  - 15.001 - A 15.002 - A015.003

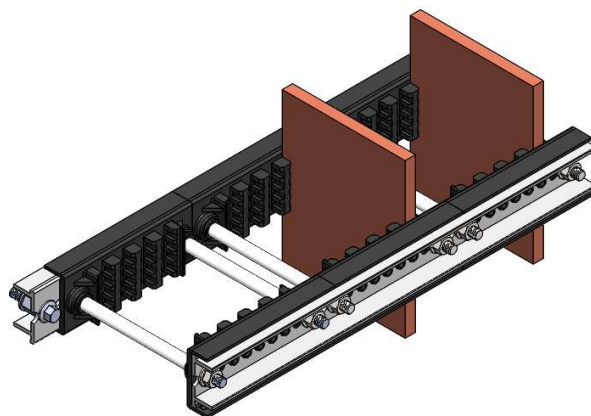

Please contact Teknomena for non-specified tolerances.