


# **Product Datasheet**




# **TOP1060**

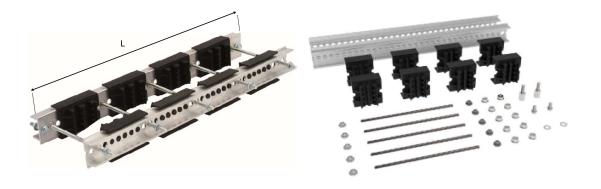

### Main

Family	Bar supports
Version	Pre-assembled bar supports
Code	TOP1060
Reference	TOP 2/5TN-400
Number per package	1
Туре	T+N
L (mm)	400

This set is made of insulating blocks for  $\underline{5}$  mm thick bars and is made of all the screws and tie-rods needed to make  $\underline{T+N}$  (3-pole + neutral) configured bar support.

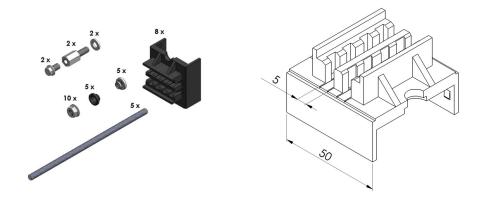

TOP1010

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications



### **Technical Features**

Rated Voltage: 1000 V AC / 1500 V DC

Max working temperature: 125 °C

Support profile: see TOP1000

## **Insulating blocks**

Made in PA6,6 reinforced 35% Fiberglass Self-extinguishing UL94-V0

Color: black

#### **Certifications**

UL Recognized component with file n° E300607

Please contact Teknomega for non-specified tolerances.