



Scheda prodotto

Vivaldi Ulisse SOUND12



Diffusore passivo a 2 vie Bass-Reflex

Applicazioni: Live Sound P.A., D.J. System, Restaurants, Pub, Club, Auditorium, Theatres, Gym...

Woofer 32cm (12") magnete ceramico

Driver a compressione con bocca da 25mm (1") e bobina da 44mm (2")

Tromba 90°H x 60°V

Potenza 250W RMS

Potenza 400W musicale

Risposta in frequenza 50Hz-18kHz -6dB

Sensibilità 98dB

Maximum SPL / peak 120/123 dB

Dispersione 90°x60° (HxV)

Frequenza di Crossover 1.8 KHz

Neutrik Speakon NL4MP Linked

4 punti di ancoraggio M8, foro per stativo da 35mm

Ancoraggio staffa per installazioni a parete

1 maniglia integrata

Dimensioni 400x640x330 mm (LxHxP)

Peso 17 Kg

Cabinet plastica

Colore Antracite

Vivaldi srl nel costante impegno di migliorare i propri prodotti si riserva il diritto di apportare modifiche tecniche ed estetiche senza alcun



VIVALDi
UNITED GROUP

Ulisse
AUDIO VIDEO PROFESSIONAL

Giove
multiroom systems



DIGITAL TECH
CONTRACTOR



multiroom e domotica audio video - diffusori HiFi - audio Home Cinema - mobili Home Cinema - audio PA e professionale

obbligo di preavviso



Immagini

Vivaldi Ulisse SOUND12

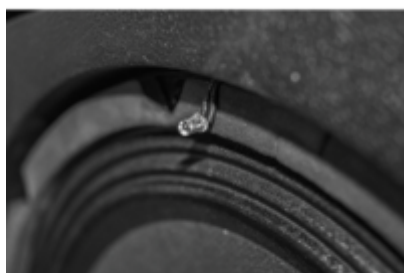



VIVALDI
UNITED GROUP

Ulise
AUDIO VIDEO PROFESSIONAL

Giove
multiroom systems



DIGITAL TECH
CONTRACTOR

multiroom e domotica audio video - diffusori HiFi - audio Home Cinema - mobili Home Cinema - audio PA e professionale

