



Scheda dati | Codice articolo: 770-319

Telaio a scatto Snap-In; 4 poli; 1,0 - 3,0 mm; nero


<https://www.wago.com/770-319>

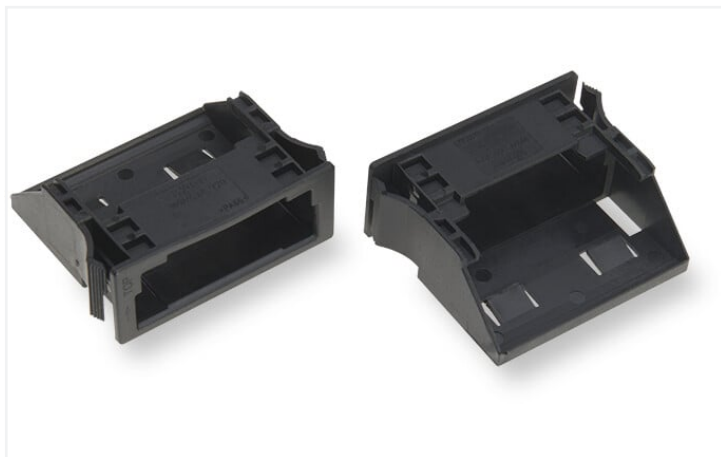

Colore: ■ nero

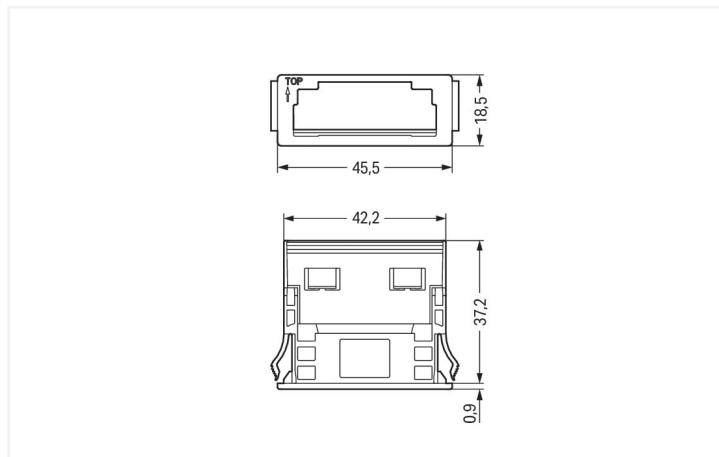

Misure in mm

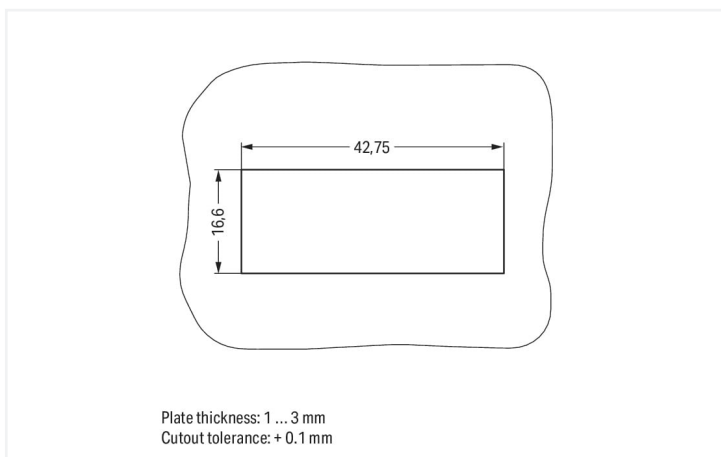

Misure in mm

Mounting accessories WINSTA® MIDI 4-pole

Implement the electrical installation easily and quickly: The mounting accessories from the WINSTA® MIDI product line is the product of your choice for error-free electrical installation. With WAGO, you benefit from a large selection of expansions for the WINSTA® product line. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is found in a variety of projects you can use for quick, easy and maximally flexible installation.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System is ideally tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and therefore more efficient, even more reliable, and error-free. Using this pre-assembled system decreases assembly times and errors during installation at the construction site. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with WINSTA® MIDI accessories with protection against mismatching from WAGO.

- for automation controllers
- rapid, structured electrical installation



Notes	
Nota	The snap-in connectors must be relieved of tensile and transverse forces. A surface finish can influence the edge radius of the cutouts. This may affect the snap-in socket fit, so ensure an adequate fit before use. In addition, the punched edge should be on the inside for punched cutouts. The wings of the snap-in connectors must not be mechanically stressed for a long period before use (e.g., due to a pre-locking position).

Dati di connessione	
Connessione 1	
N. poli	4

Dati geometrici	
Larghezza	45,5 mm / 1.791 pollici
Altezza	18,5 mm / 0.728 pollici
Profondità	37,2 mm / 1.465 pollici

Dati meccanici	
Spessore lamina custodia	1 ... 3 mm / 0.039 ... 0.118 pollici
Tipo montaggio	Innesto a scatto
Adatto	per presa e spina

Dati dei materiali	
Nota sui dati dei materiali	Information on material specifications can be found here
Colore	nero
Materiale isolante	Poliammide (PA66)
Classe di infiammabilità secondo UL 94	V0
Carico d'incendio	0.128 MJ
Peso	4,3 g

Requisiti ambientali	
Temperatura di lavorazione	-5 ... +40 °C
Temperatura operativa continua	-35 ... +85 °C
Nota sulla temperatura operativa continua	Parti isolanti per temperature ≤ 105 °C

Dati commerciali	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	100 pz.
Tipo imballaggio	laminazione
Paese d'origine	DE
GTIN	4055143404945
Numero tariffa doganale	85366990990

Environmental Product Compliance

RoHS Compliance Status

Compliant, No Exemption

Download

Documentation

Bid Text

770-319	19.02.2019	xml 2.57 KB	↓
770-319	13.04.2017	doc 23.50 KB	↓

CAD/CAE-Data

CAD data

2D/3D Models 770-319



CAE data

ZUKEN Portal 770-319



1 Prodotti compatibili

1.1 Accessori opzionali

1.1.1 Sistema di bloccaggio

1.1.1.1 Dispositivo di bloccaggio




N. art.: 770-140


Leva di bloccaggio; per prese e spine;
azionamento da dispositivo; grigio

Note di installazione

Installazione



Inserire il connettore maschio o femmina nel telaio (rispettare la scritta "TOP" sul telaio!), poi far scattare l'unità assemblata nell'apertura.



Far scattare l'unità assemblata nell'apertura.