

Scheda dati | Codice articolo: 770-339


Telaio a scatto Snap-In; 4 poli; 1,0 - 3,0 mm; bianco

<https://www.wago.com/770-339>



Colore: ■ bianco

Simile all'illustrazione

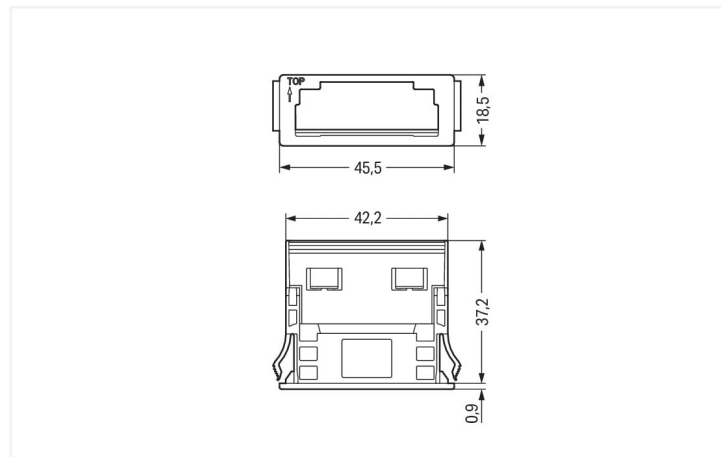

Misure in mm

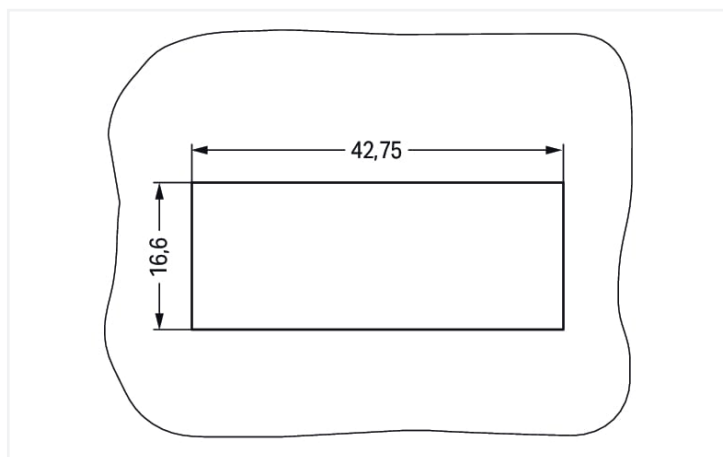


Plate thickness: 1 ... 3 mm

Cutout tolerance: + 0.1 mm

Please see note below!

Mounting accessories WINSTA® MIDI 4-pole

Put your trust in tried-and-tested accuracy for the installation in your project: The mounting accessories from the WINSTA® MIDI product line. With WAGO, you can enjoy the advantages of a large selection of expansions for the WINSTA® product line. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is found in a broad range of individual products you can use for quick, easy, flexible, and secure electrical installation.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

WINSTA® is the pluggable connection system that is optimally tailored to the strict requirements of electrical installation. It allows fast, secure and, above all, error-free installation of components and cables. Choose quality and durability – the WINSTA® MIDI accessory with protection against mis-mating from WAGO makes the installation of electrical components substantially easier.

- pre-assembled versions
- quick replacement of defective units during ongoing operation



Notes	
Nota	The snap-in connectors must be relieved of tensile and transverse forces. A surface finish can influence the edge radius of the cutouts. This may affect the snap-in socket fit, so ensure an adequate fit before use. In addition, the punched edge should be on the inside for punched cutouts. The wings of the snap-in connectors must not be mechanically stressed for a long period before use (e.g., due to a pre-locking position).

Dati di connessione	
Connessione 1	
N. poli	4

Dati geometrici	
Larghezza	45,5 mm / 1.791 pollici
Altezza	18,5 mm / 0.728 pollici
Profondità	37,2 mm / 1.465 pollici

Dati meccanici	
Spessore lamina custodia	1 ... 3 mm / 0.039 ... 0.118 pollici
Tipo montaggio	Innesto a scatto
Adatto	per presa e spina

Dati dei materiali	
Nota sui dati dei materiali	Information on material specifications can be found here
Colore	bianco
Materiale isolante	Poliammide (PA66)
Classe di infiammabilità secondo UL 94	V0
Carico d'incendio	0.128 MJ
Peso	4,3 g

Requisiti ambientali	
Temperatura di lavorazione	-5 ... +40 °C
Temperatura operativa continua	-35 ... +85 °C
Nota sulla temperatura operativa continua	Parti isolanti per temperature ≤ 105 °C

Dati commerciali	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	100 pz.
Tipo imballaggio	laminazione
Paese d'origine	DE
GTIN	4055143404952
Numero tariffa doganale	85366990990

Environmental Product Compliance

RoHS Compliance Status

Compliant, No Exemption

Download**Documentation****Bid Text**



770-339	19.02.2019	xml 2.57 KB	↓
770-339	13.04.2017	doc 23.50 KB	↓

CAD/CAE-Data**CAD data**

2D/3D Models 770-339

**CAE data**

ZUKEN Portal 770-339

**1 Prodotti compatibili****1.1 Accessori opzionali****1.1.1 Sistema di bloccaggio****1.1.1.1 Dispositivo di bloccaggio****N. art.: 770-140**Leva di bloccaggio; per prese e spine;
azionamento da dispositivo; grigio**Note di installazione****Installazione**Inserire il connettore maschio o femmina
nel telaio (rispettare la scritta "TOP" sul te-
laio!), poi far scattare l'unità assemblata
nell'apertura.Far scattare l'unità assemblata nell'aper-
tura.