




Colore: ■ bianco

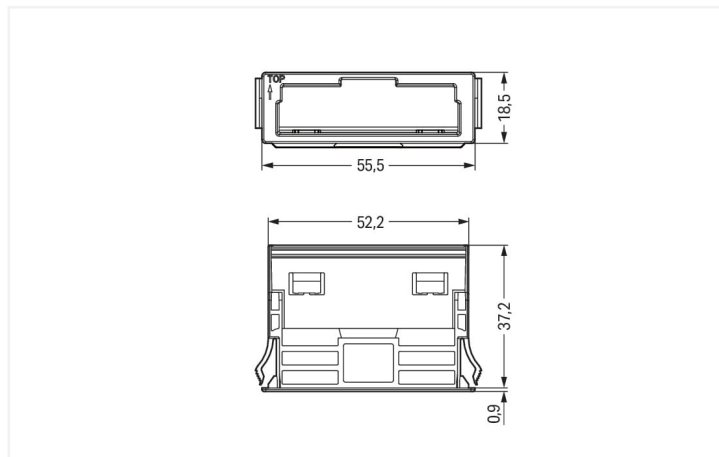

Misure in mm

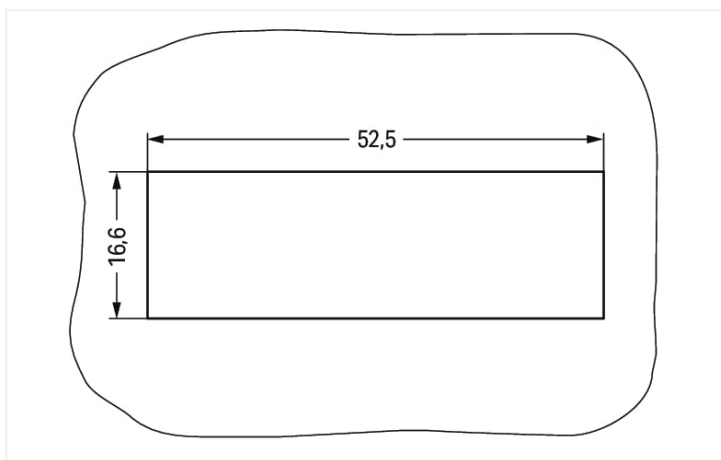


Plate thickness: 1 ... 3 mm
Cutout tolerance: + 0.1 mm

Please see note below!

Mounting accessories WINSTA® MIDI 5-pole

The mounting accessories from the WINSTA® MIDI product line guarantees you the maximum flexibility in electrical installation. You can rely on the level of quality of WINSTA® components from WAGO for your electrical installation accessories too. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is used in can be found in a variety of projects you can use for quick, easy, secure, tailored installation.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with WINSTA® MIDI accessories with protection against mismatching from WAGO.

- pre-assembled versions
- quick replacement of defective units during ongoing operation



Notes	
Nota	The snap-in connectors must be relieved of tensile and transverse forces. A surface finish can influence the edge radius of the cutouts. This may affect the snap-in socket fit, so ensure an adequate fit before use. In addition, the punched edge should be on the inside for punched cutouts. The wings of the snap-in connectors must not be mechanically stressed for a long period before use (e.g., due to a pre-locking position).

Dati di connessione	
Connessione 1	
N. poli	5

Dati geometrici	
Larghezza	55,5 mm / 2.185 pollici
Altezza	18,5 mm / 0.728 pollici
Profondità	37,5 mm / 1.476 pollici

Dati meccanici	
Spessore lamina custodia	1 ... 3 mm / 0.039 ... 0.118 pollici
Tipo montaggio	Innesto a scatto
Adatto	per presa e spina

Dati dei materiali	
Nota sui dati dei materiali	Information on material specifications can be found here
Colore	bianco
Materiale isolante	Poliammide (PA66)
Classe di infiammabilità secondo UL 94	V0
Carico d'incendio	0.158 MJ
Peso	5,3 g

Requisiti ambientali	
Temperatura di lavorazione	-5 ... +40 °C
Temperatura operativa continua	-35 ... +85 °C
Nota sulla temperatura operativa continua	Parti isolanti per temperature ≤ 105 °C

Dati commerciali	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	100 pz.
Tipo imballaggio	borsa
Paese d'origine	DE
GTIN	4055144020854
Numero tariffa doganale	85366990990



Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvazioni/certificati

Certificazioni per applicazioni nautiche



Certificazione	Standard	Nome del certificato
LR Lloyds Register	IEC 61984	LR22429487TA

Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-340

↓

Documentation			
Bid Text			
770-340	19.02.2019	xml 2.67 KB	↓
770-340	10.12.2014	doc 23.50 KB	↓

CAD/CAE-Data	
CAD data 2D/3D Models 770-340 ↓	CAE data WSCAD Universe 770-340 ↓ ZUKEN Portal 770-340 ↓

1 Prodotti compatibili

1.1 Accessori opzionali

1.1.1 Sistema di bloccaggio

1.1.1.1 Dispositivo di bloccaggio




N. art.: 770-140


Leva di bloccaggio; per prese e spine;
azionamento da dispositivo; grigio

Note di installazione

Installazione



Inserire il connettore maschio o femmina nel telaio (rispettare la scritta "TOP" sul telaio!), poi far scattare l'unità assemblata nell'apertura.



Far scattare l'unità assemblata nell'apertura.