


Custodia antistrappo; 5 poli; per 1 cavo; 11,5 - 16,5 mm; 71 mm; nero



<https://www.wago.com/770-505/021-000>



Colore: ■ nero

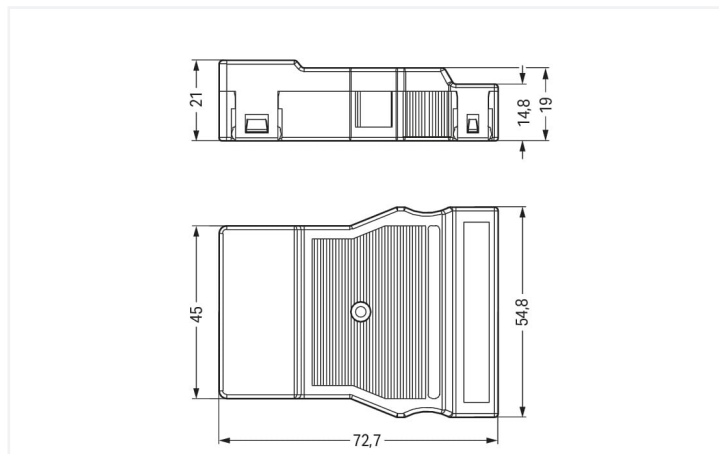

Misura in mm

Strain relief housing *WINSTA*® MIDI 5-pole

The strain relief housing from the *WINSTA*® MIDI product line is the sophisticated solution for reliable installation. A comprehensive range of accessories complements the *WINSTA*® product line from WAGO. The *WINSTA*® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates precise electrification. Due to the integrated test slot, it is possible to check connections even when they are plugged in. That saves time and reduces installation labor and costs. A range up to 71 mm can be used for the strip length.

WINSTA® MIDI solutions for your electrical installation – maintenance-free

The WINSTA® Pluggable Connection System is ideally tailored to the very strict requirements of building installation. It makes electrical installation plug-
gable, and therefore faster, even more reliable, and error-free. Use of this pre-assembled system reduces assembly times and errors during installation
at the construction site. Now you can also reduce installation costs without compromising quality and safety: The WINSTA® MIDI accessory reduces the
need for servicing and prevents unnecessary downtime.

- for automation controllers
- convenient installation and commissioning

Dati di connessione

Connessione 1

N. poli	5
Diametro del cavo inguainato collegabile	11,5 ... 16,5 mm
Lunghezza spelatura (isolante esterno)	71 mm

Dati geometrici

Larghezza	54,75 mm / 2.156 pollici
Altezza	21 mm / 0.827 pollici
Profondità	72,7 mm / 2.862 pollici

Dati dei materiali	
Nota sui dati dei materiali	Information on material specifications can be found here
Colore	nero
Gruppo materiale	I
Materiale isolante	Poliammide (PA66)
Classe di infiammabilità secondo UL 94	V0
Carico d'incendio	0.565 MJ
Peso	19,4 g

Requisiti ambientali	
Temperatura di lavorazione	-5 ... +40 °C
Temperatura operativa continua	-35 ... +85 °C
Nota sulla temperatura operativa continua	Parti isolanti per temperature ≤ 105 °C

Dati commerciali	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	25 pz.
Tipo imballaggio	Box
Paese d'origine	DE
GTIN	4045454026219
Numero tariffa doganale	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvazioni/certificati	
Omologazioni generali	



Certificazione	Standard	Nome del certificato
cURus Underwriters Laboratories Inc.	UL 1977	E45171
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61535	40029808

Download
Environmental Product Compliance



Compliance Search			
Environmental Product Compliance 770-505/021-000			

Documentation			
Bid Text			
770-505/021-000	19.02.2019	xml 2.84 KB	
770-505/021-000	10.12.2014	doc 24.00 KB	

CAD/CAE-Data	
CAD data 2D/3D Models 770-505/021-000	CAE data EPLAN Data Portal 770-505/021-000 WSCAD Universe 770-505/021-000 ZUKEN Portal 770-505/021-000

1 Prodotti compatibili
1.1 Accessori opzionali
1.1.1 Marcatura
1.1.1.1 Striscia di marcatura



N. art.: 210-333
Strisce di marcatura; come un foglio DIN A4; Larghezza striscia 6 mm; Lunghezza striscia 182 mm; vuoto; Autoadesivo; bianco