

# Scheda dati | Codice articolo: 770-516/029-000

Custodia antistrappo; 6 poli; per 2 cavi; 8,5 - 13,5 mm; 55 mm; bianco




<https://www.wago.com/770-516/029-000>



Colore:   bianco


Straight design

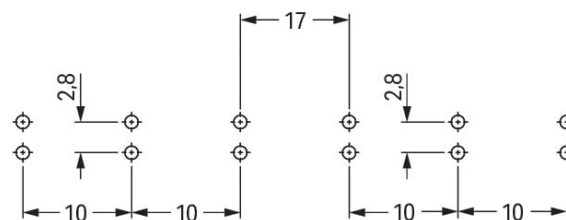

Drilled hole diameter:  $1.5^{+0.1}$  mm


Misure in mm

Angled design

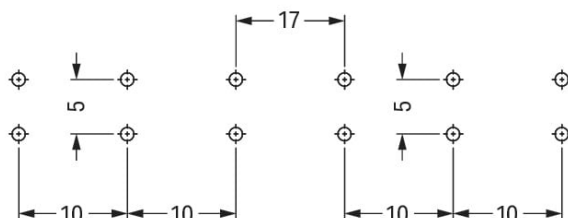

Drilled hole diameter:  $1.5^{+0.1}$  mm

Misure in mm

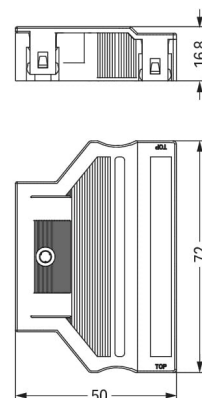

Misure in mm

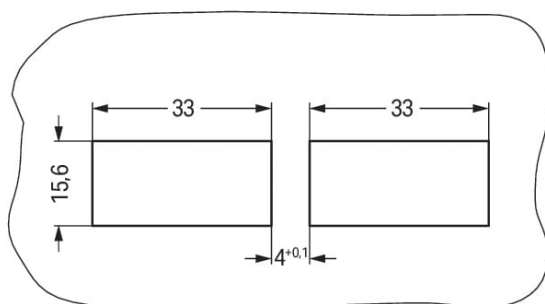


Plate thickness: 0.5 ... 2 mm  
Cutout tolerance: + 0.1 mm

Misure in mm



Strain relief housing *WINSTA*® MIDI 6-pole

The strain relief housing from the *WINSTA*® MIDI product line is the best solution for straightforward electrical installation. With WAGO, you can enjoy the advantages of a large selection of accessories for the *WINSTA*® product line. The *WINSTA*® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates exemplary electrification. Due to the integrated test slot, it is possible to check connections even when they are plugged in. This saves time, labor, and money. The strip length is 55 mm.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The *WINSTA*® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Now you can also lower installation expenses without compromising quality and safety: The *WINSTA*® MIDI accessory eliminates the need for servicing and prevents unnecessary downtime.

- pre-assembled versions
- fast, secure installation

Dati di connessione

Connessione 1	
N. poli	6
Diametro del cavo inguainato collegabile	8,5 ... 13,5 mm
Lunghezza spelatura (isolante esterno)	55 mm

Dati geometrici

Larghezza	72 mm / 2.835 pollici
Altezza	16,8 mm / 0.661 pollici
Profondità	50 mm / 1.969 pollici

Dati dei materiali

Nota sui dati dei materiali	<a href="https://www.wago.com/us/material-specifications" href="_blank">Information on material specifications can be found here</a>
Colore	bianco
Materiale isolante	Poliammide (PA66)
Classe di infiammabilità secondo UL 94	V0
Carico d'incendio	0.466 MJ
Peso	16,6 g

Requisiti ambientali

Temperatura di lavorazione	-5 ... +40 °C
Temperatura operativa continua	-35 ... +85 °C
Nota sulla temperatura operativa continua	Parti isolanti per temperature ≤ 105 °C

Dati commerciali

eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	20 pz.
Tipo imballaggio	Box
Paese d'origine	DE
GTIN	4045454001810
Numero tariffa doganale	8538909990





Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvazioni/certificati
Certificazioni per applicazioni nautiche



Certificazione	Standard	Nome del certificato
LR Lloyds Register	IEC 61984	LR22429487TA

Download
Environmental Product Compliance
Compliance Search
Environmental Product Compliance 770-516/029-000

Documentation			
Bid Text			
770-516/029-000	19.02.2019	xml 2.84 KB	
770-516/029-000	06.01.2015	doc 23.50 KB	

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 770-516/029-000	WSCAD Universe 770-516/029-000
	ZUKEN Portal 770-516/029-000

1 Prodotti compatibili
1.1 Accessori opzionali
1.1.1 Marcatura

### 1.1.1.1 Striscia di marcatura




**N. art.: 210-333**

Strisce di marcatura; come un foglio DIN A4; Larghezza striscia 6 mm; Lunghezza striscia 182 mm; vuoto; Autoadesivo; bianco

## Note di installazione

### Applicazione



Custodie antistrappo con innesto a scatto  
per: Due prese a 3 poli Due spine a 3 poli-  
prese e spine tripolari