


Scheda dati | Codice articolo: 770-517/047-000

Custodia antistrappo; 7 poli; con clip di bloccaggio; per 1 cavo; 8,0 - 15,0 mm; 55 mm; bianco


<https://www.wago.com/770-517/047-000>



Colore: ■ bianco

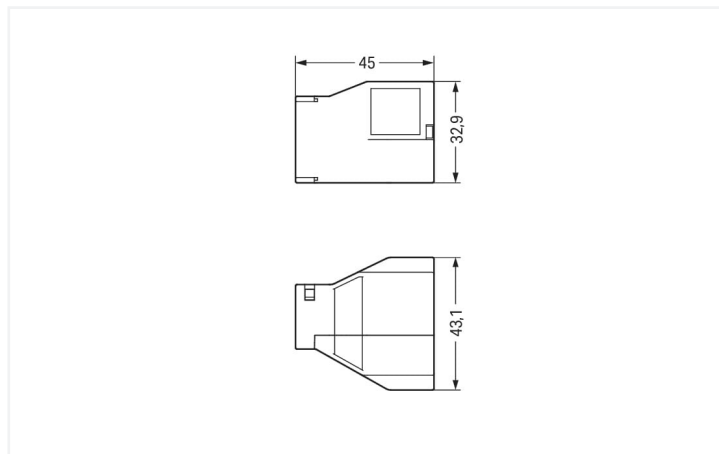

Misure in mm

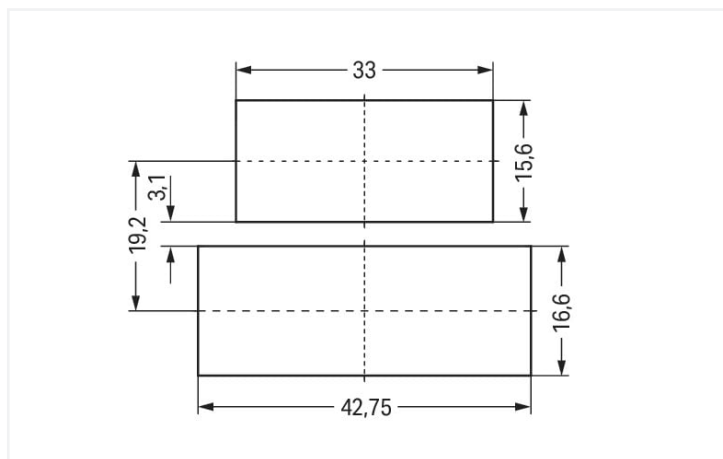

Misure in mm

Strain relief housing *WINSTA*® MIDI 7-pole

The strain relief housing from the *WINSTA*® MIDI product line is the intelligent solution for straightforward electrical installation. You can rely on the level of quality of *WINSTA*® components from WAGO for your electrical installation accessories too. The *WINSTA*® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates safe electrification. Thanks to the integrated test slot, connections can be checked even when they are plugged in. That saves time and reduces installation labor and costs. The strip length is 55 mm.

Lower costs through fast commissioning and elimination of service expenses – solutions from *WINSTA*® MIDI

The *WINSTA*® Pluggable Connection System is perfectly tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and consequently faster, more reliable, and error-free. Use of this pre-assembled system reduces assembly times and installation errors at the construction site. Choose durability and quality – the *WINSTA*® MIDI accessory from WAGO makes the electrical installation of electrical components significantly easier.

- for automation controllers
- convenient installation and commissioning

Dati di connessione



Connessione 1	
N. poli	7
Diametro del cavo inguainato collegabile	8 ... 15 mm
Lunghezza spelatura (isolante esterno)	55 mm

Dati geometrici	
Larghezza	43,1 mm / 1.697 pollici
Altezza	32,9 mm / 1.295 pollici
Profondità	45 mm / 1.772 pollici

Dati dei materiali	
Nota sui dati dei materiali	Information on material specifications can be found here
Colore	bianco
Materiale isolante	Poliammide (PA66)
Classe di infiammabilità secondo UL 94	V0
Carico d'incendio	0.413 MJ
Peso	13,7 g

Requisiti ambientali	
Temperatura di lavorazione	-5 ... +40 °C
Temperatura operativa continua	-35 ... +85 °C
Nota sulla temperatura operativa continua	Parti isolanti per temperature ≤ 105 °C

Dati commerciali	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	200 pz.
Tipo imballaggio	Box
Paese d'origine	DE
GTIN	4045454554460
Numero tariffa doganale	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvazioni/certificati

Certificazioni per applicazioni nautiche



Certificazione	Standard	Nome del certificato
LR Lloyds Register	IEC 61984	LR22429487TA

Download

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance 770-517/047-000			

Documentation

Bid Text			
770-517/047-000	19.02.2019	xml 2.82 KB	
770-517/047-000	06.01.2015	doc 23.50 KB	

CAD/CAE-Data

CAE data	
WSCAD Universe 770-517/047-000	

1 Prodotti compatibili

1.1 Accessori opzionali

1.1.1 Marcatura

1.1.1.1 Striscia di marcatura



N. art.: 210-333
Strisce di marcatura; come un foglio DIN A4; Larghezza striscia 6 mm; Lunghezza striscia 182 mm; vuoto; Autoadesivo; bianco

Note di installazione

Applicazione



Custodie antistrappo con innesto a scatto per: Presa o spina a 3 poli Presa o spina a 4 poli

"Connessioni volanti"
(ATTENZIONE: usare solo leve di bloccaggio in posizione superiore!)

"Connessioni volanti"