

Scheda dati | Codice articolo: 770-625


Piastra di montaggio; 5 poli; per connettori di distribuzione; plastica; nero




<https://www.wago.com/770-625>



Colore: ■ nero

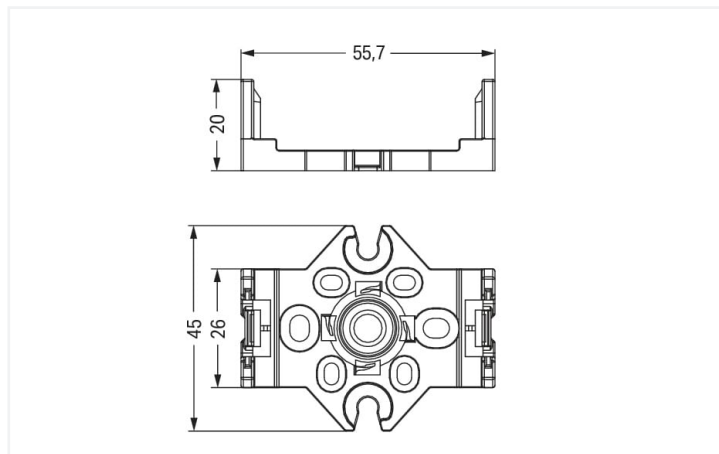

Misure in mm

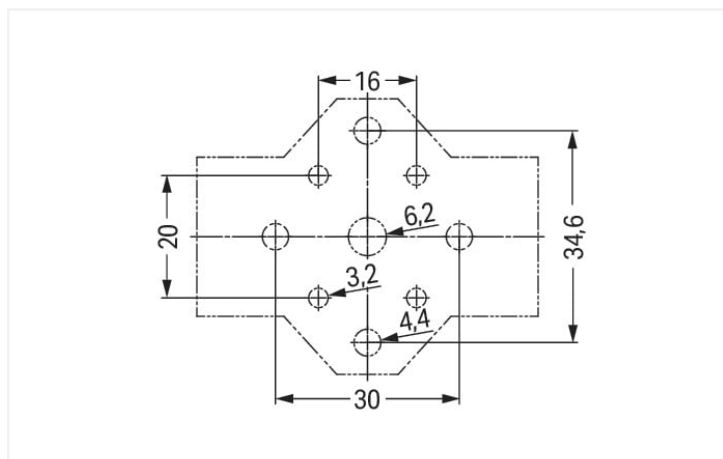

Misure in mm

Mounting accessories WINSTA® MIDI 5-pole

Realize the electrical installation without difficulty: The mounting accessories from the WINSTA® MIDI product line is the solution for quick, straightforward installation. You can rely on the level of quality of WINSTA® components from WAGO for your electrical installation accessories too. The WINSTA® MIDI product line achieves total flexibility for the installation of applications. With its Push-in CAGE CLAMP® spring pressure connection technology, it ensures time-saving, error-free installation and offers flexibility for meeting an enormous variety of installation requirements.

WINSTA® MIDI solutions for your electrical installation – maintenance-free

The WINSTA® Pluggable Connection System is perfectly tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and consequently more efficient, even more reliable, and error-free. Using this pre-assembled system decreases time spent on assembly and installation errors at the construction site. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with WINSTA® MIDI accessories from WAGO.

- pre-assembled versions
- quick replacement of defective units during ongoing operation

Dati di connessione



Connessione 1	
N. poli	5

Dati meccanici	
Tipo montaggio	Fissaggio a vite
Adatto	per connettori di distribuzione (eccetto distributore tipo T); 5 poli

Dati dei materiali	
Nota sui dati dei materiali	Information on material specifications can be found here
Colore	nero
Materiale isolante	Poliammide (PA66)
Classe di infiammabilità secondo UL 94	V0
Carico d'incendio	0.19 MJ
Peso	6,4 g

Requisiti ambientali	
Temperatura di lavorazione	-5 ... +40 °C
Temperatura operativa continua	-35 ... +85 °C
Nota sulla temperatura operativa continua	Parti isolanti per temperature ≤ 105 °C

Dati commerciali	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	25 pz.
Tipo imballaggio	Box
Paese d'origine	DE
GTIN	4017332755399
Numero tariffa doganale	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-625

↓

Documentation



Bid Text			
770-625	19.02.2019	xml 2.55 KB	↓
770-625	13.01.2015	doc 22.50 KB	↓
ausschreiben.de 770-625			↓

CAD/CAE-Data	
CAD data 2D/3D Models 770-625 ↓	CAE data WSCAD Universe 770-625 ↓ ZUKEN Portal 770-625 ↓

1 Prodotti compatibili
1.1 Accessori opzionali
1.1.1 Montaggio
1.1.1.1 Accessori di montaggio



N. art.: 890-601 Fixing pin; 5 mm Ø, for 1.5 ... 2.5 mm mounting plates; Plastic; black	N. art.: 770-601 Fixing pin; 6 mm Ø, for 2.5 ... 4.0 mm mounting plates; Plastic; black
---	---