


Scheda dati | Codice articolo: 890-503

Custodia antistrappo; 3 poli; con clip di bloccaggio; per 1 cavo; 4,5 - 10,0 mm; 37 mm; nero

<https://www.wago.com/890-503>



Colore: ■ nero

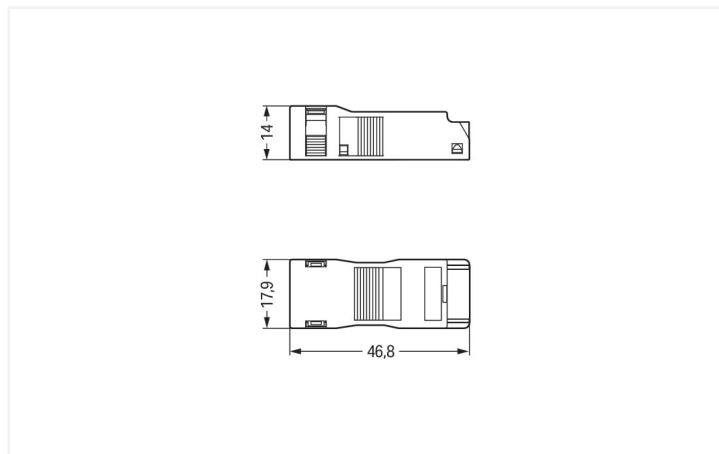

Misure in mm

Strain relief housing WINSTA® MINI 3-pole

The strain relief housing from the WINSTA® MINI product line guarantees you the maximum flexibility in electrical installation. With WAGO, you benefit from a large selection of expansions for the WINSTA® product line. WINSTA® MINI is our response to the trend toward miniaturisation. Our smallest pluggable connection system is primarily suited for lights, for instance, since as a result of LED technology; due to complex systems, these offer significantly less space for the connection technology. The strip length is 40 mm.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System is perfectly tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and therefore more efficient, more reliable, and error-free. Use of this pre-assembled system decreases assembly times and installation errors at the construction site. Now you can also lower installation costs without compromising quality and safety: The WINSTA® MINI accessory reduces the need for servicing and prevents unnecessary downtime.

- easy tool-free operation, a wide range of coding options
- convenient installation and commissioning

Dati di connessione

Connessione 1

N. poli	3
Diametro del cavo inguainato collegabile	4,5 ... 10 mm
Lunghezza spelatura (isolante esterno)	40 mm

Dati geometrici

Larghezza	17,9 mm / 0.705 pollici
Altezza	14 mm / 0.551 pollici
Profondità	46,8 mm / 1.843 pollici

Dati dei materiali	
Nota sui dati dei materiali	Information on material specifications can be found here
Colore	nero
Materiale isolante	Poliammide (PA66)
Classe di infiammabilità secondo UL 94	V0
Carico d'incendio	0.135 MJ
Peso	3,5 g

Requisiti ambientali	
Temperatura di lavorazione	-5 ... +40 °C
Temperatura operativa continua	-35 ... +85 °C
Nota sulla temperatura operativa continua	Parti isolanti per temperature ≤ 105 °C

Dati commerciali	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	50 pz.
Tipo imballaggio	Box
Paese d'origine	DE
GTIN	4045454233327
Numero tariffa doganale	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvazioni/certificati	
Omologazioni generali	



Certificazione	Standard	Nome del certificato
cURus Underwriters Laboratories Inc.	UL 1977	E45171

Download
Environmental Product Compliance

Compliance Search			
Environmental Product Compliance 890-503			

Documentation			
Bid Text			
890-503	19.02.2019	xml 2.75 KB	
890-503	24.11.2014	doc 23.50 KB	

CAD/CAE-Data			
CAD data		CAE data	
2D/3D Models 890-503		EPLAN Data Portal 890-503	
		WSCAD Universe 890-503	
		ZUKEN Portal 890-503	

1 Prodotti compatibili
1.1 Accessori opzionali
1.1.1 Connessione schermata
1.1.1.1 Connessione schermata



N. art.: 890-523
Piastra connessione schermo; 3 poli; per prese e spine; argento-colorato