



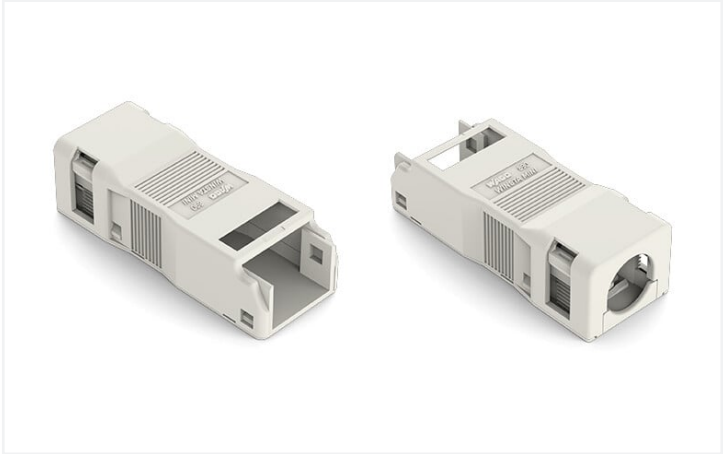

Colore: bianco

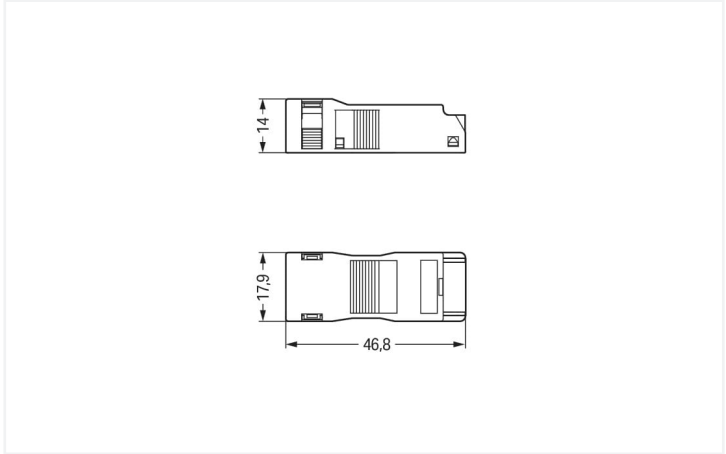

Misure in mm

Strain relief housing *WINSTA*® MINI 3-pole

Realize your installation project with ease: The strain relief housing from the *WINSTA*® MINI product line is the product of your choice for error-free electrical installation. A comprehensive range of accessories rounds out the *WINSTA*® product line from WAGO. If only limited space is available, our smallest pluggable connection system, *WINSTA*® MINI, consistently displays its advantages. It saves space, and, thanks to Push-in CAGE CLAMP® spring pressure connection technology, it additionally can be installed quickly, since the installation is low-maintenance and can be performed without screw connections. The strip length is 40 mm.

WINSTA® MINI solutions for your electrical installation – maintenance-free

The *WINSTA*® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Now you can also cut installation costs without compromising safety and quality: The *WINSTA*® MINI accessory reduces the need for servicing and prevents unnecessary downtime.

- compact design for conductors with a cross-section up to 1.5 mm²
- fast, secure installation

Dati di connessione		
Connessione 1		
N. poli	3	
Diametro del cavo inguainato collegabile	4,5 ... 10 mm	
Lunghezza spelatura (isolante esterno)	40 mm	

Dati geometrici		
Larghezza	17,9 mm / 0.705 pollici	
Altezza	14 mm / 0.551 pollici	
Profondità	46,8 mm / 1.843 pollici	

Dati dei materiali	
Nota sui dati dei materiali	Information on material specifications can be found here
Colore	bianco
Materiale isolante	Poliammide (PA66)
Classe di infiammabilità secondo UL 94	V0
Carico d'incendio	0.191 MJ
Peso	3,8 g

Requisiti ambientali	
Temperatura di lavorazione	-5 ... +40 °C
Temperatura operativa continua	-35 ... +85 °C
Nota sulla temperatura operativa continua	Parti isolanti per temperature ≤ 105 °C

Dati commerciali	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	50 pz.
Tipo imballaggio	Box
Paese d'origine	DE
GTIN	4045454233365
Numero tariffa doganale	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvazioni/certificati	
Omologazioni generali	



Certificazione	Standard	Nome del certificato
cURus Underwriters Laboratories Inc.	UL 1977	E45171

Download
Environmental Product Compliance



Compliance Search			
Environmental Product Compliance 890-513			↓

Documentation			
Bid Text			
890-513	19.02.2019	xml 2.75 KB	↓
890-513	24.11.2014	doc 23.50 KB	↓

CAD/CAE-Data			
CAD data		CAE data	
2D/3D Models 890-513		EPLAN Data Portal 890-513	↓
		WSCAD Universe 890-513	↓
		ZUKEN Portal 890-513	↓

1 Prodotti compatibili
1.1 Accessori opzionali
1.1.1 Connessione schermata
1.1.1.1 Connessione schermata



N. art.: 890-523
Piastra connessione schermo; 3 poli; per prese e spine; argento-colorato