



Scheda dati | Codice articolo: 890-514

Custodia antistrappo; 4 poli; con clip di bloccaggio; per 1 cavo; 6,5 - 10,5 mm; 45 mm; bianco

<https://www.wago.com/890-514>

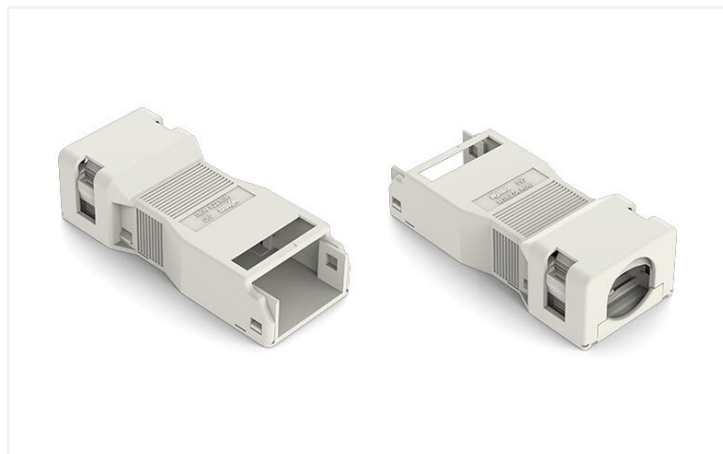

Colore: ■ bianco

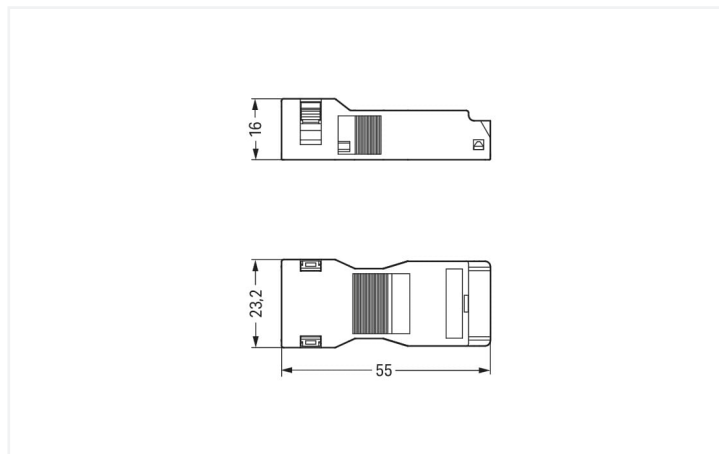

Misure in mm

Strain relief housing *WINSTA*® MINI 4-pole

Implement your installation project with ease: The strain relief housing from the *WINSTA*® MINI product line is the solution for error-free electrical installation. You can rely on the level of quality of *WINSTA*® components from WAGO for your electrical installation accessories too. *WINSTA*® MINI follows the trend towards miniaturisation. Our smallest pluggable connection system is very good for lights, for example, since as a result of LED technology; due to complex systems, these offer much less space for the connection technology. A range up to 45 mm can be used for the strip length.

Lower costs through fast commissioning and elimination of service expenses – solutions from *WINSTA*® MINI

The *WINSTA*® Pluggable Connection System is perfectly tailored to the strict requirements of building installation. It makes electrical installation pluggable, and consequently faster, more reliable, and error-free. Using this pre-assembled system decreases time spent on assembly and installation errors at the construction site. Now you can also lower installation costs without compromising safety and quality: The *WINSTA*® MINI accessory eliminates the need for servicing and prevents unnecessary downtime.

- compact design for conductors with a cross-section up to 1.5 mm²
- convenient installation and commissioning

Dati di connessione

Connessione 1

N. poli	4
Diametro del cavo inguainato collegabile	6,5 ... 10,5 mm
Lunghezza spelatura (isolante esterno)	45 mm

Dati geometrici

Larghezza	23,2 mm / 0.913 pollici
Altezza	16 mm / 0.63 pollici
Profondità	55 mm / 2.165 pollici



Dati dei materiali	
Nota sui dati dei materiali	Information on material specifications can be found here
Colore	bianco
Materiale isolante	Poliammide (PA66)
Classe di infiammabilità secondo UL 94	V0
Carico d'incendio	0.181 MJ
Peso	5,7 g

Requisiti ambientali	
Temperatura di lavorazione	-5 ... +40 °C
Temperatura operativa continua	-35 ... +85 °C
Nota sulla temperatura operativa continua	Parti isolanti per temperature ≤ 105 °C

Dati commerciali	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	50 pz.
Tipo imballaggio	Box
Paese d'origine	DE
GTIN	4045454233372
Numero tariffa doganale	85366990990

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Download	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 890-514	

Documentation			
Bid Text			
890-514	19.02.2019	xml 2.73 KB	
890-514	01.12.2014	doc 23.50 KB	

CAD/CAE-Data



CAD data	
2D/3D Models 890-514	

CAE data	
WSCAD Universe 890-514	
ZUKEN Portal 890-514	