


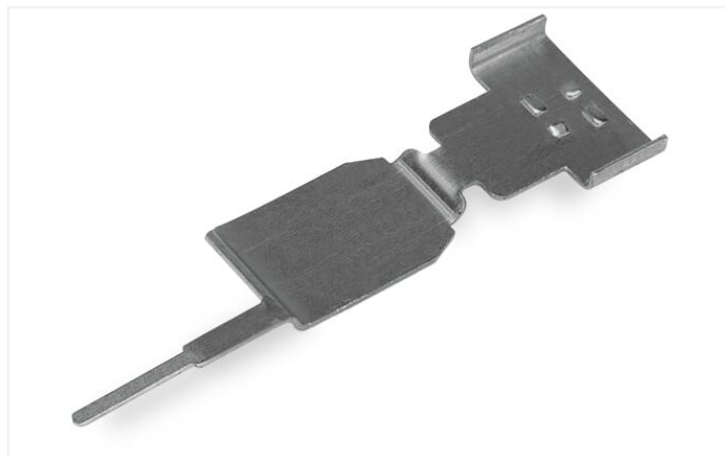

Shield termination WINSTA® MINI 5-pole

The shield termination from the WINSTA® MINI product line is the best solution for reliable installation. With WAGO, you benefit from a large selection of accessories for the WINSTA® product line. If only limited space is available, our smallest pluggable connection system, WINSTA® MINI, consistently displays its advantages. It is very compact, and, with Push-in CAGE CLAMP® spring pressure connection technology, it additionally saves time, since the connection is low-maintenance and can be performed without screw connections.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with WINSTA® MINI accessories with protection against mismatching from WAGO.

- easy tool-free operation, a wide range of coding options
- rapid, structured electrical installation

Dati di connessione

Connessione 1

N. poli	5
---------	---

Dati meccanici

Adatto	per presa
--------	-----------

Dati dei materiali

Nota sui dati dei materiali	
	Information on material specifications can be found here
Carico d'incendio	0 MJ
Peso	1,8 g
Materiale	SE Cu; stagnatura speciale



Requisiti ambientali	
Temperatura di lavorazione	-5 ... +40 °C
Temperatura operativa continua	-35 ... +85 °C
Nota sulla temperatura operativa continua	Parti isolanti per temperature ≤ 105 °C

Dati commerciali	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	50 (1) pz.
Tipo imballaggio	Box
Paese d'origine	DE
GTIN	4055143672757
Numero tariffa doganale	85366990990

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Download

Documentation

Bid Text			
890-526	19.02.2019	xml 2.52 KB	
890-526	21.03.2018	doc 22.50 KB	