

Scheda dati | Codice articolo: 890-625


Piastra di montaggio; 5 poli; per connettori di distribuzione; plastica; nero




<https://www.wago.com/890-625>



Colore: ■ nero

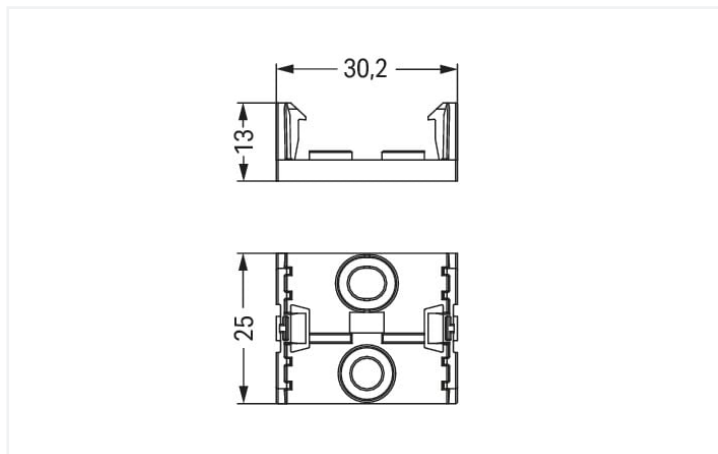

Misure in mm

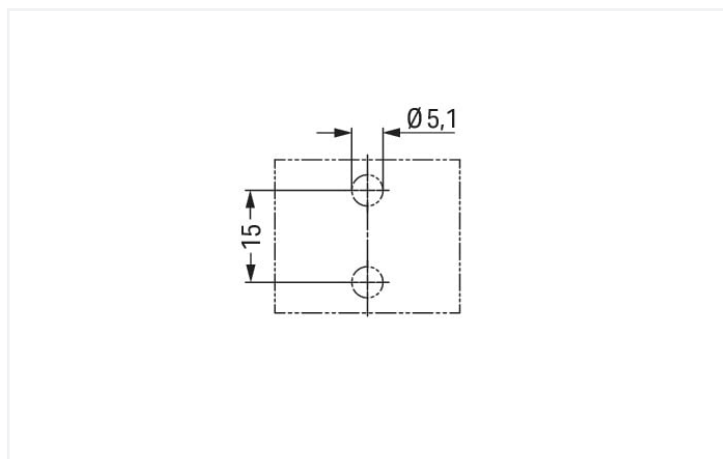

Misure in mm

Mounting accessories WINSTA® MINI 5-pole

Put your trust in tried-and-tested accuracy for the installation for the implementation of your project: The mounting accessories from the WINSTA® MINI product line. You can rely on the quality of WINSTA® components from WAGO for your electrical installation accessories too. WINSTA® MINI satisfies the demand for miniaturisation. Our smallest pluggable connection system is very good for lights, for example, since as a result of LED technology; due to complex systems, these offer significantly less space for the connection technology.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System is ideally tailored to the strict requirements of building installation. It makes electrical installation pluggable, and thus more efficient, more reliable, and error-free. Use of this pre-assembled system decreases assembly times and errors during installation at the construction site. Choose durability and quality – the WINSTA® MINI accessory from WAGO makes the installation of electrical components noticeably easier.

- easy tool-free operation, a wide range of coding options
- quick replacement of defective units during ongoing operation

Dati di connessione



Connessione 1	
N. poli	5

Dati meccanici	
Tipo montaggio	Fissaggio a vite
Adatto	per connettori di distribuzione (eccetto distributore tipo T); 5 poli

Dati dei materiali	
Nota sui dati dei materiali	Information on material specifications can be found here
Colore	nero
Materiale isolante	Poliammide (PA66)
Classe di infiammabilità secondo UL 94	V0
Carico d'incendio	0.106 MJ
Peso	2,4 g

Requisiti ambientali	
Temperatura di lavorazione	-5 ... +40 °C
Temperatura operativa continua	-35 ... +85 °C
Nota sulla temperatura operativa continua	Parti isolanti per temperature ≤ 105 °C

Dati commerciali	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	50 (50) pz.
Tipo imballaggio	Box
Paese d'origine	DE
GTIN	4055143838757
Numero tariffa doganale	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvazioni/certificati	
Certificazioni per applicazioni nautiche	



Certificazione	Standard	Nome del certificato
LR Lloyds Register	EN 61535	08/20047 (E2)

Download
Environmental Product Compliance



Compliance Search			
Environmental Product Compliance 890-625			↓

Documentation			
Bid Text			
890-625	11.03.2015	doc 21.50 KB	↓
890-625	19.02.2019	xml 2.55 KB	↓

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 890-625	WSCAD Universe 890-625
↓	↓
	ZUKEN Portal 890-625
	↓