

Scheda dati | Codice articolo: 890-675


Piastra di montaggio; 5 poli; per connettori di distribuzione; plastica; bianco




<https://www.wago.com/890-675>



Colore: ■ bianco

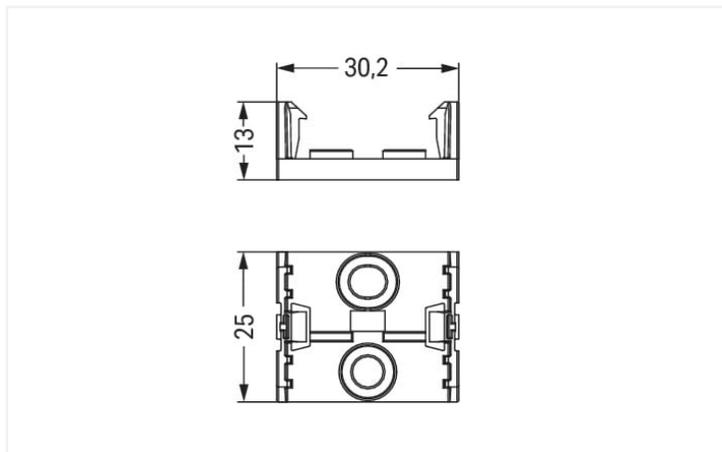

Misure in mm

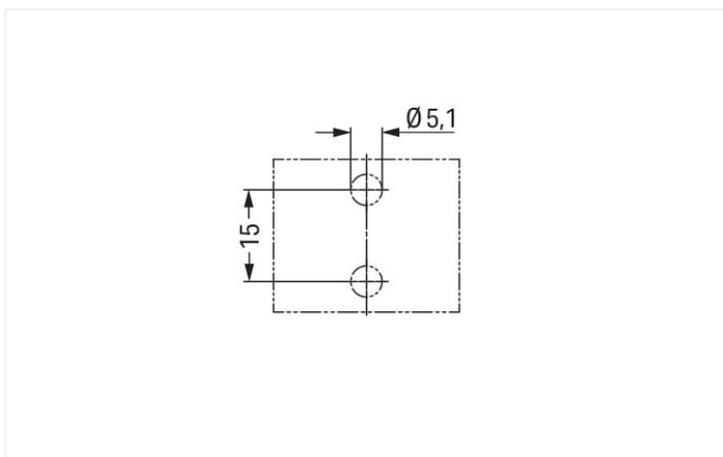

Misure in mm

Mounting accessories WINSTA® MINI 5-pole

Choose reliable safety for the installation at your construction site: The mounting accessories from the WINSTA® MINI product line. With WAGO, you benefit from a large selection of expansions for the WINSTA® product line. WINSTA® MINI is our response to the trend toward miniaturisation. Our smallest pluggable connection system is especially suitable for lights, for instance, since due to LED technology, these offer much less space for the connection technology.

WINSTA® MINI solutions for your electrical installation – maintenance-free

The WINSTA® Pluggable Connection System is perfectly tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and therefore more efficient, more reliable, and error-free. Use of this pre-assembled system reduces time spent on assembly and errors during installation at the construction site. Choose durability and quality – the WINSTA® MINI accessory from WAGO makes the electrical installation of electrical components visibly easier.

- compact design for conductors with a cross-section up to 1.5 mm²
- quick replacement of defective units during ongoing operation

Dati di connessione

Connessione 1

N. poli 5

Dati meccanici

Tipo montaggio Fissaggio a vite
 Adatto per connettori di distribuzione (eccetto distributore tipo T); 5 poli

Dati dei materiali

Nota sui dati dei materiali [Information on material specifications can be found here](_blank)

Colore bianco
 Materiale isolante Poliammide (PA66)
 Classe di infiammabilità secondo UL 94 V0
 Carico d'incendio 0.071 MJ
 Peso 2,4 g

Requisiti ambientali

Temperatura di lavorazione -5 ... +40 °C
 Temperatura operativa continua -35 ... +85 °C
 Nota sulla temperatura operativa continua Parti isolanti per temperature ≤ 105 °C

Dati commerciali

eCl@ss 10.0 27-44-06-92
 eCl@ss 9.0 27-44-06-92
 ETIM 8.0 EC002863
 ETIM 7.0 EC002863
 PU (SPU) 50 (50) pz.
 Tipo imballaggio Box
 Paese d'origine DE
 GTIN 4055143838863
 Numero tariffa doganale 85366990990

Environmental Product Compliance

RoHS Compliance Status Compliant, No Exemption

Download

Environmental Product Compliance

Compliance Search

Environmental Product
 Compliance 890-675



Documentation

Bid Text			
890-675	19.02.2019	xml 2.55 KB	↓
890-675	11.03.2015	doc 21.50 KB	↓

CAD/CAE-Data

CAD data
2D/3D Models 890-675 ↓

CAE data
WSCAD Universe 890-675 ↓
ZUKEN Portal 890-675 ↓