


Profilo di protezione, 3p (01554)

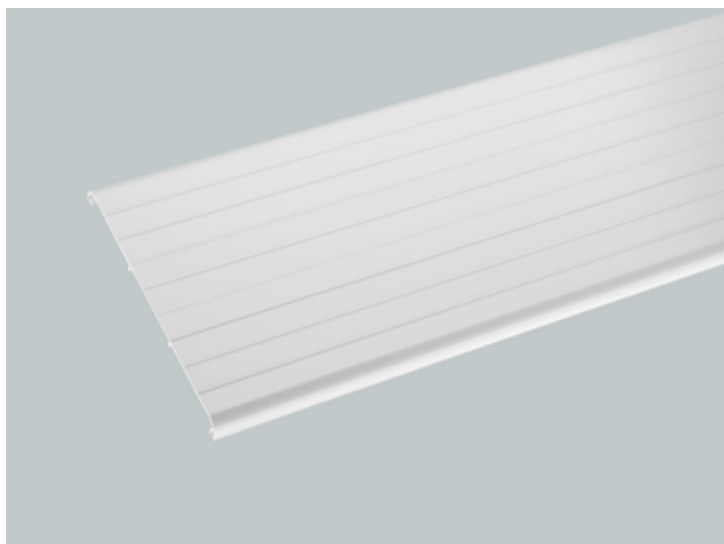

Descrizione

Articolo

Cod.art.: 01554

Profilo di protezione, 3p

frontale, lunghezza 1,10 m, per montaggio con 01136

3 x 190 x 1100

Montaggio

60Classic

Gruppo di prodotti 07

Sottogruppo merceologico 36

Pz / conf. 1

EAN 4021267015541

Catalog page 2018 : 3.4

eCl@ss 6.1 27370390
27370390
ETIM 4.0 EC002498
ETIM 5.0 EC002848

Certificazioni

Norme

IEC 61439-1:2011
IEC 60999-1:1999
IEC 60999-2:2003

Omologazioni

CSA , UL , Germanischer Lloyd



for UL feeder circuits >250V

Type No.: C60.1-L

UL file: E123577, UL category (for USA): NMTR <http://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR7 <http://www.ul.com>

CSA file: 110285, CSA class: 3211-37 <http://directories.csa-international.org>

Omologazione CCC : no certification required

Dati prodotto

Valori elettrici

short-circuit	not applicable, since the product does not contain or carry any live parts or
withstandbility:	is not stressed in the case of a short-circuit

Valori meccanici

L x H x P: 1100 x 190 x 3

Peso: 45.1 kg/100

Proprietà materiali

Corpo base: resistenza alle temperature fino a 70°C,
ignifugo secondo UL 94

Cover: temperature-resistant up to 75°C, self-releasing to UL 94, creepage current strength CTI 200, halogen-free