


## Profilo di protezione (01555)

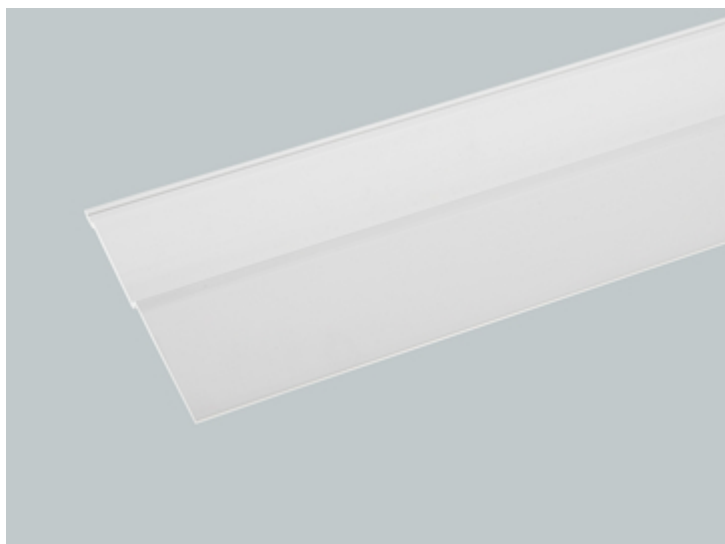

### Descrizione

#### Articolo

Cod.art.: 01555

Profilo di protezione

sup. / inf. , lunghezza 1,10 m, per montaggio con 01136 o 01137

3 x 109 x 1100

#### Montaggio

60Classic

Gruppo di prodotti 07

Sottogruppo merceologico 36

Pz / conf. 2

EAN 4021267015558

Catalog page 2018 : 3.4

eCl@ss 6.1 27370390  
27370390  
ETIM 4.0 EC002498  
ETIM 5.0 EC002848

## Certificazioni

### Norme

IEC 61439-1:2011  
IEC 60999-1:1999  
IEC 60999-2:2003

### Omologazioni

CSA , UL , Germanischer Lloyd



for UL feeder circuits >250V

Type No.: C60.2-L

UL file: E123577, UL category (for USA): NMTR <http://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR7 <http://www.ul.com>

CSA file: 110285, CSA class: 3211-37 <http://directories.csa-international.org>

Omologazione CCC : no certification required

## Dati prodotto

### Valori elettrici

|                  |                                                                               |
|------------------|-------------------------------------------------------------------------------|
| short-circuit    | not applicable, since the product does not contain or carry any live parts or |
| withstandbility: | is not stressed in the case of a short-circuit                                |

### Valori meccanici

L x H x P: 1100 x 109 x 3

Peso: 27.1 kg/100

### Proprietà materiali

Corpo base: resistenza alle temperature fino a 70°C,  
ignifugo secondo UL 94

Cover: temperature-resistant up to 75°C, self-releasing to UL 94, creepage current strength CTI 200, halogen-free