


Connessione longitudinale per barre 630 A (01990)

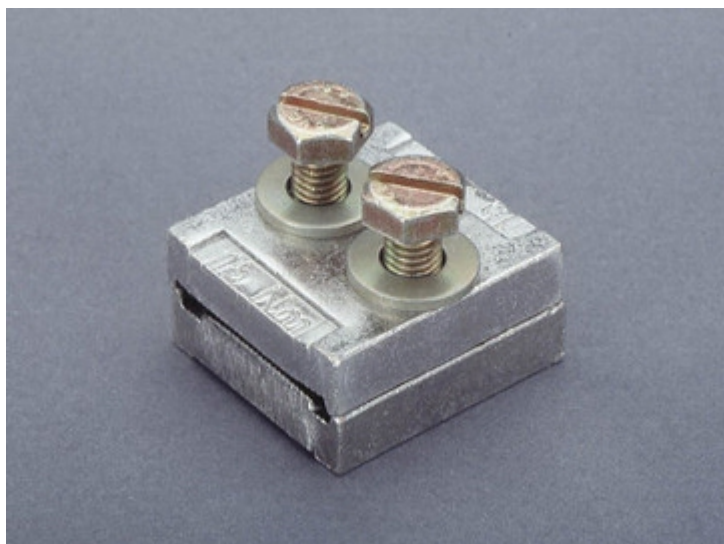

Descrizione

Articolo

Cod.art.: 01990

Connessione longitudinale per barre 630 A

lunghezza 40 mm

per barre 20, 25, 30 x 5, 10

Montaggio

60Classic

Gruppo di prodotti 07

Sottogruppo merceologico 33

Pz / conf. 6

EAN 4021267019907

Catalog page 2018 : 3.9

eCl@ss 6.1 27400606
27400606
ETIM 4.0 EC000713
ETIM 5.0 EC000713

Certificazioni

Norme

IEC 61439-1:2011

Omologazioni

UL , Germanischer Lloyd



for UL feeder circuits >250V

Type No.: LV30-L

UL file: E123577, UL category (for USA): NMTR <http://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR7 <http://www.ul.com>

Omologazione CCC : no certification required

Dati prodotto

Valori elettrici

Tensione nominale (IEC) AC: 690
V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 0.3 W.

(The power dissipation for operation with rated current would be 0.4 W.)

Utilizzabile fino a max. (IEC): 630 A

Tensione max. IEC AC: 1000
V

Tensione max. IEC DC: 1000
V

rated peak withstand current I_{pk} : 67.1 kA

SCCR: 25 kA

Valori meccanici

L x H x P: 40 x 37 x 20

Peso: 23.3 kg/100

per barre: 20, 25, 30 x 5, 10

2 clamp screws M8

tightening torque 15 Nm

permitted busbar displacement: 2

Distanza tra le 2 barre: 9 - 20 mm

Proprietà materiali

Viti: Hexagon screw M8, length across flats 13


Corpo del morsetto: Cu-ETP R300 (EN 13601), tinned

Terminal body: Cu section, nickel-plated, for bridging the system separation, screws: hexagonal screws M8 with slot, galvanised, chromited

Avvisi e consigli

Max. permitted busbar offset 2 mm, 3 units are needed for a 3-pole connection.

Accessori



01360

Separatori UL, kit per sist. 3p
per conn. longitudinali 01990, 01823, 01827
105 mm