


Base per fusibili NH 250 A, con tecnologia CrossLink®,
collegam. in basso o in alto (03301)

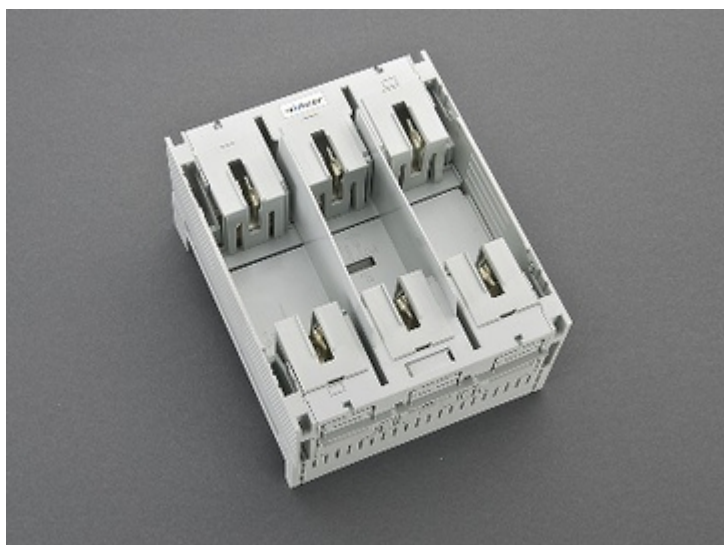

Descrizione

Articolo

Cod.art.: 03301

QUADRON® 60Classic

Base per fusibili NH 250 A, con tecnologia CrossLink®, collegam. in basso o in alto
vite M10

Gr. NH 1 / 3P

per barre 12, 15, 20, 25, 30 x 5, 10 e barre profilate

Montaggio

60Classic

Gruppo di prodotti 10

Sottogruppo merceologico 54

Pz / conf. 1

EAN 4021267033019

Vantaggi prodotto

CrossLink® adapter technology

Fast and safe conversion of the connection for top or bottom

Simple and safe clicking into place and making contact

Safe connection through shock protection split into two

Busbar supports for flat busbars can be mounted above each other

Catalog page 2018 : 3.22

eCl@ss 6.1 27142106

27142106

ETIM 4.0 EC000067

ETIM 5.0 EC000067

Certificazioni

Norme

IEC 60269-1:2006 + A1:2009 + A2:2014

IEC 60269-2:2013

Type No.: QCC-NH1

Dati prodotto

Valori elettrici

Corrente nominale (IEC): 250 A

Tensione nominale (IEC) AC: 690 V

Tensione nominale (IEC) DC: 440 V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 20.1 W.

(The power dissipation for operation with rated current would be 31.4 W.)

rated isolation voltage U_i : 800
V

Tensione di picco U_{imp} : 6 kV

Tensione max. IEC AC: 800
V

Tensione max. IEC DC: 800
V

breaking capacity with fuses: 80 kA

for fuse links IEC 60269-2 / DIN VDE 0636-2 size 1 up to 32W power dissipation

Adapter module, degree of protection IP20 at front

Valori meccanici

L x H x P: 184 x 210 x 132

Peso: 198.5 kg/100

Poli: 3 poli

per barre: 12, 15, 20, 25, 30 x 5, 10 e barre profilate

Conessioni

viti M10

Proprietà materiali

Corpo base: temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 600,
halogen-free

Contatti: spring-loaded copper contacts, silver plated

Protezione contro resistenza alle temperature fino a 125°C,
contatto ignifugo secondo UL 94,

accidentale: tenuta alle correnti di fuga CTI 200

Altre versioni


Variant with box terminals: 03 300

Accessori




03502

Maniglia di estrazione NH,
senza protezione mani
Gr. NH 000 - 3




33142

Copertura per capicorda, innestabile in alto / basso
per QCB / QCS-NH 1, QCS 320A
QCB-NH1, QCS-NH1, QCS 320 A




33145

Morsetto a prisma, doppio
2x 35-70 mm²
QCB-NH1, QCS-NH1, QCS 320 A




33163

Connessione a brida per cavi Cu
70 - 150 mm²
QCB-NH1, QCS-NH1, LTS-F 250, LTS 400



33166

Morsetto a prisma, per cavi Cu / Al
35 - 150 mm²
QCB-NH1, QCS-NH1, QCS 320 A



33909

Morsetto a gabbia
35 - 150 mm²
QCB-NH1, QCS-NH1, QCS 320 A



33916

Calottina per pinze fusibili NH della base CrossLink®

Gr. NH 1