


Base per fusibili NH 400 A, per pannello (03767)

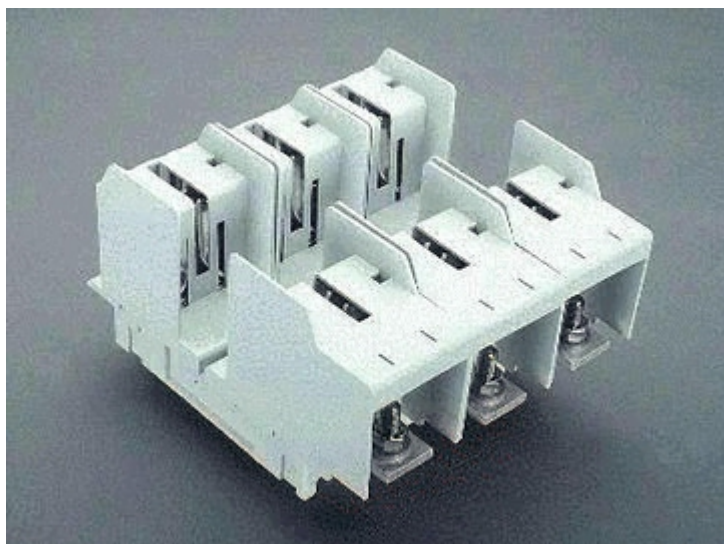

Descrizione

Articolo

Cod.art.: 03767

QUADRON® Panel

Base per fusibili NH 400 A, per pannello
vite M10 a entrambi lati

Gr. NH 2 / 3P, con protezione

Montaggio

Pannello / piastra di fondo

Gruppo di prodotti 10

Sottogruppo merceologico 21

Pz / conf. 1

EAN 4021267037673

Vantaggi prodotto

For safe connection of the leads, the shock protection is split into 6.

Catalog page 2018 : 6.11

eCl@ss 6.1 27142106

27142106

ETIM 4.0 EC000067

ETIM 5.0 EC000067

Certificazioni

Norme

IEC 60269-1:2006 + A1:2009 + A2:2014

IEC 60269-2:2013

Omologazioni

Germanischer Lloyd



Dati prodotto

Valori elettrici

Corrente nominale (IEC): 400 A

Tensione nominale (IEC) AC: 690 V

Tensione nominale (IEC) DC: 440 V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 23 W.

(The power dissipation for operation with rated current would be 36 W.)

rated isolation voltage U_i : 800

V

Tensione di picco U_{imp} : 6 kV

Tensione max. IEC AC: 800

V

Tensione max. IEC DC: 800

V

breaking capacity with fuses: 50 kA

for fuse links IEC 60269-2 / DIN VDE 0636-201 size 2 up to 45W power dissipation

Valori meccanici

L x H x P: 194 x 237 x 121

Peso: 288.3 kg/100

Poli: 3 poli

Connection screw (aluminium terminal can be retrofitted):
screw connection M10, 18 - 22Nm torque,
aluminium connection 2 x M8, cross-section 70 - 150mm²,
Cu - Al, 10Nm torque

Conessioni

NHUT_SCHRAUBE_M10

Proprietà materiali

Corpo base: temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 600,
halogen-free

Contatti: spring-loaded copper contacts, silver plated

Protezione contro
contatto
accidentale: temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 600,
halogen-free

Accessori



03163

Lama sezionatore 400 A
Gr. NH 2



03502

Maniglia di estrazione NH,
senza protezione mani
Gr. NH 000 - 3



03757

Neutro sezionabile, 400 A
vite M10 su due lati
lunghezza 200 mm



79449

Calottina per fusibili NH
per basi NH (non per basi QCC)
Gr. NH 1 - 3