


Base per fusibili NH 630 A, per pannello (03768)

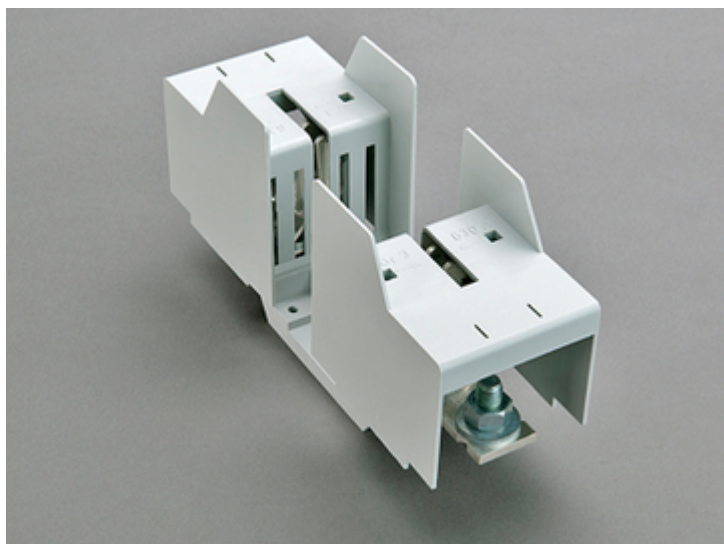

Descrizione

Articolo

Cod.art.: 03768

QUADRON® Panel

Base per fusibili NH 630 A, per pannello
vite M12 a entrambi lati

Gr. NH 3 / 1P, con protezione

Montaggio

Pannello / piastra di fondo

Gruppo di prodotti 10

Sottogruppo merceologico 12

Pz / conf. 3

EAN 4021267037680

Vantaggi prodotto

For safe connection of the leads, the shock protection is split into 2.

eCl@ss 6.1 27142106

27142106

ETIM 4.0 EC000067

ETIM 5.0 EC000067

Certificazioni

Norme

IEC 60269-1:2006 + A1:2009 + A2:2014

IEC 60269-2:2013

Omologazioni

Germanischer Lloyd



Dati prodotto

Valori elettrici

Corrente nominale (IEC): 630 A

Tensione nominale (IEC) AC: 690 V

Tensione nominale (IEC) DC: 440 V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 19.2 W.

(The power dissipation for operation with rated current would be 30 W.)

rated isolation voltage U_i : 800 V

Tensione di picco U_{imp} : 6 kV

Tensione max. IEC AC: 1000
V

Tensione max. IEC DC: 1000
V

breaking capacity with fuses: 50 kA

for fuse links IEC 60269-2 / DIN VDE 0636-201 size 3 up to 60W power dissipation

Valori meccanici

L x H x P: 80 x 247 x 134

Peso: 110.8 kg/100

Poli: 1 polo

Connection screw (aluminium terminal can be retrofitted):
screw connection M12, 28 - 32Nm torque,
aluminium connection 2 x M10, cross-section 95 - 240mm²,
Cu - Al, 16 - 20Nm torque


Conessioni

NHUT_SCHRAUBE_M12

Proprietà materiali

Corpo base:	temperature stability 125°C, self-extinguishing in acc. to UL 94, creepage resistance CTI 600, halogen-free
Contatti:	spring-loaded copper contacts, silver plated
Viti di collegamento:	screw M12, galvanized, chromized
Protezione contro contatto accidentale:	temperature stability 125°C, self-extinguishing in acc. to UL 94, creepage resistance CTI 600, halogen-free

Accessori



03164

Lama sezionatore 630 A
Gr. NH 3



03502

Maniglia di estrazione NH,
senza protezione mani
Gr. NH 000 - 3



03757

Neutro sezionabile, 400 A
vite M10 su due lati
lunghezza 200 mm



79449

Calottina per fusibili NH
per basi NH (non per basi QCC)
Gr. NH 1 - 3