


## Base sezion. per fusibili cilindr. (31296)

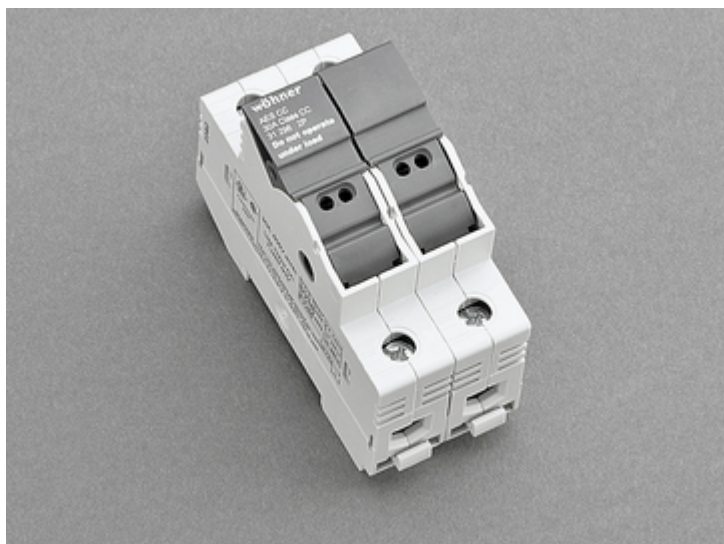

### Descrizione

#### Articolo

Cod.art.: 31296

AMBUS® Panel

Base sezion. per fusibili cilindr.

Class CC / 2P

30 A / 600 V

#### Montaggio

Guida DIN

Gruppo di prodotti 17

Sottogruppo merceologico 07

Pz / conf. 6

EAN 4021267312961

## Vantaggi prodotto

large clamping range, also for two identical conductors (adjacent)  
holder for label

Catalog page 2018 : 6.9

eCl@ss 6.1 27142190

27142190

ETIM 4.0 EC002705

ETIM 5.0 EC002705

## Certificazioni

### Norme

UL 4248-1 Ed. 1

UL 4248-4 Ed. 1

### Omologazioni

CSA , UL



for UL feeder circuits >250V

Type No.: AESCC

UL file: E230163, UL category (for USA): IZLT <http://www.ul.com>

UL file: E230163, UL category (for Canada): IZLT7 <http://www.ul.com>

CSA file: 110285, CSA class: 6225-01 <http://directories.csa-international.org>

## Dati prodotto

### Valori elettrici

Corrente nominale (IEC): 30 A

Tensione nominale (IEC) AC: 600  
V

Tensione nominale (IEC) DC: 600  
V

Rated current (UL): 30 A  
Rated voltage (UL) AC: 600  
V  
Rated voltage (UL) DC: 600  
V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 0.4 W.  
(The power dissipation for operation with rated current would be 0.6 W.)

Tensione max. IEC AC: 600  
V  
Tensione max. IEC DC: 600  
V

SCCR: 200 kA

for Class CC fuses as per UL 248-4

#### **Valori meccanici**

L x H x P: 36 x 81 x 58  
Peso: 11.3 kg/100  
Poli: 2 poli

degree of protection: IP20  
front degree of protection: IP20

## Conessioni

for applications acc. to IEC / EN :

1 wire :

Cu 0,75 - 25 mm<sup>2</sup>

2 wires (of same cross-section) :

Cu 0,75 - 10 mm<sup>2</sup>

flexible cables, directly or with wire-end ferrule

(flexible cables of max. cross-section may not fit when using wire-end ferrule)

Md 2,0 - 2,5 Nm / 18 - 22 lb.in.

for applications acc. to UL / CSA :

only Cu cables acc. to UL 486E 60°C/75°C

1 wire :

AWG 18 - AWG 8, Class B, Md 2,0 - 2,5 Nm / 18 - 22 lb.in.

AWG 6 - AWG 4, Class C, Md 2,5 - 3,0 Nm / 22 - 26 lb.in.

2 wires (of identical cross-section) :

AWG 18 - AWG 8, Class B, Md 2,0 - 2,5 Nm / 18 - 22 lb.in.

AWG 6, Class C, Md 2,0 - 2,5 Nm / 18 - 22 lb.in.

## Proprietà materiali

Corpo base: temperature stability 125°C,  
self-extinguishing in acc. to UL 94,  
creepage resistance CTI 600,  
halogen-free

Portafusibile: temperature stability 125°C,  
self-extinguishing in acc. to UL 94,  
creepage resistance CTI 600,  
halogen-free

Viti di collegamento: screw +/- (PZ2), galvanized, chromized

## Altre versioni

Version with indicator light: Part no. 31299

## Accessori




### **31939**

Targhette per AES

100 per 10 pz.

**disponibile solo fino ad esaurimento scorte**



### **31561**

Barra a pettine, 2 poli, passo 18 mm

100 A, lunghezza 1 m

25 mm<sup>2</sup>