


Base sezion. per fusibili, montaggio su barre, con LED (31955)

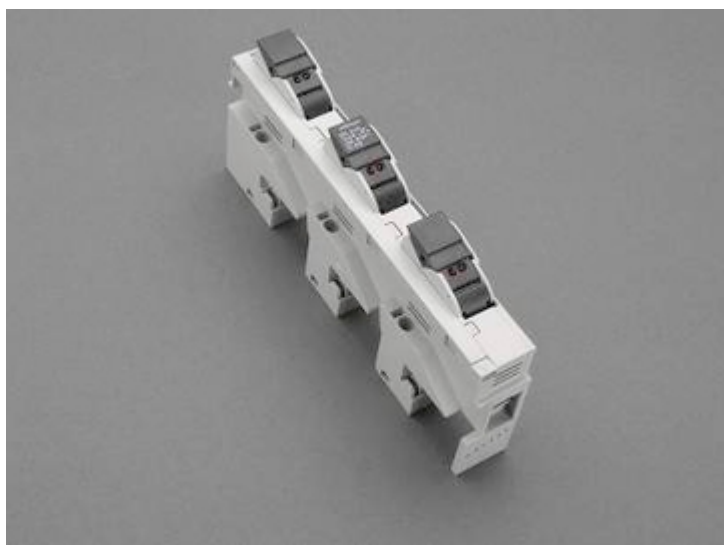

Descrizione

Articolo

Cod.art.: 31955

AMBUS[®] 60Classic

Base sezion. per fusibili, montaggio su barre, con LED

per fusibili cilind. 10x38 sec. IEC 60269-2, con LED 110 - 690 V AC/DC

10 x 38 / 3P

per barre 12, 15, 20, 25, 30 x 5, 10 e barre profilate

Montaggio

60Classic

Gruppo di prodotti 01

Sottogruppo merceologico 46

Pz / conf. 4

EAN 4021267319557

eCl@ss 6.1 27142190

27142190

ETIM 4.0 EC002705

ETIM 5.0 EC002705

Certificazioni

Norme

IEC 60947-1:2007 + A1:2010 + A2:2014

IEC 60947-3:2008 + A1:2012 + A2:2015

Omologazioni

IEC (CB) , CSA , UL , VDE



for UL feeder circuits >250V

Type No.: AEL10x38

UL file: E230163, UL category (for USA): IZLT2 <http://www.ul.com>

UL file: E230163, UL category (for Canada): IZLT8 <http://www.ul.com>

CSA file: 110285, CSA class: 3211-37 <http://directories.csa-international.org>

Dati prodotto

Valori elettrici

Corrente nominale (IEC): 32 A

Tensione nominale (IEC) AC: 690
V

Tensione nominale (IEC) DC: 600
V

Rated current (UL): 30 A

Rated voltage (UL) AC: 600
V

Rated voltage (UL) DC: 600
V

Categoria d'impiego AC: AC-22B (500V)
AC-21B (690V)

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 0.6 W.
(The power dissipation for operation with rated current would be 1 W.)

Tensione di picco Uimp: 6 kV

Tensione max. IEC AC: 700
V

Tensione max. IEC DC: 700
V

cond. rated short-circuit current with fuses: 100 kA / 500 V AC
(25A)

approved with fuse links of characteristics: gG

SCCR: 50 kA

LED signalisiert eine ausgefallene Sicherung Arbeitsbereich : 110 - 690 V AC / DC

for fuse links as per IEC / EN 60269-2 (gG, max. 3W)

Valori meccanici

L x H x P: 27 x 200 x 104

Peso: 18.7 kg/100

Poli: 3 poli

per barre: 12, 15, 20, 25, 30 x 5, 10 e barre profilate

Type of fastening: patented click mechanism

Conessioni

nach IEC: Cu 1.5 ... 6 mm² (f, re)

nach UL /CSA: AWG 16 ... AWG 10 (str)

Proprietà materiali

- Involucro: temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 600,
halogen-free
- Portafusibile: temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 600,
halogen-free
- Copertura: temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 600,
halogen-free