


Base sezion. per fusibili, montaggio su barre, con LED (31964)

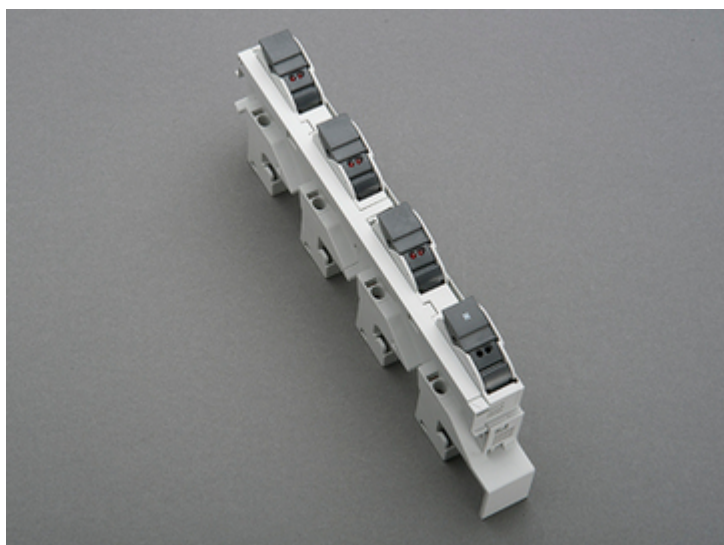

Descrizione

Articolo

Cod.art.: 31964

AMBUS® 60Classic

Base sezion. per fusibili, montaggio su barre, con LED

per fusibili cilind. 10x38 sec. IEC 60269-2, con LED 110 - 690 V AC/DC

10 x 38 / 4P

per barre 12, 15, 20, 25, 30 x 5, 10 e barre profilate

Montaggio

60Classic

Gruppo di prodotti 01

Sottogruppo merceologico 46

Pz / conf. 4

EAN 4021267319649

eCl@ss 6.1 27142190

27142190

ETIM 4.0 EC002705

ETIM 5.0 EC002705

Certificazioni

Norme

IEC 60947-1:2007 + A1:2010 + A2:2014

IEC 60947-3:2008 + A1:2012 + A2:2015

Omologazioni

IEC (CB) , VDE



Type No.: AEL10x38

Dati prodotto

Valori elettrici

Corrente nominale (IEC): 32 A

Tensione nominale (IEC) AC: 690
V

Tensione nominale (IEC) DC: 600
V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 0.6 W.

(The power dissipation for operation with rated current would be 1 W.)

Tensione di picco Uimp: 6 kV

Tensione max. IEC AC: 700
V

Tensione max. IEC DC: 700
V

cond. rated short-circuit current with fuses: 100 kA / 500 V AC
(25A)
approved with fuse links of characteristics: gG

LED indicates blown fuse, operating range: 110 - 690V AC / DC

für Sicherungseinsätze nach IEC / EN 60269-2 (gG, max. 3W)

Valori meccanici

L x H x P: 27 x 200 x 104
Peso: 25.2 kg/100
Poli: 3 poli
per barre: 12, 15, 20, 25, 30 x 5, 10 e barre profilate

Type of fastening: patented click mechanism

Conessioni

nach IEC: Cu 1.5 ... 6 mm² (f, re)
nach UL /CSA: AWG 16 ... AWG 10 (str)

Proprietà materiali

Involucro: temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 600,
halogen-free
Portafusibile: temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 600,
halogen-free
Copertura: temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 600,
halogen-free