


Adattatore 160 A speciale, 3p (32020)

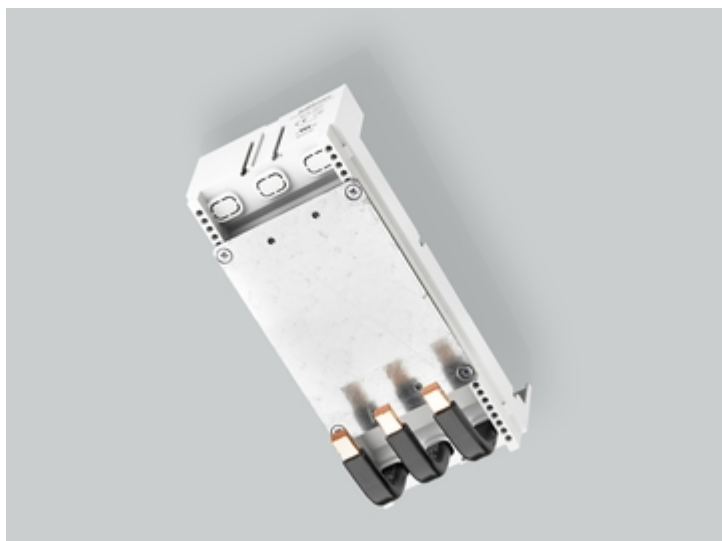

Descrizione

Articolo

Cod.art.: 32020

EQUES® 60Classic

Adattatore 160 A speciale, 3p

per ABB T-max T1, XT1, XT2, Allen-Bradley 140G-G e H,

per interruttori con morsetti per barre fless.

collegam. al sistema in basso

90 x 200

per barre 12, 15, 20, 25, 30 x 5, 10 e barre profilate

Montaggio

60Classic

Gruppo di prodotti 05

Sottogruppo merceologico 30

Pz / conf. 1

EAN 4021267320201

Catalog page 2018 : 3.14

eCl@ss 6.1 27370304
27370304

ETIM 4.0 EC001531

ETIM 5.0 EC001531

Certificazioni

Norme

IEC 61439-1:2011

Omologazioni

CSA , UL



for UL feeder circuits >250V

Type No.: EPC60160

UL file: E123577, UL category (for USA): NMTR2 <http://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR8 <http://www.ul.com>

CSA file: 110285, CSA class: 3211-37 <http://directories.csa-international.org>

Omologazione CCC : no certification required

Dati prodotto

Valori elettrici

Corrente nominale (IEC): 160 A

Tensione nominale (IEC) AC: 690 V

Rated current (UL): 160 A

Rated voltage (UL) AC: 600 V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 7.7 W.

(The power dissipation for operation with rated current would be 12 W.)

rated isolation voltage U_i : 800

V

Tensione di picco U_{imp} : 6 kV

Tensione max. IEC AC: 800

V

Tensione max. IEC DC: 800

V

short-circuit
withstandability: the short-circuit capacity of the combination of adapter and MCCB
depends on the MCCB

SCCR: 35kA @ circuit breaker DIVQ/7 125A, 480Vac

Valori meccanici

L x H x P: 90 x 200 x 26

Peso: 81 kg/100

Poli: 3 poli

per barre: 12, 15, 20, 25, 30 x 5, 10 e barre profilate

Proprietà materiali

Involucro: temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 600,
halogen-free

Conductor insulation: PVC, temperature-resistant up to 105 °C