


Adattatore 200 A, universale, 3p (32214)

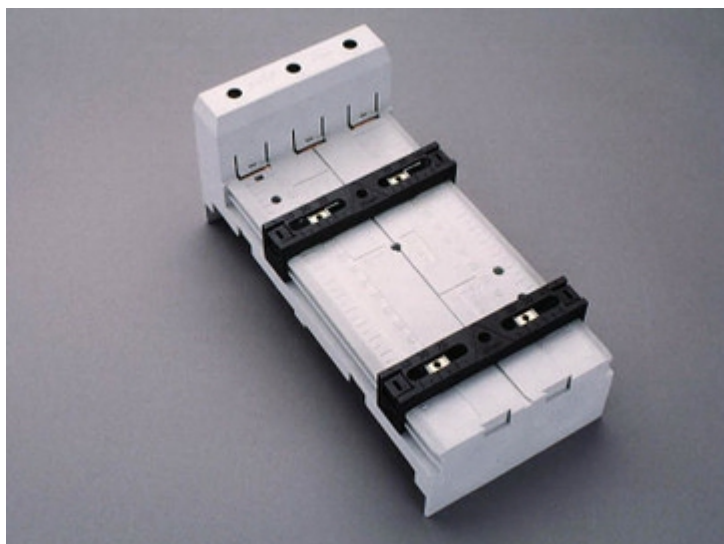

Descrizione

Articolo

Cod.art.: 32214

EQUES® 60Classic

Adattatore 200 A, universale, 3p

morsetti 70 mm² in alto

108 x 222

per barre 12, 15, 20, 25, 30 x 5, 10 e barre profilate

Montaggio

60Classic

Gruppo di prodotti 05

Sottogruppo merceologico 36

Pz / conf. 1

EAN 4021267322144

Catalog page 2018 : 3.14

eCl@ss 6.1 27370304
27370304
ETIM 4.0 EC001531
ETIM 5.0 EC001531

Certificazioni

Norme

IEC 61439-1:2011

Omologazioni

CSA , UL , Germanischer Lloyd



Type No.: 60200

UL file: E123577, UL category (for USA): NMTR2 <http://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR8 <http://www.ul.com>

CSA file: 110285, CSA class: 3211-37 <http://directories.csa-international.org>

Omologazione CCC : no certification required

Dati prodotto

Valori elettrici

Corrente nominale (IEC): 200 A

Tensione nominale (IEC) AC: 690 V

Rated current (UL): 200 A

Rated voltage (UL) AC: 600 V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 10.6 W.

(The power dissipation for operation with rated current would be 16.6 W.)

rated isolation voltage U_i : 800
V
Tensione di picco U_{imp} : 6 kV
Tensione max. IEC AC: 800
V
Tensione max. IEC DC: 800
V

rated peak withstand current I_{pk} : 46.9 kA

Valori meccanici

L x H x P: 108 x 222 x 39
Peso: 84.2 kg/100
Poli: 3 poli
per barre: 12, 15, 20, 25, 30 x 5, 10 e barre profilate


Proprietà materiali

Involucro: temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 600,
halogen-free

Avvisi e consigli

Movable fastening rails with M4 slide nuts for safe mounting of the switching devices.

Accessori



32937

Inserto di fissaggio M5
per 32168, 32214, 32215, 32216