


Adattatore EEC 25 A (32430)

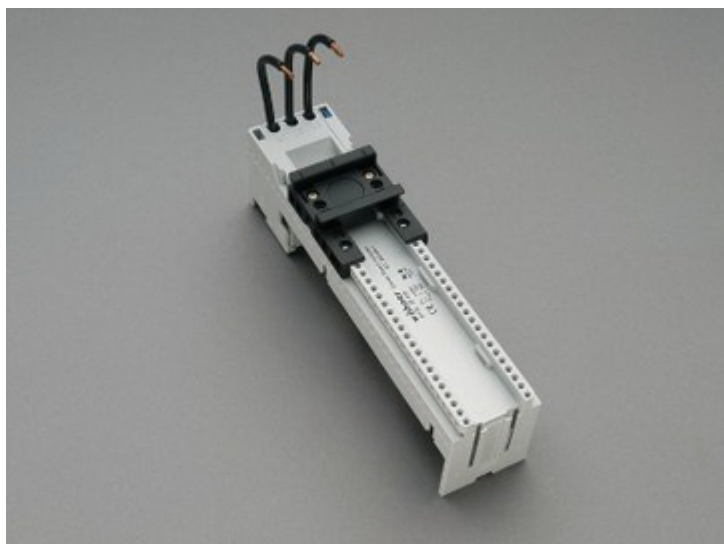

Descrizione

Articolo

Cod.art.: 32430

EQUES® 60Classic

Adattatore EEC 25 A

con 2 guide DIN scorrevoli

45 x 200, con cavi AWG 12 (4 mm²)

per barre 12, 15, 20, 25, 30 x 5, 10 e barre profilate

Montaggio

60Classic

Gruppo di prodotti 05

Sottogruppo merceologico 21

Pz / conf. 4

EAN 4021267324308

Vantaggi prodotto

Conductor ends ultrasonically sealed.

Click mechanism when pushing onto the busbar.

Catalog page 2018 : 3.11

eCl@ss 6.1 27370304

27370304

ETIM 4.0 EC001531

ETIM 5.0 EC001531

Certificazioni

Norme

IEC 61439-1:2011

Omologazioni

CSA , UL , Germanischer Lloyd



for UL feeder circuits >250V

Type No.: EEC6025-L

UL file: E123577, UL category (for USA): NMTR <http://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR7 <http://www.ul.com>

CSA file: 110285, CSA class: 3211-37 <http://directories.csa-international.org>

Omologazione CCC : no certification required

Dati prodotto

Valori elettrici

Corrente nominale (IEC): 25 A

Tensione nominale (IEC) AC: 690
V

Rated current (UL): 25 A

Rated voltage (UL) AC: 600
V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 1.2 W.

(The power dissipation for operation with rated current would be 1.9 W.)

rated isolation voltage U_i : 800

V

Tensione di picco U_{imp} : 6 kV

Tensione max. IEC AC: 800

V

Tensione max. IEC DC: 800

V

short-circuit withstandability: the short-circuit capacity of the combination of adapter and motor starter depends on the motor starter

SCCR: 30kA @ Comb. Mtr. Cntlr. NKJH 12,5A, 600Vac

50kA @ Comb. Mtr. Cntlr. NKJH 32A, 480Vac

65kA @ Comb. Mtr. Cntlr. NKJH 16A, 480Vac

65kA @ Comb. Mtr. Cntlr. NKJH 25A, 480Vac

Valori meccanici

L x H x P: 45 x 200 x 63

Peso: 32.5 kg/100

Poli: 3 poli

per barre: 12, 15, 20, 25, 30 x 5, 10 e barre profilate

Proprietà materiali

Involucro: temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 600,
halogen-free

Guida: temperature stability 125°C,
DIN: self-extinguishing in acc. to UL 94,
creepage resistance CTI 550,
halogen-free


Viti: screw +/- (PZ1), galvanized, chromized

Conductor insulation: temperature-resistant up to 105 °C

Avvisi e consigli


For compact mounting of complete motor circuits with commercially available switchgear and safe mechanical and electrical connection to the busbar system.

Accessori




32511

Connettore plug-in per EQUES, 8p, 250V




32947

Guida DIN, 45 mm
per adattatori EEC/ EMC



32969

Bloccaggio laterale per guide DIN



32963

Modulo laterale per adattatori EEC
per entrambi i lati
9 x 200