


Adattatore EEC 32 A (32487)

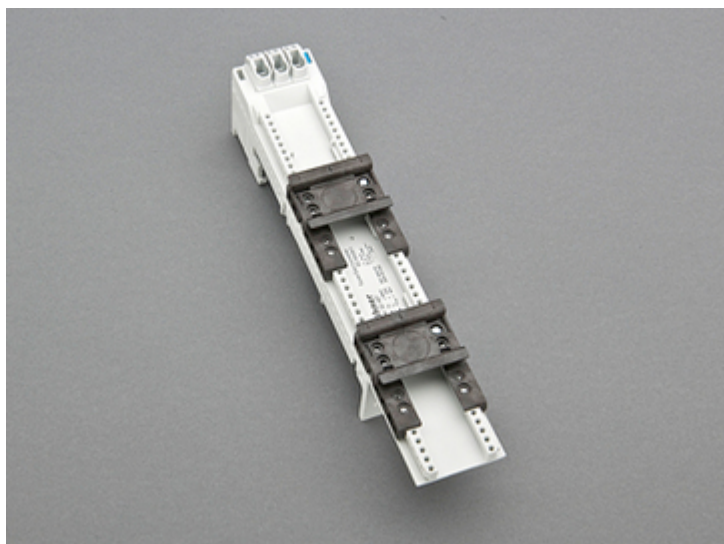

Descrizione

Articolo

Cod.art.: 32487

EQUES® 60Classic

Adattatore EEC 32 A

con 2 guide DIN scorrevoli

45 x 260, con morsetti 1,5 - 6 mm² accessibili dal fronte
per barre 12, 15, 20, 25, 30 x 5, 10 e barre profilate

Montaggio

60Classic

Gruppo di prodotti 05

Sottogruppo merceologico 21

Pz / conf. 4

EAN 4021267324872

Vantaggi prodotto

Free phase selection.

Click mechanism when pushing onto the busbar.

Catalog page 2018 : 3.12

eCl@ss 6.1 27370304

27370304

ETIM 4.0 EC001531

ETIM 5.0 EC001531

Certificazioni

Norme

IEC 61439-1:2011

Omologazione CCC : no certification required

Dati prodotto

Valori elettrici

Corrente nominale (IEC): 32 A

Tensione nominale (IEC) AC: 690
V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 1.6 W.

(The power dissipation for operation with rated current would be 2.5 W.)

Tensione max. IEC AC: 800

V

Tensione max. IEC DC: 800

V

short-circuit the short-circuit capacity of the combination of adapter and motor starter
withstandbility: depends on the motor starter

Valori meccanici

L x H x P: 45 x 260 x 63
Peso: 35.5 kg/100
Poli: 3 poli
per barre: 12, 15, 20, 25, 30 x 5, 10 e barre profilate


Conessioni

1.5 - 6 mm² re, rm, f, f+AE

Proprietà materiali


Involucro: temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 600,
halogen-free
Guida: temperature stability 125°C,
DIN: self-extinguishing in acc. to UL 94,
creepage resistance CTI 550,
halogen-free
Viti: screw +/- (PZ1), galvanized, chromized

Accessori




32947

Guida DIN, 45 mm
per adattatori EEC/ EMC



32969

Bloccaggio laterale per guide DIN



32963

Modulo laterale per adattatori EEC
per entrambi i lati
9 x 200



32907

Cavo AWG10 (6mm²), lungh. 130 mm



32921

Cavo 2.5 mm² (AWG 14), lunghezza 105 mm