


Adattatore 160 A speciale, 3p, con tecnologia CrossLink® (32570)

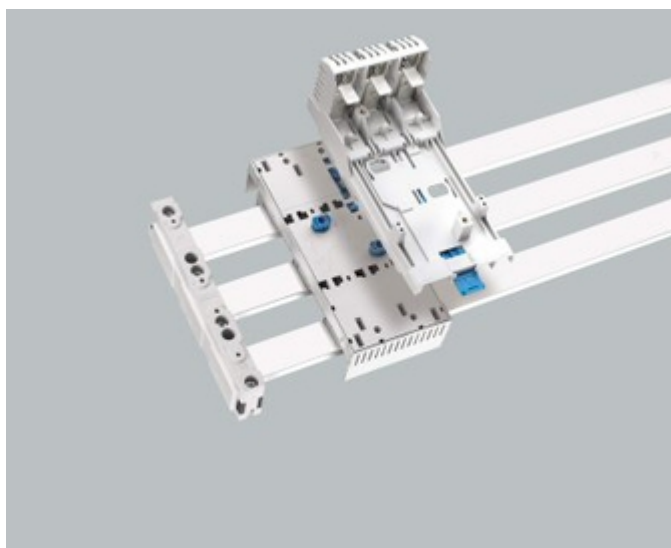

Descrizione

Articolo

Cod.art.: 32570

EQUES® 60Classic

Adattatore 160 A speciale, 3p, con tecnologia CrossLink®

per Eaton NZM1, collegam. al sistema in alto o basso

92 x 200

per barre 12, 15, 20, 25, 30 x 5, 10 e barre profilate

Montaggio

60Classic

Gruppo di prodotti 05

Sottogruppo merceologico 30

Pz / conf. 1

EAN 4021267325701

Catalog page 2018 : 3.14

eCl@ss 6.1 27370304
27370304

ETIM 4.0 EC001531

ETIM 5.0 EC001531

Certificazioni

Norme

IEC 61439-1:2011

Omologazioni

UL



for UL feeder circuits >250V

Type No.: ECL60160-L

UL file: E353754, UL category (for USA): DHWZ <http://www.ul.com>

UL file: E353754, UL category (for Canada): DIHS7 <http://www.ul.com>

Omologazione CCC : no certification required

Dati prodotto

Valori elettrici

Corrente nominale (IEC): 160 A

Tensione nominale (IEC) AC: 690 V

Rated current (UL): 160 A

Rated voltage (UL) AC: 600 V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 11.3 W.

(The power dissipation for operation with rated current would be 17.7 W.)

rated isolation voltage U_i : 800

V

Tensione di picco U_{imp} : 6 kV

Tensione max. IEC AC: 800

V

Tensione max. IEC DC: 800

V

let-through current I_d : 20kA @ NZMN1_125A 35kA / 480V

short-circuit the short-circuit capacity of the combination of adapter and MCCB

withstandability: depends on the MCCB

SCCR: 35 kA @ NZMN1_125A 480V

Valori meccanici

L x H x P: 92 x 200 x 38

Peso: 81 kg/100

Poli: 3 poli

per barre: 12, 15, 20, 25, 30 x 5, 10 e barre profilate

Proprietà materiali

Involucro: temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 600,
halogen-free

Conductor insulation: PVC, temperature-resistant up to 105 °C