


Base per fusibili class J, per barre, connessione in basso /alto (33402)

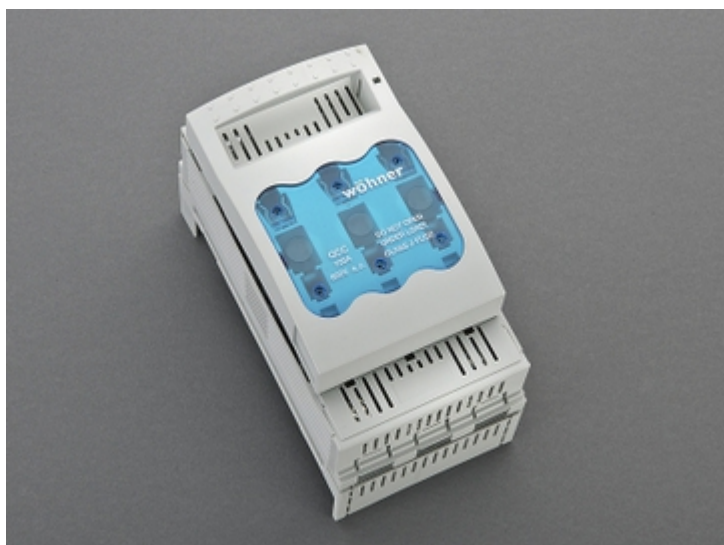

Descrizione

Articolo

Cod.art.: 33402

QUADRON® 60Classic

Base per fusibili class J, per barre, connessione in basso /alto
per fusibili class J, 70 - 100 A (29 per 117)

3p, con morsetto a gabbia

per barre 12, 15, 20, 25, 30 x 5, 10 e barre profilate

Montaggio

60Classic

Gruppo di prodotti 16

Sottogruppo merceologico 27

Pz / conf. 1

EAN 4021267334024

Vantaggi prodotto

the product is based on the UL approval in category IZLT2 also listed in category NMTR (file E123577)

CrossLink® adapter technology

Fast and safe conversion of the connection for top or bottom; the parts under voltage remain shock protected Simple and safe clicking into place and making contact

Safe connection through shock protection split into 2

Busbar supports for flat busbars can be mounted above each other

Catalog page 2018 : 3.21

eCl@ss 6.1 27142190

27142190

ETIM 4.0 EC002705

ETIM 5.0 EC002705

Certificazioni

Norme

UL 4248-1 Ed. 1

UL 4248-8 Ed. 1

Omologazioni

UL



for UL feeder circuits >250V

Type No.: QCC-ClassJ100A

UL file: E230163, UL category (for USA): IZLT2 <http://www.ul.com>

UL file 2: E123577, UL category+ (for USA): NMTR <http://www.ul.com>

UL file: E230163, UL category (for Canada): IZLT8 <http://www.ul.com>

UL file 2: E123577, UL category+ (for Canada): NMTR7 <http://www.ul.com>

Dati prodotto

Valori elettrici

Corrente nominale (IEC): 100 A

Tensione nominale (IEC) AC: 600 V

Rated current (UL): 100 A
Rated voltage (UL) AC: 600 V
Rated voltage (UL) DC: 600 V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 5.8 W.
(The power dissipation for operation with rated current would be 9 W.)

Tensione max. IEC AC: 600
V
Tensione max. IEC DC: 600
V

SCCR: 200 kA

Special operating conditions corresponding to IEC / EN 61439-1 may yield to faulty activations of pilot switches and fuse monitors. The operating conditions have to be considered for the analysis of status signals.

for Class J fuses 70 - 100A as per UL 248-8 (29x118)
do not use any fuse links with sharp-edged contact blades

System component: degree of protection IP30 at front as per DIN EN 60529, degree of protection near terminal depends on installation
adapter module: front side degree of protection IP20 as per DIN EN 60529 (finger-safe)

Valori meccanici

L x H x P: 106 x 200 x 135
Peso: 129 kg/100
Poli: 3 poli
per barre: 12, 15, 20, 25, 30 x 5, 10 e barre profilate

Busbar connector: externally tensioned contacting, convenient click mechanism, simple conversion of the combination bases from 5 to 10mm-thick busbars

Connessioni

AWG 12 - AWG 2/0 stranded, equivalent 3,3 - 67,4 mm²
AWG 14 - AWG 10 solid, equivalent 215 - 5,3 mm²

Proprietà materiali

Corpo base:	temperature stability 125°C, self-extinguishing in acc. to UL 94, creepage resistance CTI 600, halogen-free
Piastra adattatore:	temperature stability 125°C, self-extinguishing in acc. to UL 94, creepage resistance CTI 600, halogen-free
Coperchio:	resistenza alle temperature fino a 125°C, ignifugo secondo UL 94, tenuta alle correnti di fuga CTI 200

Altre versioni

Version for mounting plate: Part no. 33408