


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	TAB SIZE	WIRE RANGE		HOUSING COLOR	MAX. WIRE INSUL. DIA.	DIMENSIONS in. [mm]			TOOL CHART	
		ENGLISH	METRIC			L ± .03 [0,8]	W ± .02 [0,5]	H ± .02 [0,5]	PRESS	
									CP-871, UC200, UC100	CP-871, UC200
*APPLICATORS									CA9	CA-800-EZ
									DIES	
DV10-250C	.250 X .032 [6,4 X 0,8]	12-10	4,0-6,0	YELLOW	.23 [5,8]	.95 [24,1]	.29 [7,4]	.12 [3,1]	CD9-3B	CD-800-3

\*APPLICATOR FOOTPRINT MAY BE COMPATIBLE WITH OTHER COMMON PRESSES OR WIRE PROCESSING MACHINES

NOTES:

- USED FOR:
  - STRANDED COPPER WIRE ONLY
  - 221°F [105°C] MAX. OPERATING TEMPERATURE
  - 600 V. MAX. VOLTAGE RATING
- MATERIAL:
  - STAMPING: CDA-260 BRASS, TIN PLATED
  - HOUSING: VINYL
  - SLEEVE: BRASS
- WIRE STRIP LENGTH:  $11/32 \pm 1/32 [8,7 \pm 0,8]$
- SEE [www.panduit.com](http://www.panduit.com) FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

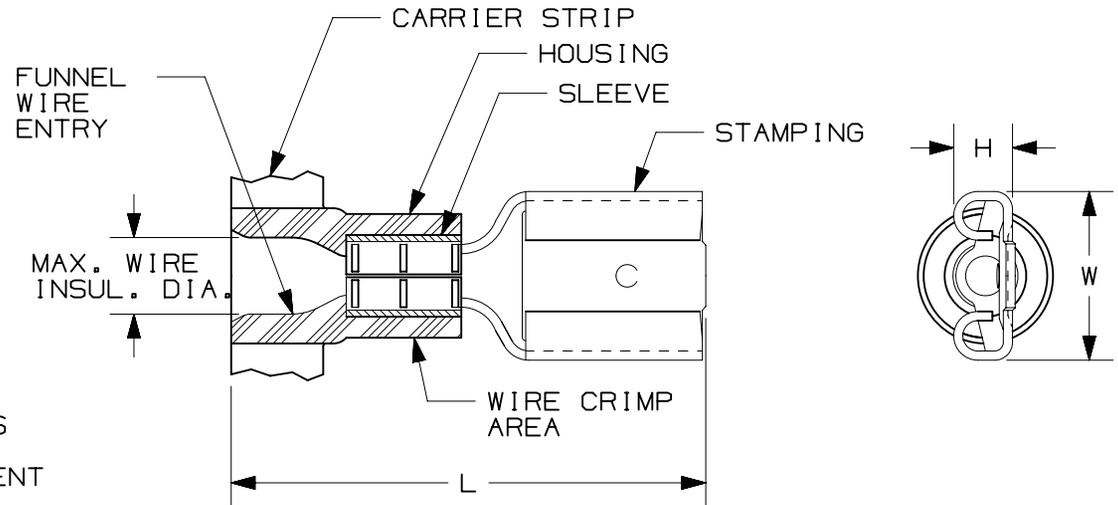

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
06	3.8.21	JHNU	JADE	JADE	REMOVED CP-861, CP-862 ADDED UC200 FORMATTED TOOL CHART	098711
05	1.27.21	JHNU	JADE	JADE	REMOVED RU AND CSA LOGOS	094131
04	10.22.12	JBN	LSM	VMB	ADDED METRIC EQUIVALENT. REVISED NOTES. UPDATED DRAWING TO CURRENT STANDARDS.	A41654

TITLE <b>DISCO™ FEMALE DISCONNECTS, VINYL BARREL INSULATED, FUNNEL ENTRY</b> CUSTOMER DRAWING			
ITEM REVISION NAME N41654BA/06		<b>PANDUIT</b>	
DATASET FILE NAME N41654BA_DC/06A			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL: SEE NOTES	
.x ± .1 [ 2.54 ]      .xxx ± .005 [ .127 ] .xx ± .01 [ .25 ]      ANGLES ± 5 °		DRAWING NUMBER: <b>A41654</b>	
THIRD ANGLE PROJECTION		SHEET 1 OF 1	
DRAWN BY JKD	DATE -	CHK -	SCALE N.T.S.
		SIZE A	

D10100DA/12