

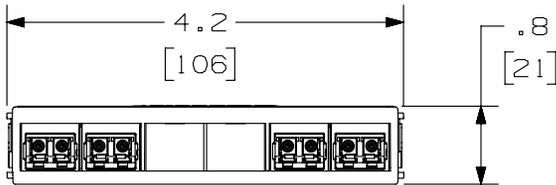


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

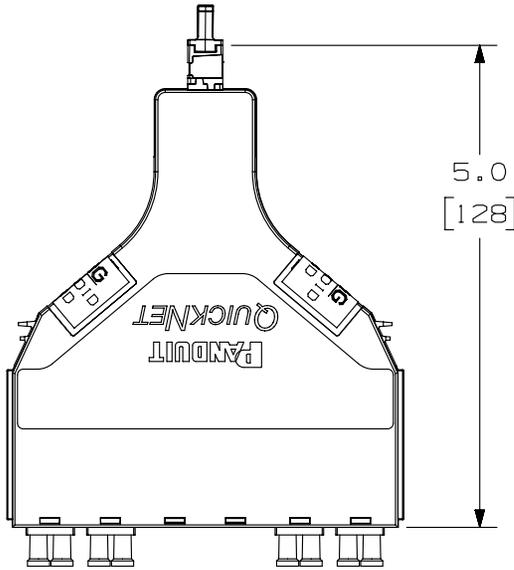

DUPLEX LC PORTS → 1 2 3 4
VIEW SHOWN WITHOUT DUSTCAPS

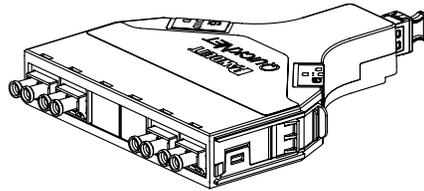

PANDUIT PART NUMBER	FIBER TYPE	PERFORMANCE LEVEL	MPO CONNECTIVITY	
			GENDER & POLISH	ADAPTER TYPE
FQ3XN-08-10NMBN	OM3	STANDARD LOSS	MALE (PINNED) -PC	TYPE B KEY-UP TO KEY-UP
FQ3XO-08-10NMBN	OM3	OPTIMIZED LOSS		
FQ3ZN-08-10NMBN	OM4	STANDARD LOSS		
FQ3ZO-08-10NMBN	OM4	OPTIMIZED LOSS		
FQ39N-08-10NMAN	OS2	STANDARD LOSS	MALE (PINNED) -APC	TYPE A KEY-UP TO KEY-DOWN

NOTES:

- SEE CURRENT CATALOG FOR PART NUMBER SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITIES.
- SEE CATALOG FOR A COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
- MATERIALS:
A. MODULE MATERIAL: PLASTIC
B. ADAPTER: COMPOSITE PLASTIC
- CASSETTE MODULE WEIGHT: 2.4oz [69.0g]
- DIMENSIONS IN BRACKETS ARE METRIC
- ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2011/65/EC ON THE RESTRICTIONS OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE	MATERIAL:	DRAWING NUMBER:	SIZE	
01	05-13-14	SAT	BSN	CHDE	RELEASED TO PRODUCTION	13F244AA-DC	QUICKNET SFQ SERIES CASSETTE, 40G-10G DUPLEX LC TO MPO MIGRATION CASSETTE CUSTOMER DRAWING	SEE NOTE 3	13F244AA-DC	A	
							ITEM REVISION NAME 13F244AA/00	PANDUIT			
							DATASET FILE NAME 13F244AA_DC/00B				
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .xxx ± .010 [0.3] .xx ± .03 [0.8] ANGLES ±				
							THIRD ANGLE PROJECTION				
							DRAWN BY SAT	DATE 02-14-14	CHK BSN	SCALE 1:2	SHT 1 OF 1