


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. APPLICATION TOOLS - GS4MT-E, PPTMT, ST2MT, HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 125 LBS [556 NEWTONS]
WHEN TESTED ON A 1.5" MANDREL
3. BRACKETS [] DENOTES DIMENSIONS IN MILLIMETERS
4. TOLERANCES:
.XXX = $\pm .010$ [.25] .XX = $\pm .02$ [.5]
.X = $\pm .03$ [.8] ANGLES = $\pm 2^\circ$
5. MATERIAL: 304 STAINLESS STEEL

PANDUIT PART NO.	MAX BUNDLE DIAMETER	PACKAGE QTY	LENGTH L = $\pm .3$ [7]
IMLT25S-C	1" [25]	100	5.0" [127]
IMLT51S-C	2" [51]	100	7.9" [201]
IMLT69S-C	2.7" [69]	100	10.2" [259]
IMLT102S-C	4" [102]	100	14.3" [362]
IMLT152S-C	6" [152]	100	20.5" [521]
IMLT203S-C	8" [203]	100	26.8" [679]
IMLT254S-C	10" [254]	100	33.0" [838]
IMLT304S-Q	12" [304]	25	39.3" [998]
IMLT355S-Q	14" [355]	25	45.5" [1156]
IMLT380S-Q	15" [380]	25	49.2" [1250]

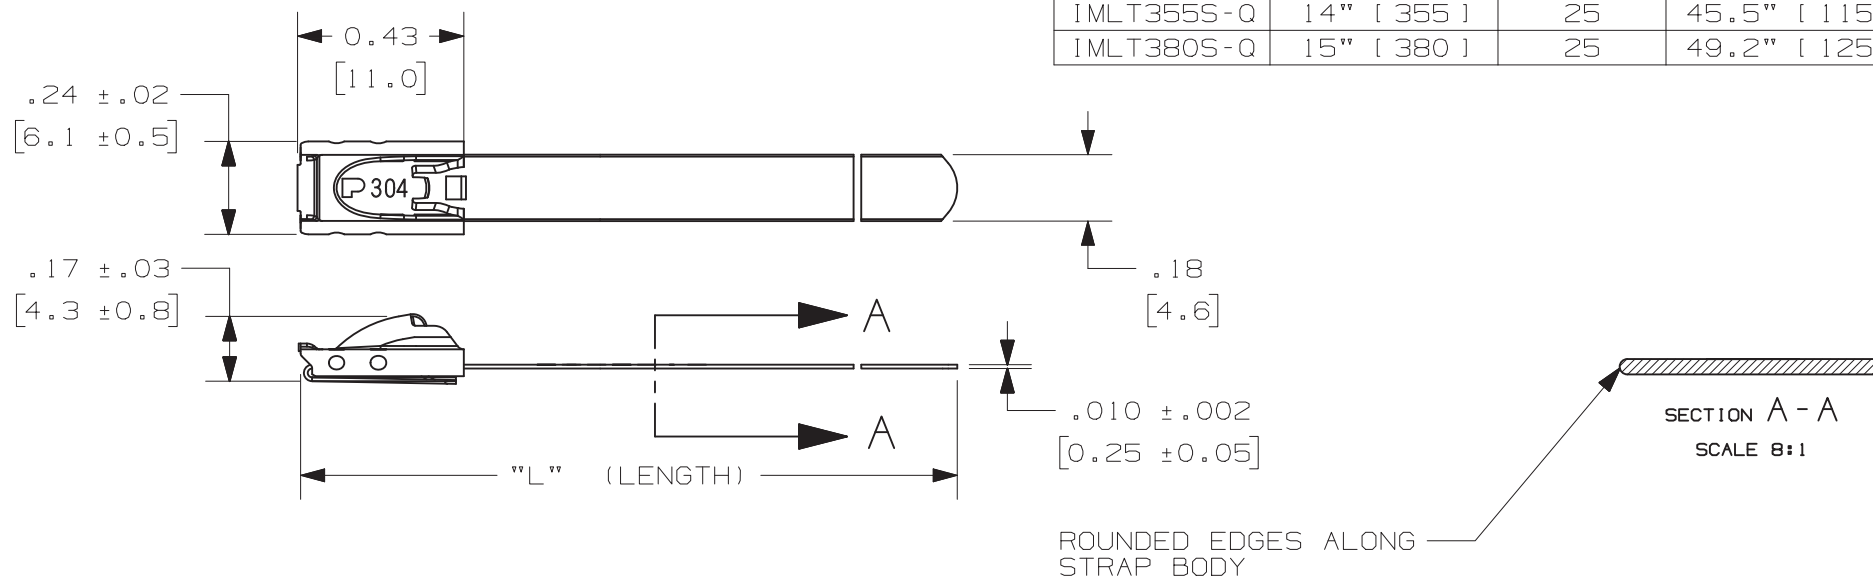

							TITLE IMLT STANDARD SINGLE LOOP ASSEMBLY 304 STAINLESS STEEL CUSTOMER DRAWING					
							ITEM REVISION NAME 15L355BB/02			PANDUIT		
							DATASET FILE NAME 15L355BB_DC/02A					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .XX ± .XXX ± ANGLES ±  THIRD ANGLE PROJECTION					
02A	8-3-21	JBN	MRJS	JADE	REMOVED GS4MT AND ADDED GS4MT-E APPLICATION TOOLS	102878				MATERIAL: 304 STAINLESS STEEL		
01	1/16	JSUN	JSUN	RGR0	REMOVE A NOTE	LPECN_15L355BB_DC/01				DRAWING NUMBER: 15L355BB_DC		
00	1/16	JSUN	JSUN	RGR0	INITIAL RELEASE	LPECN_15L355BB_DC/00						
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY JSUN	DATE 1/16	CHK JSUN	SCALE N/A	SHT 1 OF 1	SIZE A