


NOTES:

1. MATERIAL:
BODY - ALUMINUM, TIN PLATED
SCREW - ALUMINUM, TIN PLATED
2. UL LISTED & CSA CERTIFIED FOR USE UP TO 600V &
TEMPERATURE RATED 90 °C (AL9CU)
3. DUAL RATED FOR USE WITH COPPER OR ALUMINUM
STRANDED CODE CONDUCTOR
4. THESE PARTS ARE RoHS COMPLIANT
5. USE OF OXIDE INHIBITING JOINT COMPOUND LIKE
PANDUIT CMP-100 RECOMMENDED FOR PAD TO PAD
AND CONDUCTOR SURFACES
- △D

6. SEE INSTRUCTION SHEET T-PMPI-223-PC FOR
TIGHTENING TORQUE INFORMATION

7. PKG QTY:
3 = 3

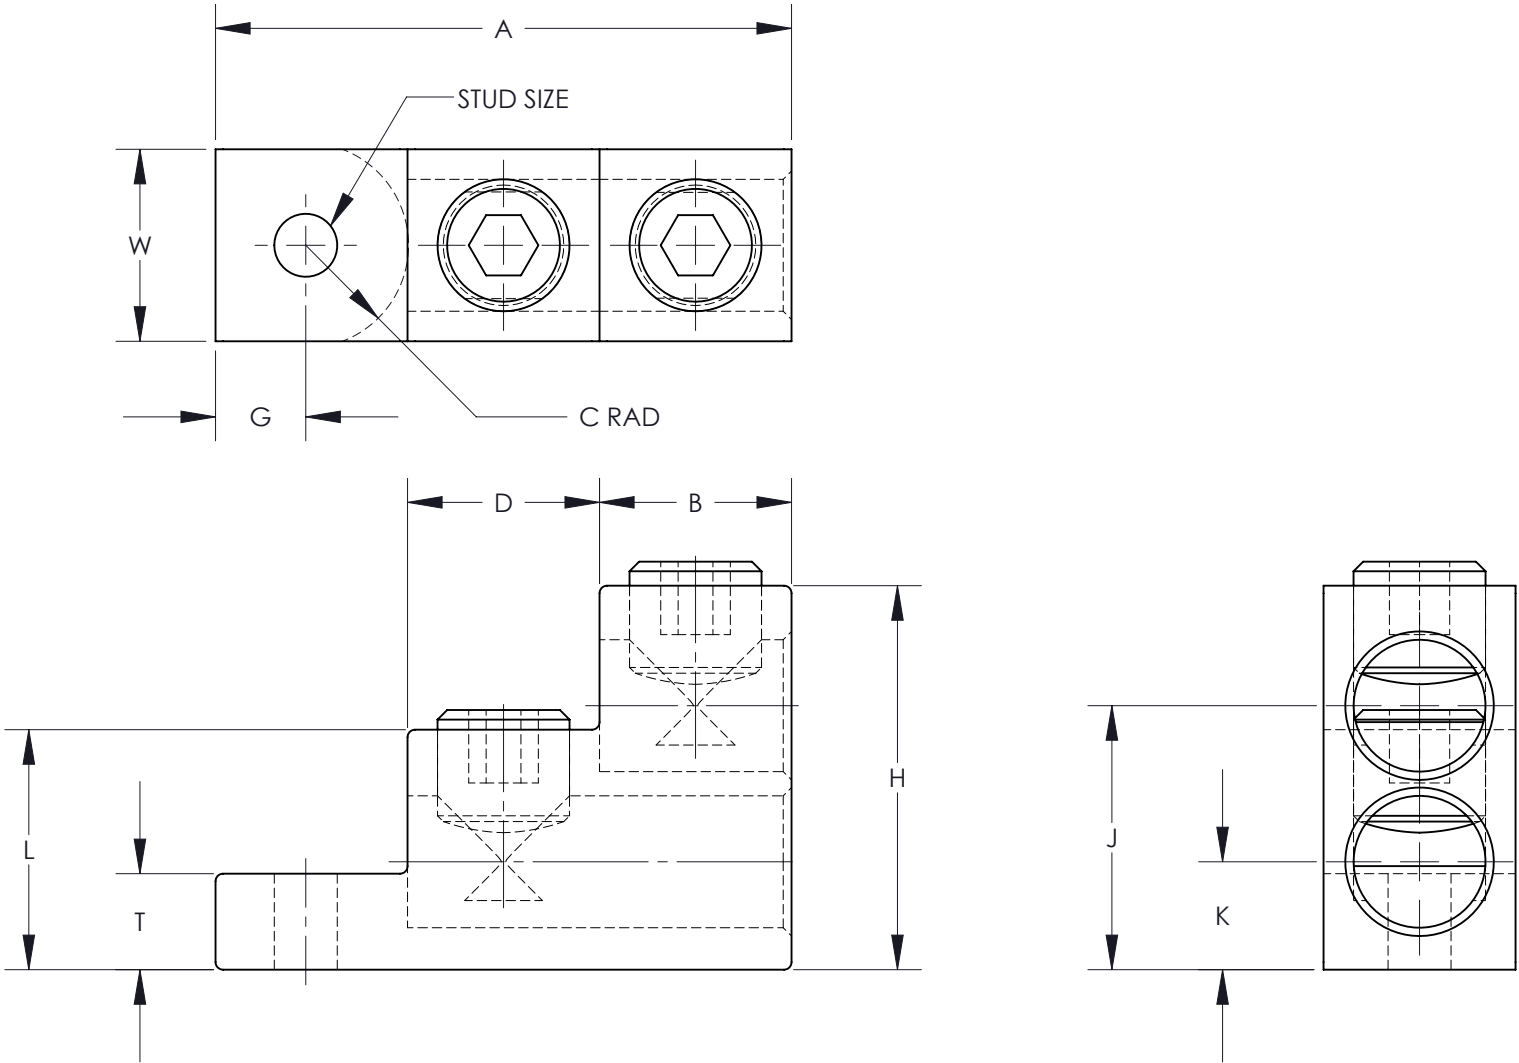

△B

△A

△C

PART NUMBER	DIMENSIONS - IN [mm] +/- .02 [.5]											STUD SIZE	WIRE STRIP LENGTH	WIRE RANGE	HEX KEY*
	A	B	D	G	T	H	W	C MAX.	J	K	L				
LAM2SA300-56-3	3.00 [76.2]	1.00 [25.4]	1.00 [25.4]	.47 [11.9]	.50 [12.7]	2.00 [50.8]	1.00 [25.4]	.53 [13.5]	1.38 [35.1]	.56 [14.2]	1.25 [31.8]	5/16	1.02 [25.9]	300kcmil-6 AWG	5/16
LAM2SA300-38-3	3.00 [76.2]	1.00 [25.4]	1.00 [25.4]	.47 [11.9]	.50 [12.7]	2.00 [50.8]	1.00 [25.4]	.53 [13.5]	1.38 [35.1]	.56 [14.2]	1.25 [31.8]	3/8	1.02 [25.9]	300kcmil-6 AWG	5/16

* HEX SIZE MAY DIFFER FROM CHART. DIFFERENCE IN SIZE WILL NOT AFFECT FIT, FORM, OR FUNCTION OF PART

							TITLE LAM2SA SERIES ALUMINUM MECHANICAL LUGS CUSTOMER DRAWING															
							ITEM REVISION NAME N41360BB/05				PANDUIT											
							DATASET FILE NAME C41360 r05.SLDDRW															
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .XX ± THIRD ANGLE PROJECTION .XXX ± ANGLES ±				MATERIAL SEE NOTES											
05	8/22	JHNU	JHNU	ALP	D. REVISED NOTE 6 TO REFERENCE INSTRUCTION SHEET T-PMPI-223-PC				125543													
04	2/13	JHNU	JHNU	RGB	REVISED TITLE BLOCK				N41360BB-C41360		DRAWING NUMBER C41360											
REV	DATE	BY	CHK	APR	DESCRIPTION				ECN		DRAWN BY CJW		DATE 12/02		CHK		SCALE NONE		SHEET 1 OF 1		SIZE B	